



CONGRATULATIONS!

**You are the new owner of
TT AIRFLEX Ergonomic Chair!**

**Flip to the back to get started.
Thank you for your support!**

ATTENTION

- Please read the instruction manual completely before assembly.
- Remove all parts from carton and ensure all parts are included prior to assembly.
- You are advised to wear protective gloves when assembling the chair.
- Do not tighten screws fully until you have completed assembly.
- It is highly recommended that you assemble the chair on a carpeted floor surface so as to prevent scratches.
- Sit correctly with your back fully aligned with the backrest. Do not sit on the armrests or the edge of the chair.
- Do not use excessive force when tilting the chair.
- Avoid exposing the chair to direct sunlight to prevent the color from fading.
- Gently clean the chair and avoid scrubbing the chair excessively.
- Check the chair parts on a monthly basis to ensure they are still functioning correctly.

WHAT'S IN THE BOX

A - BACKREST	B - SEATBASE	C - ARMREST	D - FULL-TILT MECHANISM	E - WHEELBASE	F - GAS LIFT
G - CASTORS	H - SCREWS	I - ALLEN KEY			

REMARK: Screws are packed separately and can be found in the carton.

- 1** Install the casters by inserting the metal connectors into the holes.

G - CASTORS



E - WHEELBASE

- 2** Install the hydraulic piston so that it covers the center of the wheelbase.



F - GAS LIFT

E - WHEELBASE

- 3** Attach both left and right armrest to the sides of the backrest using four of the H screws. Do not over-tighten the screws.




- 4** Follow the step sequence below to attach the two armrests to the bottom of the seatbase with the four H screws.



- 5** Attach the tilt mechanism to the bottom of the seatbase using the different H screws. Tighten well all the screws after assembling, including those from step 3 and step 4.



- 6** Complete the assembly by installing the two halves of the chair together. Connecting the gas lift to the mechanism piece.

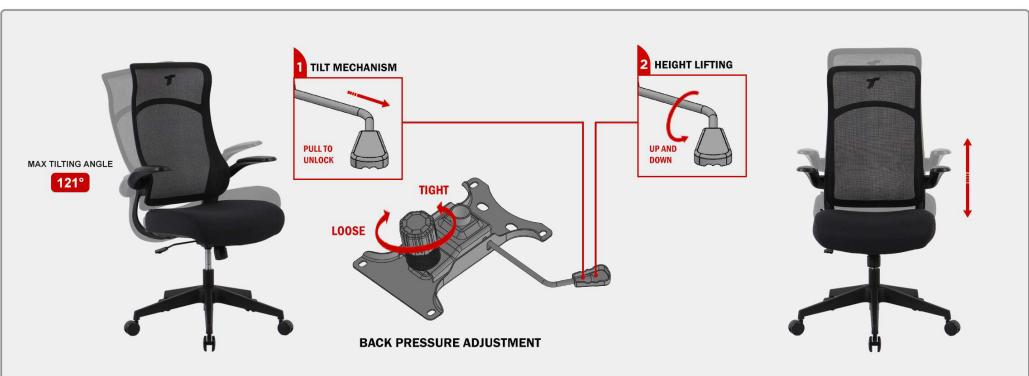

To ensure a smooth assembly process, avoid tightening the screws fully before all of them are properly positioned and loosely fitted.

To ensure a smooth assembly process, avoid tightening the screws fully before all of them are properly positioned and loosely fitted.