



DATE STAMPS

RF-SERIES: REMAINS FLUSH

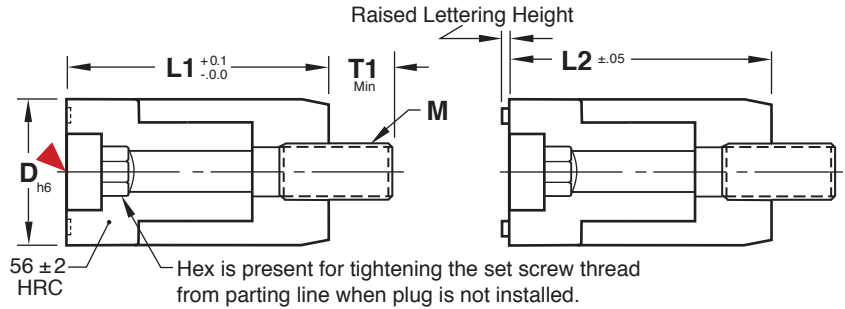

PLUGS

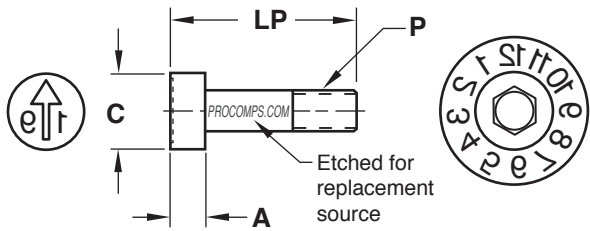

M 1.4034 H 54-58 HRC

RECESSED CATALOG NUMBER	C	A	LP	P	Engraving Depth (Arrow)	Raised Slot Depth
DFP03-19	1.6	2.0	9.0	M1 x 0.25	.30	N/A†
DFP04-19	2.5	2.3	10.5	M1.4 x 0.2	.30	.25
DFP05-19	3.1	2.8	13.0	M1.6 x 0.2	.40	.30
DFP06-19	3.1	2.8	13.0	M1.6 x 0.2	.40	.30
DFP08-19	4.6	4.0	14.0	M2.5 x 0.35	.40	.35
DFP10-19	4.6	4.0	14.0	M2.5 x 0.35	.40	.35
DFP12-19	6.4	4.0	17.0	M3 x 0.5	.60	.40
DFP16-19	8.4	5.0	23.0	M3.5 x 0.6	.60	.40

† 3mm size not available with raised lettering.

RINGS



RECESSED CATALOG NUMBER	D	L1 Recessed	L2 Raised	M	T1	T2
DF03	3	14	N/A†	M2 x 0.4	4	N/A†
DF04	4	14	13.80	M2 x 0.4	4	3
DF05	5	17	16.75	M3 x 0.5	4	3
DF06	6	17	16.75	M3 x 0.5	4	3
DF08	8	20	19.70	M4 x 0.7	4	4
DF10	10	20	19.70	M5 x 0.8	4	4
DF12	12	25	24.70	M6 x 1.0	6	6
DF16	16	33	32.70	M8 x 1.25	8	8

▶ CAD insertion point

Additional Plug and Ring Options: Specify catalog number as shown below for the different style plugs and rings.

Plug Styles: Recessed Lettering

Arrow Only
Cat #: DFP-Diam-AO
Ex.: DFP05-AO

C
Cat #: DFP-Diam-C
Ex.: DFP05-C

Plug Styles: Raised Lettering

Year
Cat #: DFRP-Diam-Year*
Ex.: DFRP05-19

Arrow Only
Cat #: DFRP-Diam-AO
Ex.: DFRP05-AO

C
Cat #: DFRP-Diam-C
Ex.: DFRP05-C

Ring Styles: Recessed Lettering

0 - 9
Cat #: DFN-Diam
Ex.: DFN05

A - M
Cat #: DFA-Diam
Ex.: DFA05

N - Z
Cat #: DFZ-Diam
Ex.: DFZ05


Blank
Cat #: DF-Diam-B
Ex.: DF05-B

Days
Cat #: DFL-Diam
Ex.: DFL05

Years
Cat #: DFY-Diam-Starting Year*
Ex.: DFY05-19

Installation Guidelines:

Ring can be installed using the included set screw or retained with a screw from the back.

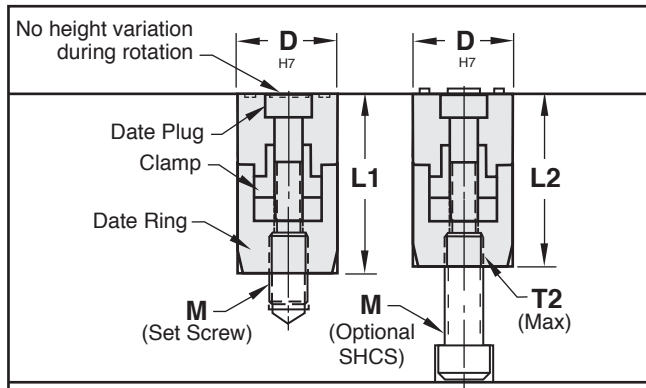

Maximum mold temperature: 450° F (230° C)

Ring Styles: Raised Lettering

0 - 9
Cat #: DFRN-Diam
Ex.: DFRN05

A-M
Cat #: DFRA-Diam
Ex.: DFRA05

N-Z
Cat #: DFRZ-Diam
Ex.: DFRZ05

Days
Cat #: DFRL-Diam
Ex.: DFRL05

Months
Cat #: DFR-Diam
Ex.: DFR05

Years
Cat #: DFRY-Diam-Starting Year*
Ex.: DFRY05-19

*Where years are specified, any year can be ordered by changing the suffix. Example DFP05-20 or DFY05-21.

Special configurations are available.
Contact Customer Service for more information.