




DATE STAMPS TAPERED SERIES



PLUGS

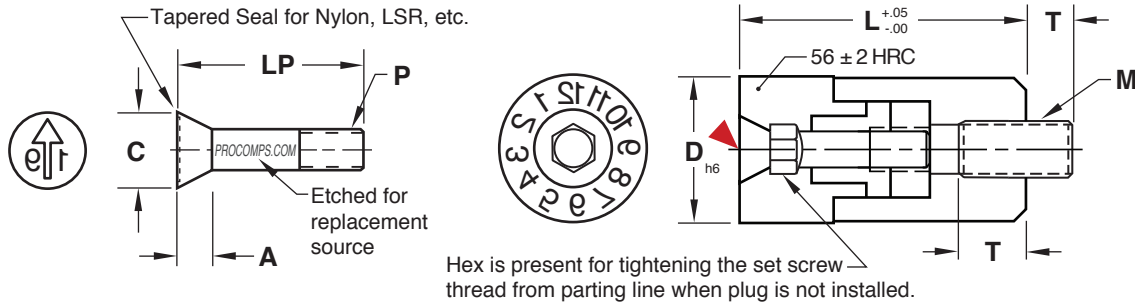

M 1.4034 **H** 54-58 HRC


CATALOG NUMBER	C	A	LP	P	Engraving Depth (Arrow)
DTPRP04-19	2.5	2.3	10.5	M1.4 x 0.2	.30
DTPRP05-19	3.1	2.8	13.0	M1.6 x 0.2	.40
DTPRP06-19	3.1	2.8	13.0	M1.6 x 0.2	.40
DTPRP08-19	4.6	4.0	14.0	M2.5 x 0.35	.60
DTPRP10-19	4.6	4.0	14.0	M2.5 x 0.35	.60
DTPRP12-19	6.4	4.0	17.0	M3 x 0.5	.60
DTPRP16-19	8.4	5.0	23.0	M3.5 x 0.6	.60
DTPRP20-19	11	6.5	23.0	M3.5 x 0.6	.60

RINGS





CATALOG NUMBER	D	L	M	T	Engraving Depth
DTPR04	4	14	M2 x 0.4	3	.15
DTPR05	5	17	M3 x 0.5	3	.20
DTPR06	6	17	M3 x 0.5	3	.20
DTPR08	8	20	M4 x 0.7	4	.30
DTPR10	10	20	M5 x 0.8	4	.30
DTPR12	12	25	M6 x 1.0	6	.30
DTPR16	16	33	M8 x 1.25	8	.30
DTPR20	20	33	M8 x 1.25	8	.30

Additional Plug and Ring Options: Specify catalog number as shown below for the different style plugs and rings.





Plug Styles: Recessed Lettering


Arrow Only
 Cat #: DTPRP-Diam-AO
 Ex.: DTPRP05-AO


C
 Cat #: DTPRP-Diam-C
 Ex.: DTPRP05-C


Ring Styles: Recessed Lettering


0 - 9
 Cat #: DTPRN-Diam
 Ex.: DTPRN05

A - L
 Cat #: DTPRA-Diam
 Ex.: DTPRA05

0 - 30
 Cat #: DTPRT-Diam
 Ex.: DTPRT05


M - X
 Cat #: DTPRZ-Diam
 Ex.: DTPRZ05

Blank
 Cat #: DTPR-Diam-B
 Ex.: DTPR05-B

Years
 Cat #: DTPRY-Diam-Starting Year*
 Ex.: DTPRY05-19

Installation Guidelines:

Ring can be installed using the included set screw or retained with a screw from the back.

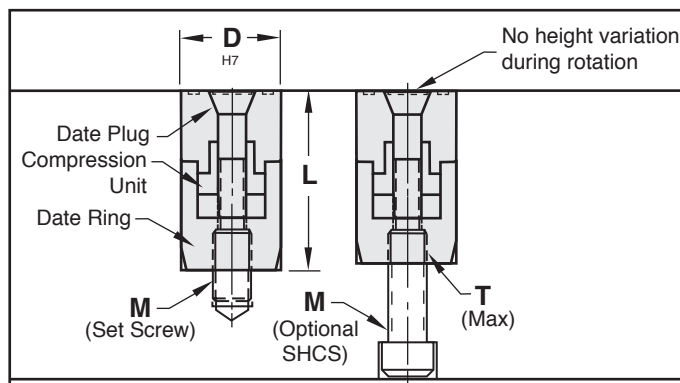

Maximum mold temperature: 450° F (230° C)

*Where years are specified, any year can be ordered by changing the suffix. Example DTPR05-20 or DTPRY05-21.

To create Date Stamps for days, purchase both the 0-30 ring (DTPRT) and the 0-9 ring (DTPRN) and the desired plugs.

Special configurations are available.
 Contact Customer Service for more information.