




SOCKET CONNECTORS

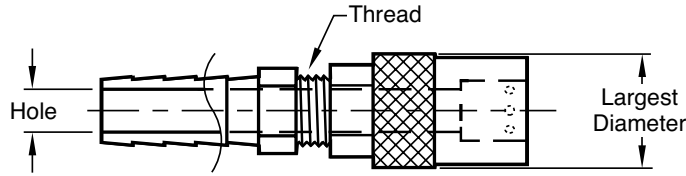

M Brass with Stainless Steel Bearings and Silicone Seals

- Pressure to 200 psi
- Max temp = 400° F

		200 SERIES (1/4" Hole)			300 SERIES (3/8" Hole)			500 SERIES (1/2" Hole)		
		CATALOG NUMBER	Hose ID	Largest Diam.	CATALOG NUMBER	Hose ID	Largest Diameter	CATALOG NUMBER	Hose ID	Largest Diameter
S T R A I G H T		SC204	1/4	.71	SC306	3/8	.97	SC504	1/2	1.21
		SC205	5/16	.71	SC308	1/2	.97	SC506	3/4	1.21
		SC206	3/8	.71						
90° S T E M		SC214	1/4	.71	SC316	3/8	.97	SC514	1/2	1.21
		SC215	5/16	.71	SC318	1/2	.97	SC516	3/4	1.21
		SC216	3/8	.71						
45° S T E M		SC224	1/4	.71	SC326	3/8	.97	SC524	1/2	1.21
		SC225	5/16	.71	SC328	1/2	.97	SC526	3/4	1.21
		SC226	3/8	.71						
Socket Body Only 	CATALOG NUMBER	Thread		CATALOG NUMBER	Thread		CATALOG NUMBER	Thread		
	SC200B	1/8		SC300B	1/8		SC500B	1/2		
	SC200B-4	1/4		SC300B-4	1/4					
Replacement Seals: Silicone (Red)		SC200S			SC300S			SC500S		
Replacement Seals: Viton (Black)		SC200S-V			SC300S-V					

Note: 200 and 300 Series Straight Socket Connectors are manufactured from a single piece, not assembled as shown.

Alternative materials and configurations available:

To order valved style Socket Connectors or Bodies, add a "-V" to the end of the catalog number. Ex. SC316-V.

To order Socket Connectors or Bodies with barbs for Push-Lok® hose, specify "-PL" at the end of the catalog number. Ex. SC326-PL or SC300-V-PL.

Note: Valved versions (-V or -V-PL) are not available in the 500 series.