
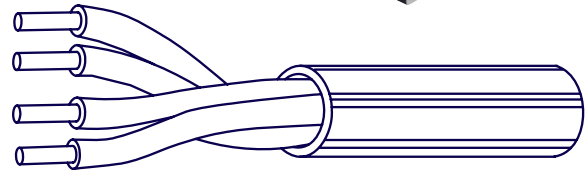


PRODUCT SPECIFICATION

INTRODUCTION

For inter-connecting wiring, suitable for use in security alarm systems. Use in low voltage/low current applications such as intercommunication.

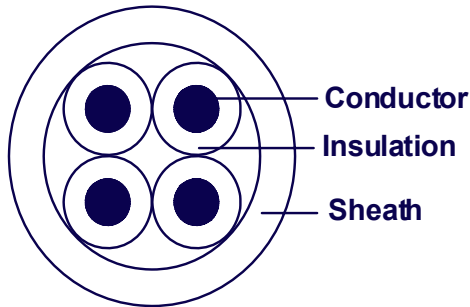

SPECIFICATION:

Conductor

Material : Stranded Plain Annealed Copper Wire
Stranding : 14/0.2mm

Insulation

Material : PVC
Nominal I.D : 1.5mm
Color : White, Blue, Red, Black

Sheath

Material : PVC
Nominal O.D : 4.7mm
Color : White

Physical Properties

Min. Bend Radius : 47mm
Operating Temperature :-15OC to 70OC

Electrical Properties

Nom. DC resistance : 45.2Ω/km
Voltage test : Core to Core : 1000V a.c / 1min

Applicable Standard

EU RoHS Complies