

In/Out Door Thermometer

In/Out Door Thermometer




We thank you for the purchase of Baldr In/Out Door Thermometer With Sensor. It has been designed and constructed using innovative components and techniques to enable the perfect display of indoor and outdoor temperature by this device. Please read the instructions carefully to become familiar with the properties and functions, before you use the unit.


For the start-up of this device you require: 2x"AAA" batteries(not included) for main unit
2x"AAA" batteries(not included) for sensor

OVERVIEW

MAIN UNIT

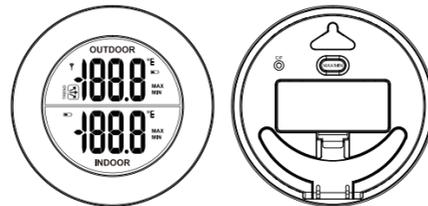

SENSOR



FEATURES

1. Indoor and outdoor temperature display
2. Indoor temperature range: 0 C -50 C
3. Outdoor temperature range: -30 C -60 C
4. C / F switchable
5. Outdoor Temperature Trend
6. Max/Min record of indoor and outdoor temperature data
7. Low power indicator for both main unit and external sensor

GETTING STARTED POWER SUPPLY

MAIN UNIT INSTALLATION

1. Remove the battery compartment cover
2. Insert 2*AAA batteries matching the polarity (+and-).

SENSOR INSTALLATION

1. Remove the battery compartment cover.
2. Insert 2xAAA batteries matching the polarity (+and-).

BUTTON FUNCTION

1. Press "MAX/MIN", the current indoor temperature/outdoor temperature will alternate between the MIN/MAX temperature recordings and the current value.
2. Press "C / F" key to switch between C and F display

433 MHz RECEPTION CHECK

The transmission range is about 30 meters from the transmitter to the weather station (in open area). The weather station should receive the temperature data within 3 minutes after set-up. If the temperature data is not received in 3 minutes after setting up,

please check

1. The distance of weather station or transmitter should be at least 5~6.5 feet (1.5~2 meters) away from any interfering sources such as computer monitors or TV sets.
2. Avoid positioning the weather station onto or in the immediate proximity of metal window frames.
3. Using other electrical products such as headphones or speakers operating on the same signal frequency.
4. Neighbors using electrical devices operating on the same signal frequency can also cause interference.

If your sensor still can not successfully receive RF signal, after every 60 minutes, main unit will re-start signal searching for 3 seconds and CH symbol will flash.

POSITIONED METHODS

The clock can be positioned in 2 ways as desired.

- A. Pull out the table stand from the back of the main unit, and place on table or desk as desired.
- B. Hang on the wall by hanging hole

PRECAUTIONS

- Do not clean any part of the product with benzene, thinner or other solvent chemicals. When necessary, clean it with a soft cloth.
- Never immerse the product in water. This will damage the product.
- Do not subject the product to extreme force, shock, or fluctuations in temperature or humidity.
- Do not tamper with the internal components.
- Do not mix new and old batteries or batteries of different types.
- Do not mix alkaline, standard or rechargeable batteries with this product.

- Remove the batteries if storing this product for a long period of time.
- Do not dispose of this product as unsorted municipal waste.
- Collection of such waste separately for special treatment is necessary.

WARRANTY

- BALDR provides a 1-year limited warranty on this product against manufacturing defects in materials and workmanship.
- Warranty service can only be performed by our authorized service center. The original dated bill of sale must be presented upon request as proof of purchase to us, or our authorized service center.
- The warranty covers all defects in material and workmanship with the following specified exceptions:(1) damage caused by accident, unreasonable use or neglect (including the lack of reasonable and necessary maintenance); (2) damage occurring during shipment (claims must be presented to the carrier); (3) damage to, or deterioration of any accessory or decorative surface;(4) damage resulting from failure to follow instructions contained in your owner's manual.
- This warranty covers only actual defects within the product itself, and does not cover the cost of installation or removal from a fixed installation, normal set-up or adjustments, claims based on misrepresentation by the seller or performance variations resulting from installation-related circumstances.
- To receive warranty service, the purchaser must contact with BALDR nominated service center for the problem determination and service procedure.
- Thank you for your choice of BALDR products!

www.baldr.com
service@baldr.com