

WMF espresso

The perfect espresso.
Handmade automatically.





Automatically perfect espresso

The new WMF espresso detects the portafilter automatically, controls the brewing time, signals when the grinding degree needs readjusting, grinds the coffee and tamps with 100% consistency. Everything you need for a perfect espresso.

Technical specifications

WMF espresso

Hourly output*	Up to 300 cups Espresso or Café Crème Cappuccino, Latte Macchiato or Milk coffee
Nominal output/Power supply	5.5 kW/208 V
Coffee bean hopper	Each approx. 11lb
Outer dimensions (width/height/depth)	28in/23in/22in
Empty weight	165lbs
Continuous sound pressure level (LpA)**	< 70 dB(A)

* Depending on nominal output, power supply and recipe settings.
** The A-rated sound pressure level LpA (slow) and LpA (impulse) at service staff work stations is under 70 dB(A) in any operating mode.
Above 5° dKH (water hardness) a WMF water filter must be fitted.

All technical changes, typographical mistakes and errors reserved for the entire contents.



Product design by designship, Ulm



Two integrated grinders and automatic tamping. (Fig. with additional feet and two trays for coffee grounds)




Heated cup storage
With soft closure.



Brew-time monitoring
Monitoring and software-assisted grinding degree setting.



Air-cooled bean hoppers
For two different varieties of coffee bean.

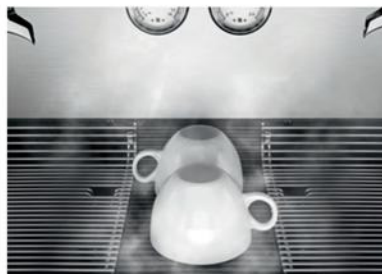

SteamJet
For centralised preheating of up to two cups.



Double-sided, upward-folding cup grids
Providing optimal pouring height for cups.

SBS

Specialty beverage and food service equipment solutions

toll free: 1-888-805.5528 | fax: 1-888-805-5541 | email: sales@SBSolutions.ca | www.sbsolutions.ca