

Point Pod Connect



Point Pod Connect
Silver – PPCV815

Colour: Anodised Aluminium

Silver – with white sockets
and surrounds

Material: Polyamide and ABS

2 year Warranty on all
parts and labour



Point Pod Connect
Black – PPCV815B

Colour: Anodised Aluminium

Black – with Black sockets and
surrounds

Material: Polyamide and ABS

2 year Warranty on all
parts and labour

Dimensions

Hole Size: 4 (in) Diameter

Inner Disc: 3 and 11/16 Width

Space Required in cabinet:

18 (in) depth, 6 and 5/16 (in)
in diameter at mounting
flange, 4 (in) for body

Hole Size: 4 (in) Diameter

Inner Disc: 3 and 11/16 width

Space Required in cabinet:

18 (in) depth, 6 and 5/16 (in)
in diameter at mounting
flange, 4 (in) for body

Weight: 6 pounds 12 ounces

Weight: 6 pound 12 ounces

Socket Configuration:

2 x North American
outlets, 1 x 3.0a USB A
& 2 x 3.0a USB C

Cable Length: 6ft

Socket Configuration:

2 x North American
outlets, 1 x 3.0a USB A
& 2 x 3.0a USB C

Cable Length: 6ft

Electrical Data



Supply Voltage: 125ac 60Hz

Max Current: 15a or 1875W

Supply Voltage: 125ac 60Hz

Max Current: 15a or 1875W

Point Pod Connect

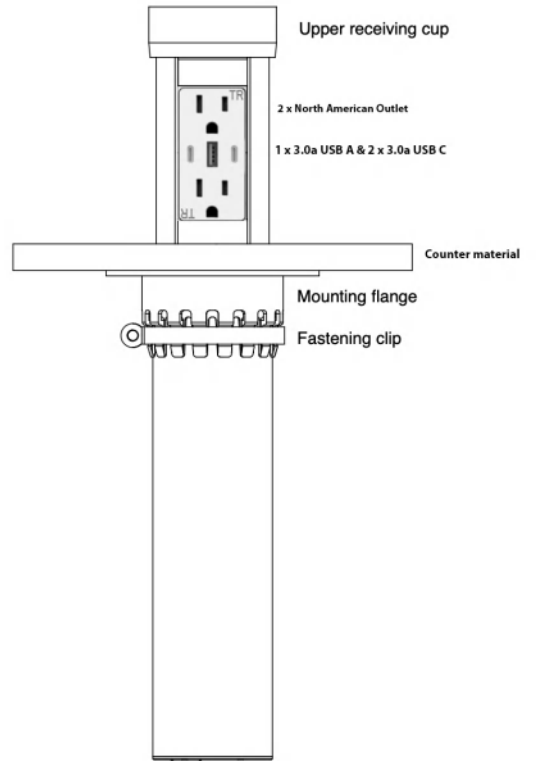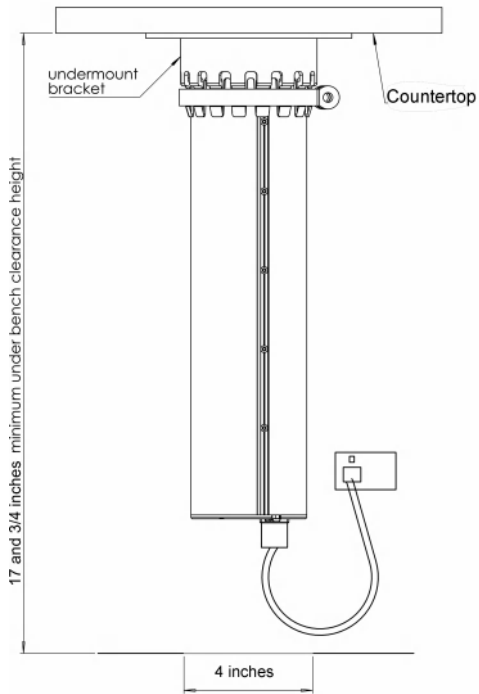

Total load connected not to exceed rating

For indoor use only

ETL Listed, UL 962A & CSA C22.2
US Patent # US 10 777 985 B2

IP rating - IP44

Designed and engineered in Australia

Made in Vietnam