


Ordering Information


Example: LST815WBV1-40K-N-T

| Product | Power | Replacement | Color Temperature | Package | Furniture |
|------------|-------|-------------------------|------------------------|----------------|-----------|
| LST815WBV1 | 15W | 40-60W fluorescent tube | 40K 4000K 50K 5000K | PN not dimming | white |

Installation Options



Photometrics

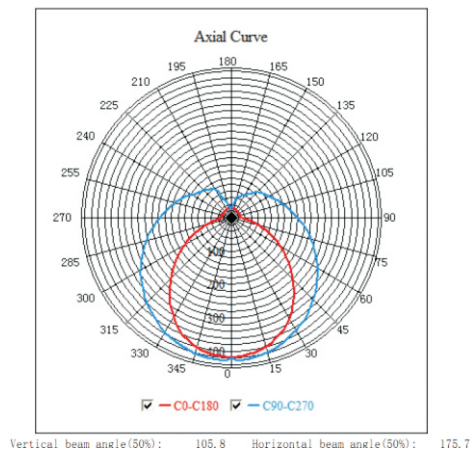


Projected LED Lumen Maintenance

| Operating hours | 0 | 25000 | 50000 |
|--------------------------|---|-------|-------|
| Lumen maintenance factor | 1 | 0.91 | 0.8 |

Data references the extrapolated performance projections for the Nano T platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA 80-08 and projected per IESNA TM-21-11).

Dimensions:

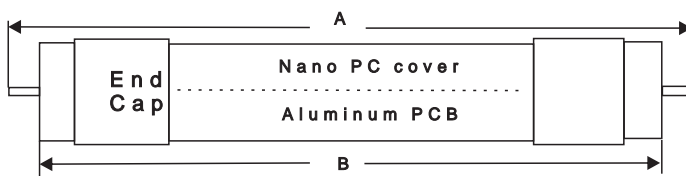

| A (mm) | B (mm) |
|----------|----------|
| 1213±1.0 | 1198±1.0 |

After sale Service:

The product refers to electricians knowledge. Please don't disassemble it by yourself. If any problem happens, please contact the factory for warranty details.

NOTE: Actual performance may differ as a result of end-user environment and application. Without notice.