

# LS - ES038

# LED Emergency Exit Sign



## FEATURES

Injection-molded thermoplastic ABS housing

UL-94V-0 flame rating, fire-resistant

Input Voltage: 120/277V

Power consumption: 4W max.

Output: 1W max.


1.2V Nickel Cadmium Battery

Charging time: 24 hours

Discharge time: 90 minutes

Operating temperature: 0°C~40°C

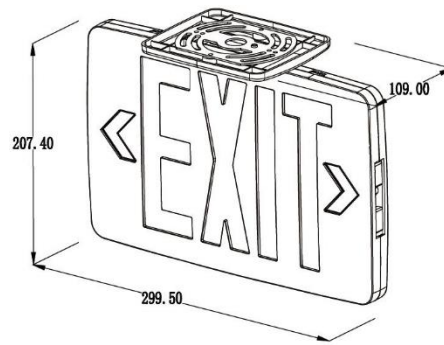

Dimension: 299.5\*207.4\*109mm



## Optional Color



## ORDER INFORMATION

Picture	Model	Voltage	Color	Discharge time	Certificate
	LS-ES038R	120/277V	RED	90 minutes	UL, CUL
	LS-ES037G	120/277V	GREEN	90 minutes	UL, CUL