

## Attachments




**Ferrule** Use on flat, dry ground only. In rough terrain or to use other attachments, pull the ferrule off to remove & store safely for future use.



**Mud Basket** Remove ferrule and screw firmly onto tip in muddy and wet conditions.

## Strap

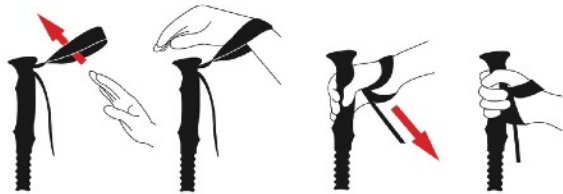

The adjustable strap should be tightened as shown above. Please make sure the block on the strap mechanism is pushed firmly back into the handle after making adjustments.

## Refolding your pole

To refold the pole for storage:

- Undo the locking mechanism if necessary to move down to the silver collar. Close the locking mechanism
- Press the silver detent button in with your thumb or finger and slide the section below the silver collar back into the handle section
- Loosen the other sections and fold them up; refasten with the



## Instructions for using your folding pole

Please visit our 'Product Support' page on [www.trekrite.co.uk](http://www.trekrite.co.uk) for full instructions and videos showing how to assemble and adjust your pole.



If you have any questions, please call us on  
01225 571594.



Follow us on Twitter: @trekrite



PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE USING THE POLE FOR THE FIRST TIME TO ENSURE THAT YOU ASSEMBLE THE POLE CORRECTLY.

How to extend your pole

- Unfasten the tie strap and unfold the sections of the pole
- **IMPORTANT:** To lock the pole in its extended position you will need to pull out and lock the section below the silver collar into place. To do this, first make sure that the exterior locking mechanism is closed, then hold the handle section with one hand and draw out the second section fully (marked with the 'PULL' arrow) until the silver detent button is revealed and it locks into place (see diagram)
- Once this is done, the rest of the sections should slot together to form a solid pole. Mind your fingers!

To adjust the height of the pole, open the locking mechanism and close it once the pole is at the correct height.

If the locking mechanism slips under pressure, turn the adjustment screw (see below) clockwise slightly to tighten. This should be carried out with the locking mechanism open.



Pull the section below the silver collar out until silver button clicks into place.



Adjustment Screw

