


iO¹™ ALL-IN-ONE WIRELESS INDOOR & OUTDOOR SPEAKER



PASSIVE SURFACE MOUNT SPEAKER

Experience the versatility of the iO1 speaker, suitable for both indoor and outdoor environments, with six different orientations to choose from for the perfect placement. Connect the speakers effortlessly to any amplifier or pair them with the Lithe Audio iO1 active speaker. This passive surface mount speaker guarantees outstanding audio quality and convenient installation, while its IPX6 rating ensures durability for outdoor use.

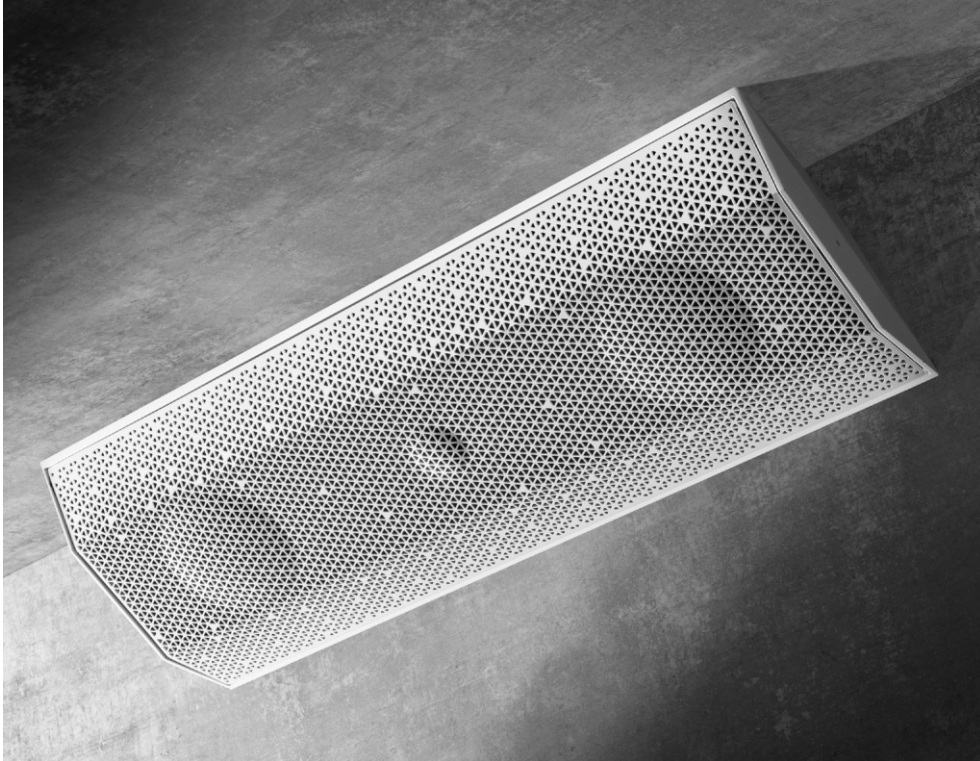

BLACK



WHITE




LIMITLESS INSTALL POSSIBILITIES



ON WALL




Ideal for any wall mount application where you want to focus audio directly to an indoor or outdoor seating area.

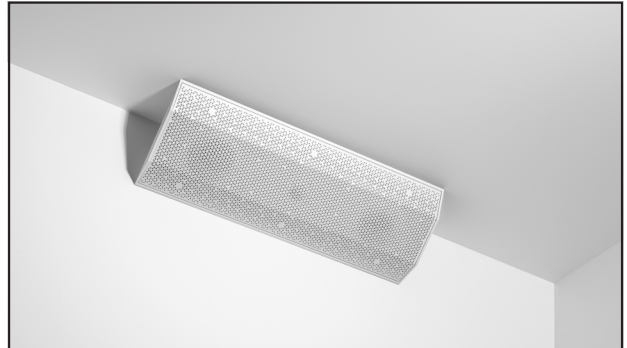

IN CORNER




Ideal for any corner such as eaves in the garden or corners of rooms. Can mount horizontally or vertically.

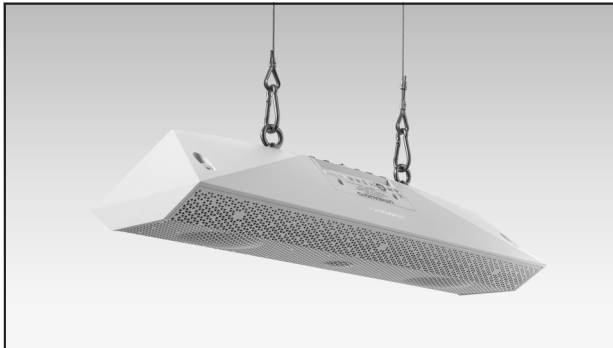

PENDENT



Ideal for pendent hanging over a kitchen island, a dining table, a hot tub or in a pergola. Eyelet kit sold seperately.

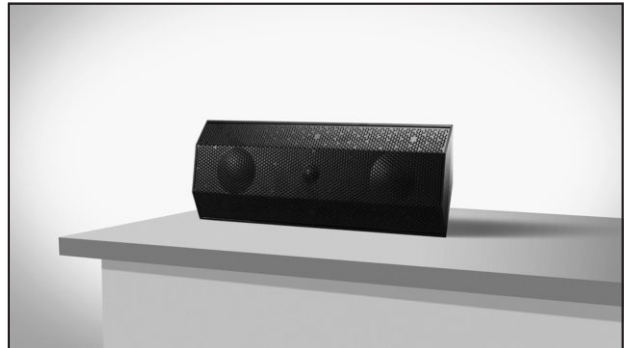

COUNTER TOP




Ideal for on a bookcase, dining room sideboard, a desk or above a kitchen unit.



GROUND SPIKE



Different applications available - floor mount (on decking), hinged (wall mount) or ground spike. Sold separately.

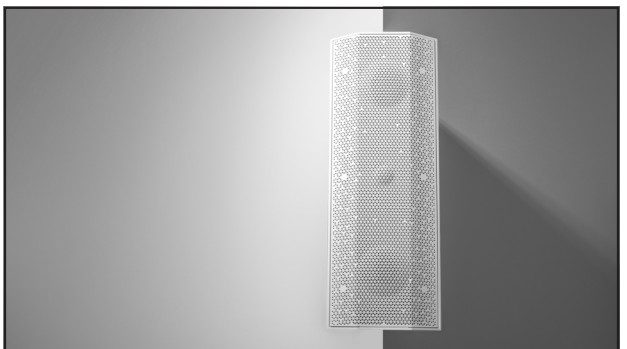

ON CORNER




Ideal for corners of a room, where you want to focus audio directly into an area.

(Ground Spike and Pendent mounting kit sold separately)

WORKS WITH ANY AMPLIFIER

Immerse yourself in the powerful sound of Lithe Audio by seamlessly connecting this speaker to any amplifier. With its impressive 100W RMS output, this passive speaker is perfect for a wide range of applications, delivering exceptional audio quality. Not only does it provide an incredible auditory experience, but its sleek design also adds a touch of elegance to your decor, ensuring that it looks amazing in any setting.

ONESPEAKER.SIXWAYS.

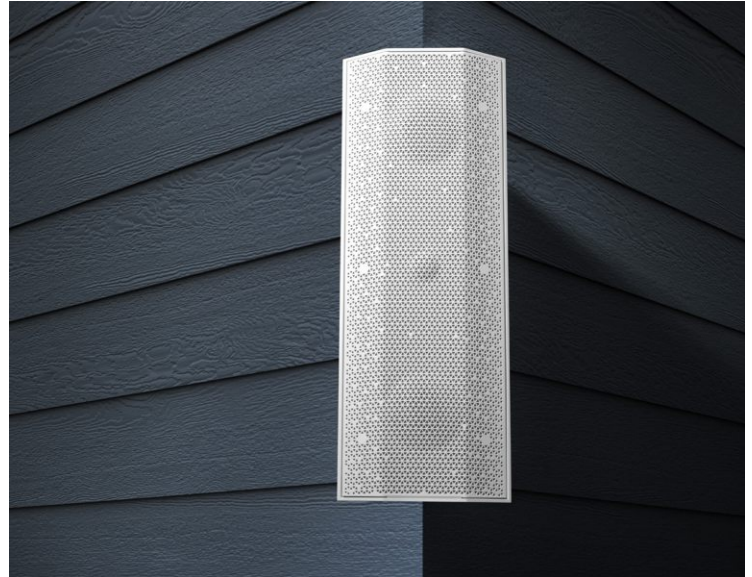

Features

Outdoor Rated to Impressive IPX6

Weather Resistant IPX6 rated protection is extremely waterproof, impenetrable by weather, high pressure jets of water and even a non-sustained total soaking

Place Anywhere

Mount 6 different ways to suit your installation requirements

Audio Spec

RMS Power: 100W RMS (2x 50W)

Frequency Response (-3dB) 60Hz - 20kHz

Frequency Range (-10dB) 38Hz - 20kHz

Impedance: 4 Ohms nominal (8 Ω)

Sound Quality THD+N <0.01%

Sensitivity (1W/1m): 82dB

Coverage (1-4kHz): Vertical 100° / Horizontal 170°

Speaker Spec

Dimensions: (H X W X D) 465 X 170 X 100mm (18.3 X 6.7 X 3.9 inches)

Colour: Matt Black or White

Woofer: 2 x 3" Waterproof Coated Paper Cone

Tweeter: 0.75" Waterproof Coated Silk Dome

Net Weight: 3.2kg (7lbs) (Single)

IP Rating: IPX6

Connectivity: Speaker Terminals

Grille: Aluminium (UV Powder Coating)

2 Year Warranty

What's in the box

Single (Passive) Speaker

IO1 Surface Mount Speaker (Passive)

Mounting Bracket

Instruction Manual

Pair (Passive + Passive) Speaker

2x IO1 Surface Mount Speaker (Passive)

2x 16AWG Speaker Cables 7m

2x Mounting Brackets

Instruction Manual

Accessories available

06851 Power Extension Lead 5m

06850 16AWG Speaker Cable 7m

06840 IO1 Garden Spike Black (Single)

06841 IO1 Garden Spike White (Single)

06852 IO1 Eyelet Kit (Single)

SKU Codes

06800 IO1 WiFi Speaker (Single) - Black

06801 IO1 WiFi Speaker (Single) - White

06810 IO1 WiFi Speaker (Pair) - Black

06811 IO1 WiFi Speaker (Pair) - White

06820 IO1 Passive Speaker (Single) - Black

06821 IO1 Passive Speaker (Pair) - Black

06830 IO1 Passive Speaker (Single) - White

06831 IO1 Passive Speaker (Pair) - White





AudioVolt
COMMERCIAL & HOME AUDIO SPECIALIST

Buy from the UK's Largest
Online Lithe Audio Retailer



audiovolt.co.uk T: 02476 36 98 90

Speaker Dimensions: Dimensions in mm (inches)

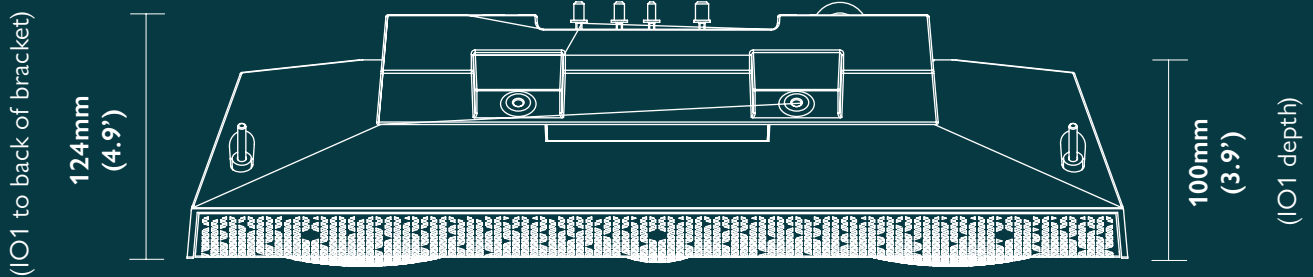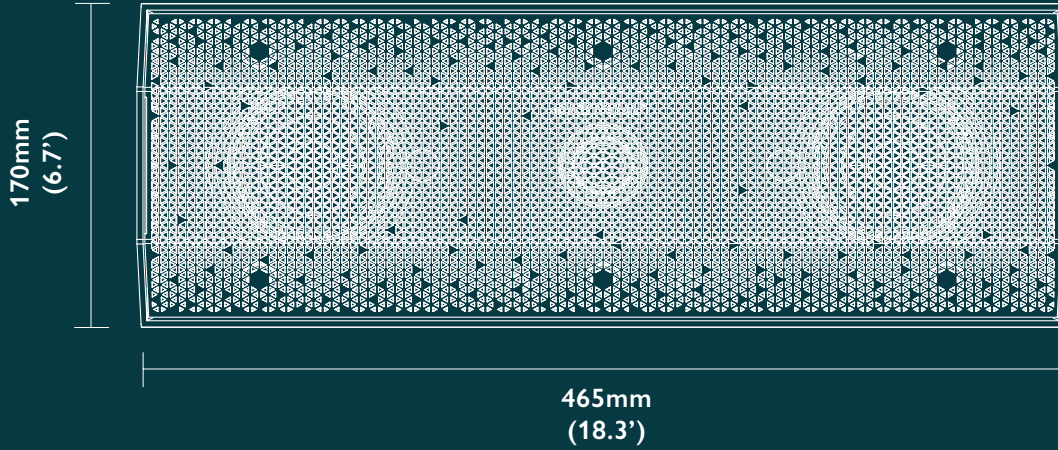

Bracket Dimensions: Dimensions in mm (inches)

