


## SA-50 - Amplifier

2 x 25  
W<sub>MAX</sub>

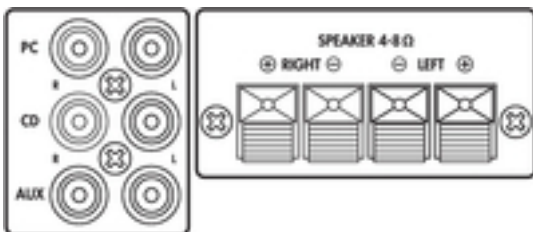

### Compact universal stereo amplifier, 25 W

- Silent operation due to fanless cooling concept
- Additional 3.5 mm connection with switchable sensitivity on the front panel
- Audio source selector switch
- Controls for volume, bass and treble
- 6.3 mm headphone output
- Robust metal housing

## Technical Data

Channels	: 2
Zones	: -
Power rating	: 25 W
Power rating at 2 Ohm	: -
Power rating at 4 Ohm	: 2 x 12.5 W
Power rating at 8 Ohm	: 2 x 10 W
Power rating at 100 V	: -
Power rating with 4 Ohm bridged operation	: -
Power rating with 8 Ohm bridged operation	: -
Peak music power output ( $P_{MAX}$ )	: 2 x 25 W
Output impedance	:
Inputs	: 115 mV/12 k Ohm (PC), 115 mV/12 k Ohm (CD), 115 mV/12 k Ohm (aux), 115 mV/12 k Ohm (player, high), 20 mV/32 k Ohm (player, low)
Attenuation factor	:
Frequency range	: 20-20,000 Hz
Crossover network	: -
Crossover frequency	: -
Integrated limiter	: -
Equalizer bass	: $\pm 12$ dB
Equalizer midrange	: -
Equalizer treble	: $\pm 12$ dB
S/N ratio	: > 65 dB
Crosstalk attenuation	: -
THD	: -
Power supply	: ~ 230 V/50 Hz/50 VA
Mains voltage	: -
Mains frequency	: 50 Hz
Power consumption, operation	: 50 VA
Power consumption, standby	: -
Standby current	: -
Operating voltage (possible alternative)	: -

Power supply (possible  
alternative)  
Admiss. ambient temp.  
Dimensions  
Width  
Height

: -  
: 0-40 °C  
: 212 x 56 x 200 mm  
: 212 mm  
: 56 mm

**INTA AUDIO**  
UNIT 6 AMPHION BUSINESS PARK  
CV6 6PD  
2476369890  
[www.inta-audio.com](http://www.inta-audio.com)



**INTA AUDIO**  
UNIT 6 AMPHION BUSINESS PARK  
CV6 6PD  
2476369890  
[www.inta-audio.com](http://www.inta-audio.com)

Depth	: 200 mm
Rack spaces, RS	: -
Weight	: 1.9 kg
Connections	: 1 x RCA L/R (PC), 1 x RCA L/R (CD), 1 x RCA L/R (aux), 1 x 3.5 mm jack (player), 4 x spring-load. speaker term. (speakers)