


TNi-W8PRO

Features


- 8-inch High Power HH Low Frequency Driver with 2-inch Voice Coil
- 1-inch Celestion CDX1-1070 High Frequency Compression Driver
- Rotatable Waveguide For Vertical or Horizontal Orientation
- 90° x 60° Coverage
- Rotatable logo
- Available in Black and White

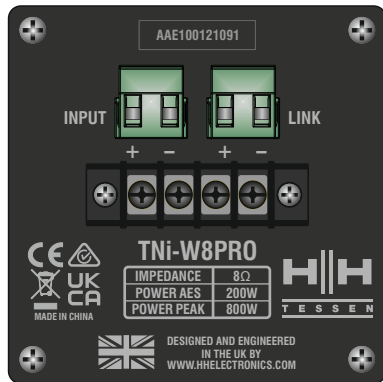

INPUT PANEL

Applications


- Bars And Clubs
- Live Sound Reinforcement
- Ballrooms
- Conference / Speech
- Worship
- Corporate AV events

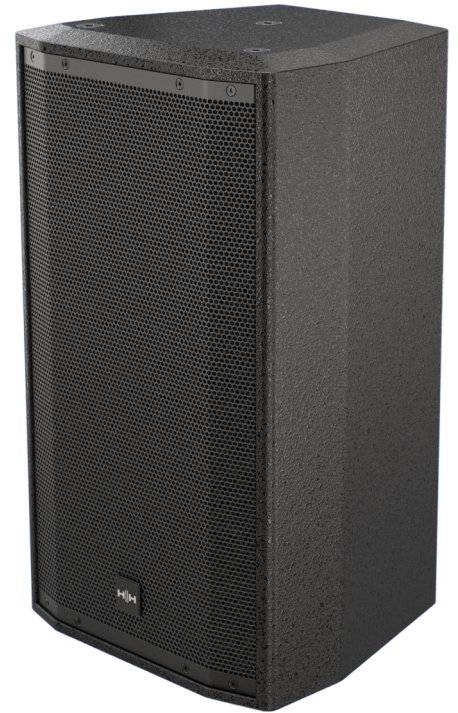


Description	The HH TNi-W8PRO is a high power, compact, 2-way, full-range loudspeaker system comprised of the HH 8-inch (2-inch voice coil) high power HH low frequency driver and 1-inch Celestion CDX1-1070 high-frequency compression driver. The HH/Celestion designed waveguide is rotatable so the loudspeaker can be used in either vertical or horizontal orientation. Flexible input connections via either M4 barrier strip or Euroblock provide versatile connecting options. Mounting options include: 7 x M10 Penn-Elcom fly points, 4 x M8 mounting points for optional TNi-BRK30 mounting bracket. All enclosed in a robust wooden enclosure, powdercoated steel grille with acoustic foam backing in black or white finish.																												
Key Features	<ul style="list-style-type: none"> High sensitivity HH woofer with exceptional linearity High performance, Celestion Designed 1.0" compression driver 90x60° directivity enables precise control of sound field Large Rotatable waveguide for vertical or horizontal orientation High power capacity to ensure impressive coverage without compression Robust all wood construction, hard wearing finish High power, high quality passive xover 7x M10 Penn-Elcom fly points 																												
Specifications	<table border="1"> <tr><td>Model</td><td>TNi-W8PRO</td></tr> <tr><td>System type</td><td>8" 2 way Passive Speaker, Bass Reflex</td></tr> <tr><td>Woofer Size</td><td>8" HH Designed High Performance Driver, 2.0" Voice Coil</td></tr> <tr><td>Tweeter Size</td><td>1.0" Celestion CDX1-1070</td></tr> <tr><td>Nominal System Impedance</td><td>8 ohm</td></tr> <tr><td>Power Rating¹</td><td>200W AES, 400W Continuous, 800W Peak</td></tr> <tr><td>Recommended Amplifier</td><td>400-800W @ 8 Ohms</td></tr> <tr><td>Sensitivity 1W/1m²</td><td>96 dB SPL</td></tr> <tr><td>Maximum SPL (1m)³</td><td>119 dB SPL, 125 dB SPL (Peak)</td></tr> <tr><td>Frequency response</td><td>52 - 20kHz (-10dB) 63 - 18kHz (-3dB)</td></tr> <tr><td>Input / Link Connector</td><td>Euro Block Connector and M4 Barrier Strip Terminal (7.62mm Pitch)</td></tr> <tr><td>Horizontal Dispersion Angle</td><td>90°</td></tr> <tr><td>Vertical Dispersion Angle</td><td>60°</td></tr> <tr><td>Crossover Frequency</td><td>2.2KHz</td></tr> </table>	Model	TNi-W8PRO	System type	8" 2 way Passive Speaker, Bass Reflex	Woofer Size	8" HH Designed High Performance Driver, 2.0" Voice Coil	Tweeter Size	1.0" Celestion CDX1-1070	Nominal System Impedance	8 ohm	Power Rating ¹	200W AES, 400W Continuous, 800W Peak	Recommended Amplifier	400-800W @ 8 Ohms	Sensitivity 1W/1m ²	96 dB SPL	Maximum SPL (1m) ³	119 dB SPL, 125 dB SPL (Peak)	Frequency response	52 - 20kHz (-10dB) 63 - 18kHz (-3dB)	Input / Link Connector	Euro Block Connector and M4 Barrier Strip Terminal (7.62mm Pitch)	Horizontal Dispersion Angle	90°	Vertical Dispersion Angle	60°	Crossover Frequency	2.2KHz
Model	TNi-W8PRO																												
System type	8" 2 way Passive Speaker, Bass Reflex																												
Woofer Size	8" HH Designed High Performance Driver, 2.0" Voice Coil																												
Tweeter Size	1.0" Celestion CDX1-1070																												
Nominal System Impedance	8 ohm																												
Power Rating ¹	200W AES, 400W Continuous, 800W Peak																												
Recommended Amplifier	400-800W @ 8 Ohms																												
Sensitivity 1W/1m ²	96 dB SPL																												
Maximum SPL (1m) ³	119 dB SPL, 125 dB SPL (Peak)																												
Frequency response	52 - 20kHz (-10dB) 63 - 18kHz (-3dB)																												
Input / Link Connector	Euro Block Connector and M4 Barrier Strip Terminal (7.62mm Pitch)																												
Horizontal Dispersion Angle	90°																												
Vertical Dispersion Angle	60°																												
Crossover Frequency	2.2KHz																												
Enclosure	<table border="1"> <tr><td>Main Construction Material</td><td>Robust all wood construction (15mm plywood)</td></tr> <tr><td>Finish</td><td>Hard wearing spatter finish (White or Black option)</td></tr> <tr><td>Grille</td><td>Powdercoated steel with acoustic foam backing</td></tr> <tr><td>Mounting Bracket</td><td>4x M8 mounting points for optional HH-BRK30</td></tr> <tr><td>Mounting Suspension Points</td><td>7x M10 Penn-Elcom fly points (3 on top face, 2 on side face, 1 on rear, 1 on bottom)</td></tr> <tr><td>Unit dimensions (HWD)</td><td>474 x 270 x 257mm, 18.7" x 10.6" x 10.1"</td></tr> <tr><td>Unit weight</td><td>9.6Kg, 21.2 lbs</td></tr> <tr><td>Carton dimensions (HWD)</td><td>605 x 370 x 365mm, 23.8" x 14.6" x 14.4", 0.082 M3</td></tr> <tr><td>Packed weight</td><td>11.9Kg, 26.2 lbs</td></tr> <tr><td>EAN Code</td><td>5060109457728 (Black), 5060109457735 (White)</td></tr> </table>	Main Construction Material	Robust all wood construction (15mm plywood)	Finish	Hard wearing spatter finish (White or Black option)	Grille	Powdercoated steel with acoustic foam backing	Mounting Bracket	4x M8 mounting points for optional HH-BRK30	Mounting Suspension Points	7x M10 Penn-Elcom fly points (3 on top face, 2 on side face, 1 on rear, 1 on bottom)	Unit dimensions (HWD)	474 x 270 x 257mm, 18.7" x 10.6" x 10.1"	Unit weight	9.6Kg, 21.2 lbs	Carton dimensions (HWD)	605 x 370 x 365mm, 23.8" x 14.6" x 14.4", 0.082 M3	Packed weight	11.9Kg, 26.2 lbs	EAN Code	5060109457728 (Black), 5060109457735 (White)								
Main Construction Material	Robust all wood construction (15mm plywood)																												
Finish	Hard wearing spatter finish (White or Black option)																												
Grille	Powdercoated steel with acoustic foam backing																												
Mounting Bracket	4x M8 mounting points for optional HH-BRK30																												
Mounting Suspension Points	7x M10 Penn-Elcom fly points (3 on top face, 2 on side face, 1 on rear, 1 on bottom)																												
Unit dimensions (HWD)	474 x 270 x 257mm, 18.7" x 10.6" x 10.1"																												
Unit weight	9.6Kg, 21.2 lbs																												
Carton dimensions (HWD)	605 x 370 x 365mm, 23.8" x 14.6" x 14.4", 0.082 M3																												
Packed weight	11.9Kg, 26.2 lbs																												
EAN Code	5060109457728 (Black), 5060109457735 (White)																												


¹ AES standard Pink Noise 12dB crest factor 2 hours
² Calculated maximum SPL based on rated power handling (4ft)






DIMENSIONS (in mm)


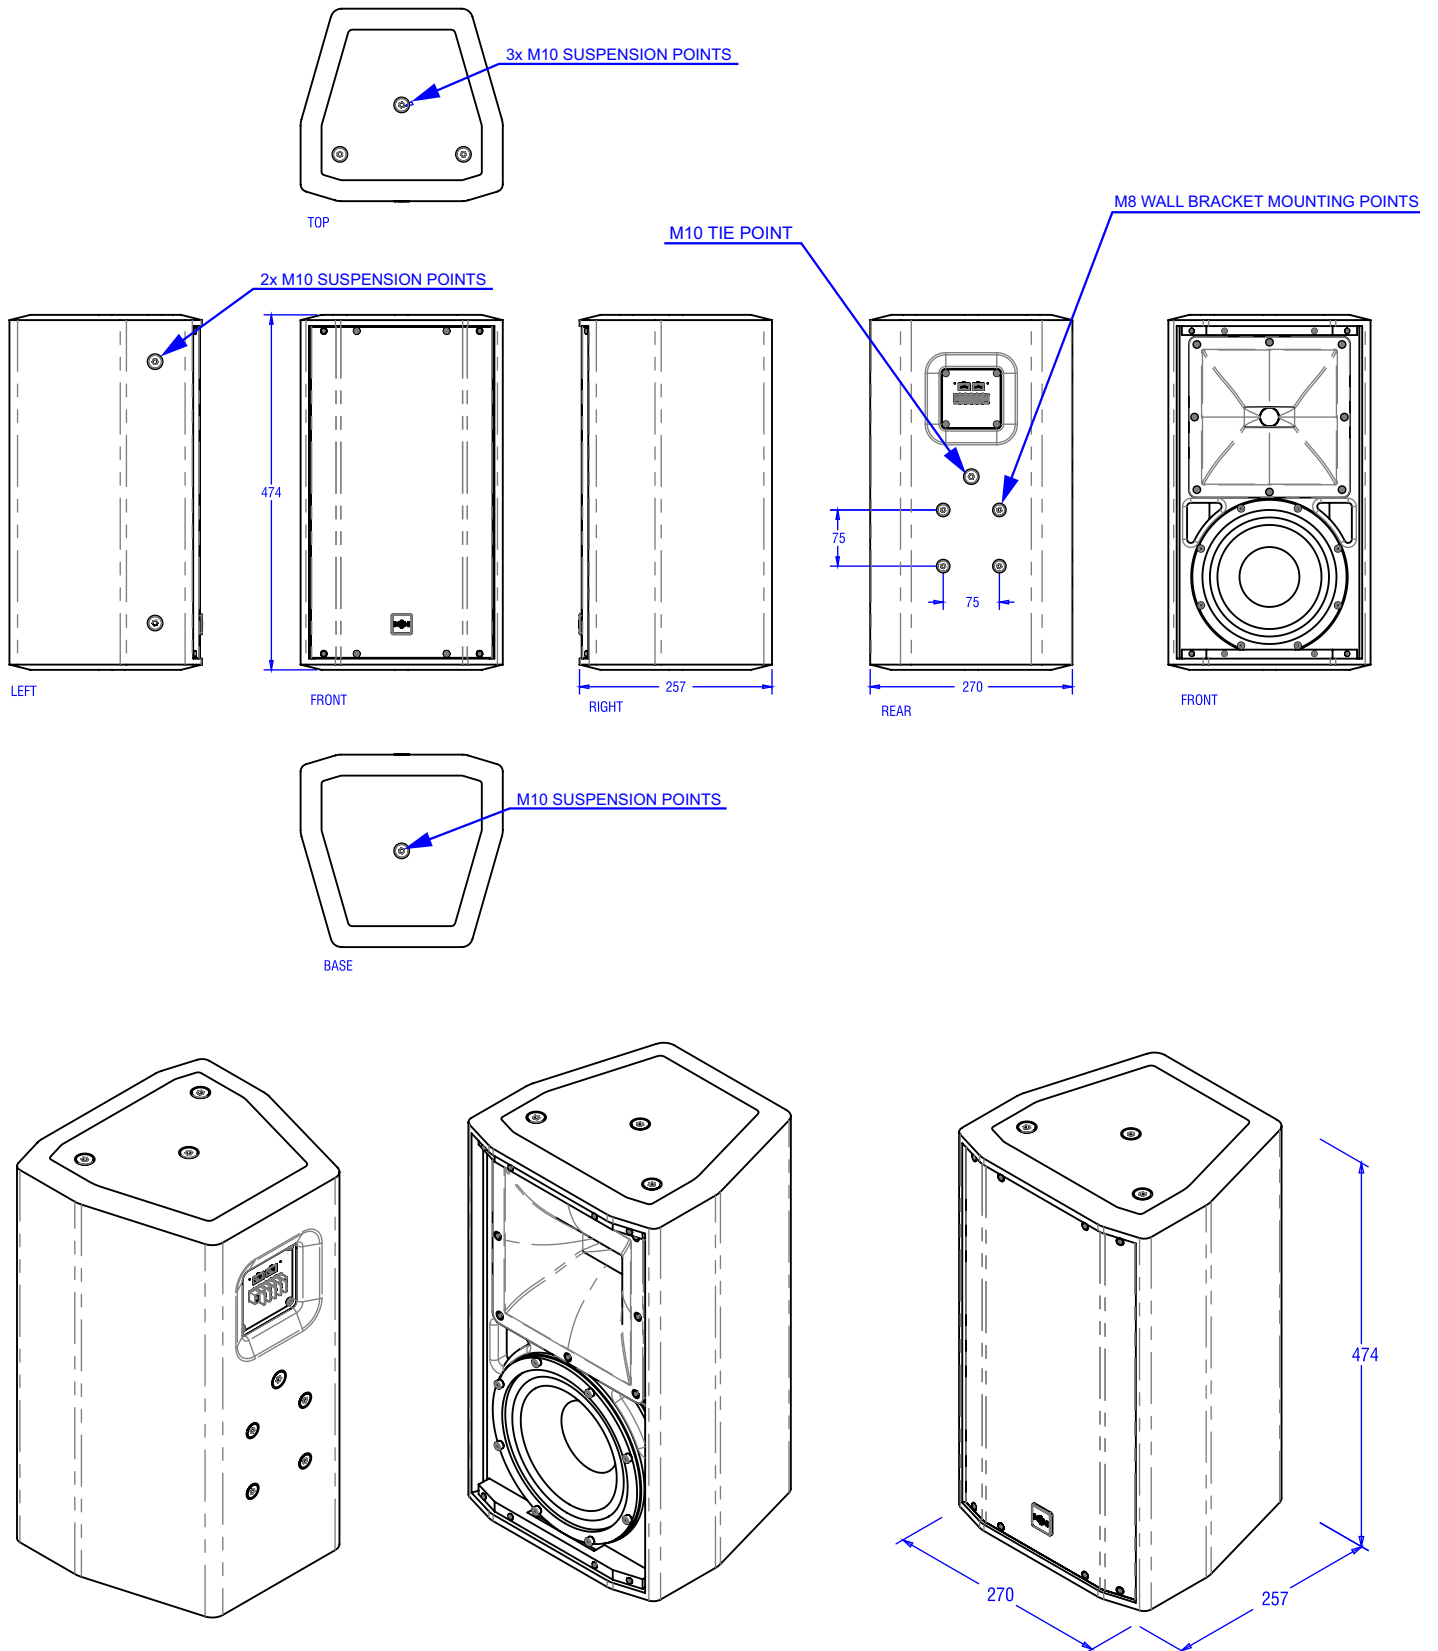





SYSTEM RESPONSE

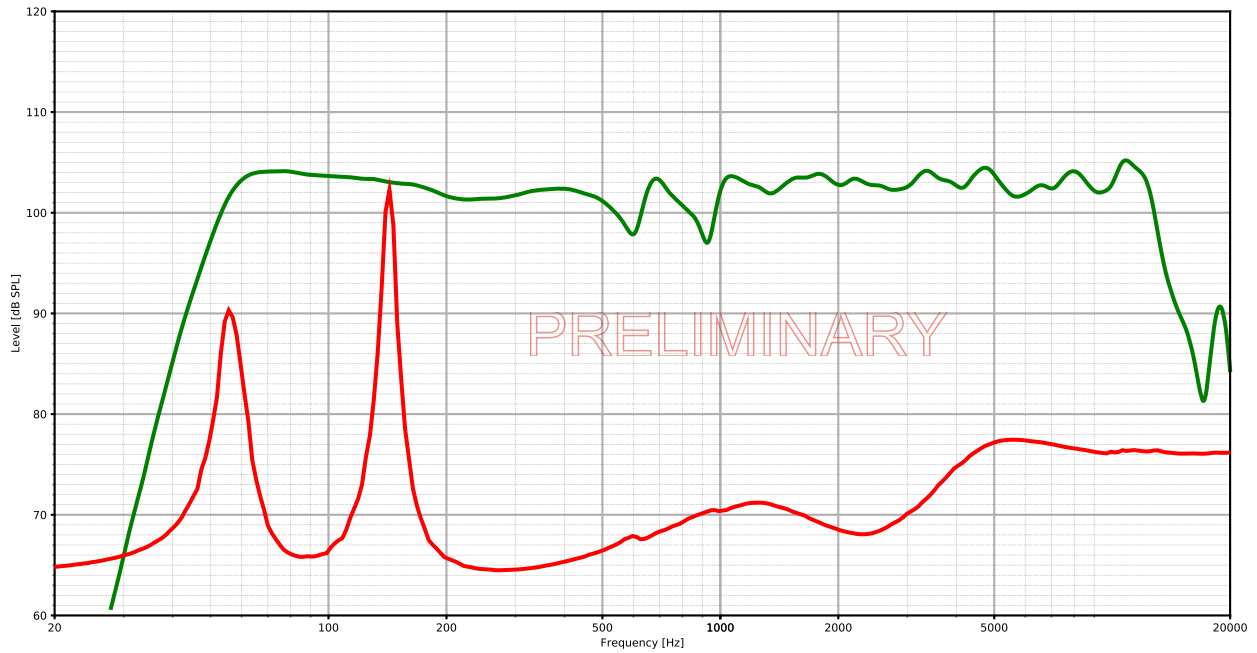


WIRING

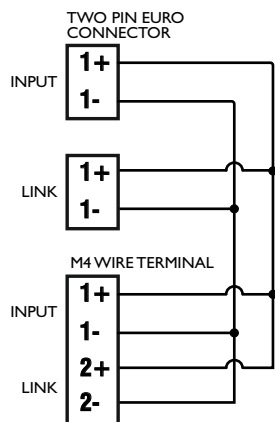
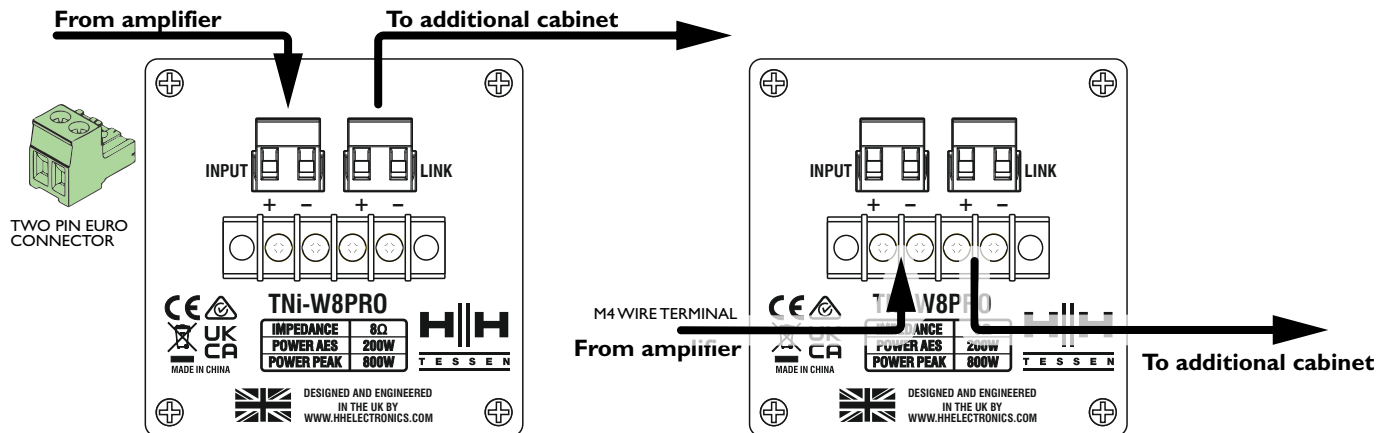




PHASE

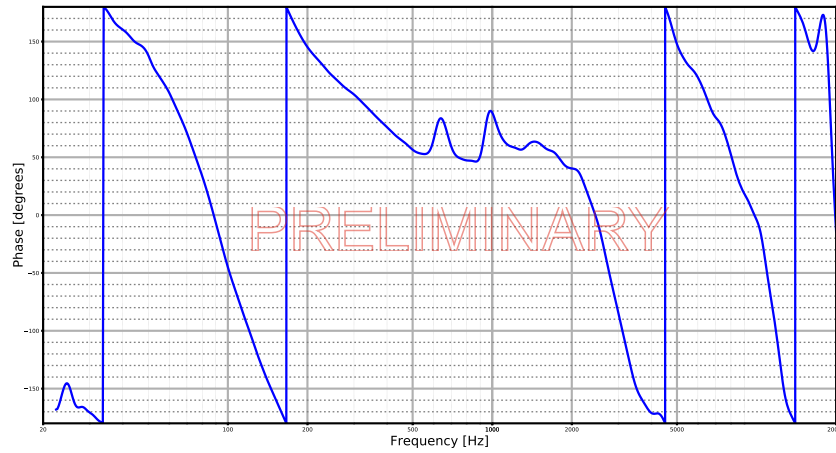


HORIZONTAL & VERTICAL DISPERSION

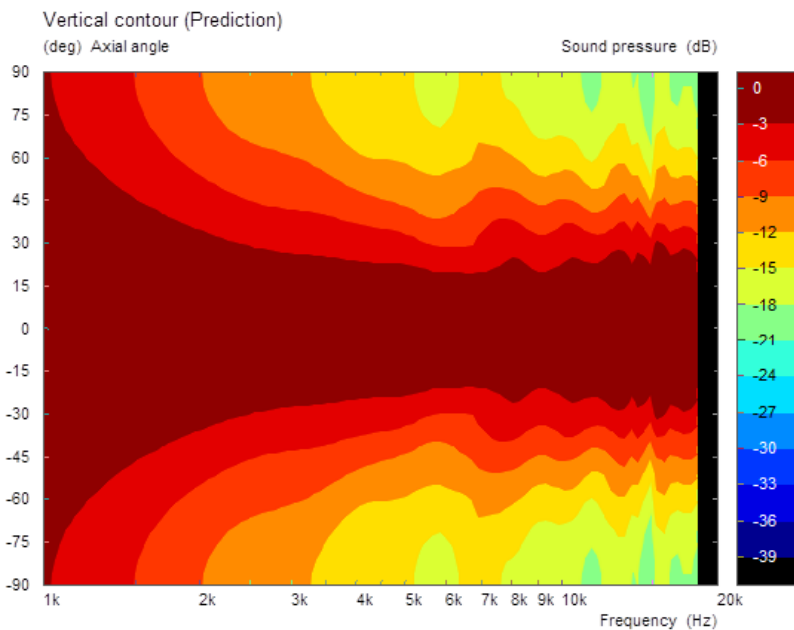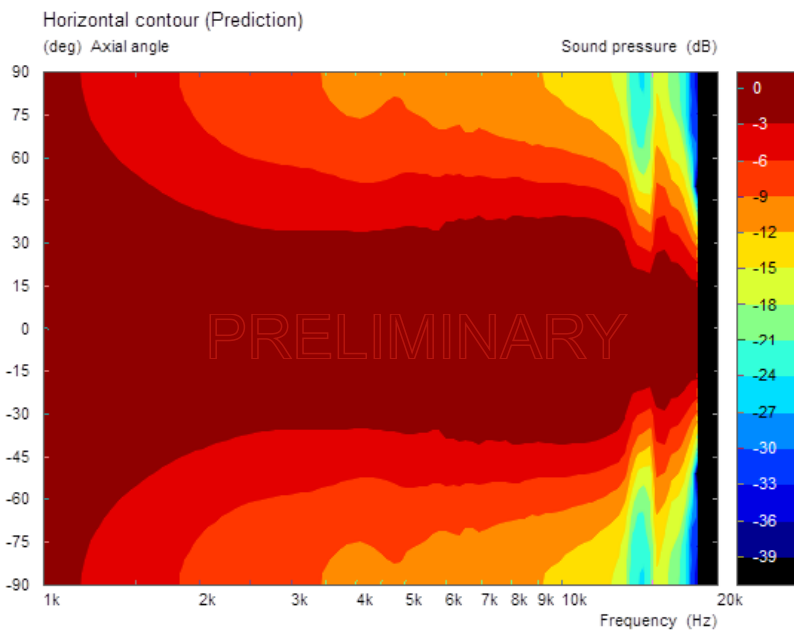


OPTIONAL ACCESSORIES

Description	The HH TNi-BRK30 is a high quality wall bracket for the Tessen PRO installation Range. Designed to offer maximum adjustment and ease of installation. Available in either black or white finishes
Model Code (Black)	TNi-BRK30-B
Model Code (White)	TNi-BRK30-W
Key Features	High Load Capacity
	180 degrees Horizontal Adjustment
	180 degrees Vertical Adjustment
	Locking pin to hold set angle
Material	2.0mm Steel
Rated Weight	30Kg
Unit dimensions (HWD)	160 x 95 x 110mm, 6.3" x 3.7" x 4.3"
Unit weight	0.78Kg, 1.7 lbs
Carton dimensions (HWD)	440 x 195 x 160mm, 17.3" x 7.7" x 6.3" , 0.014 M3
Packed weight	5.5Kg, 12.1 lbs
EAN13	TBC

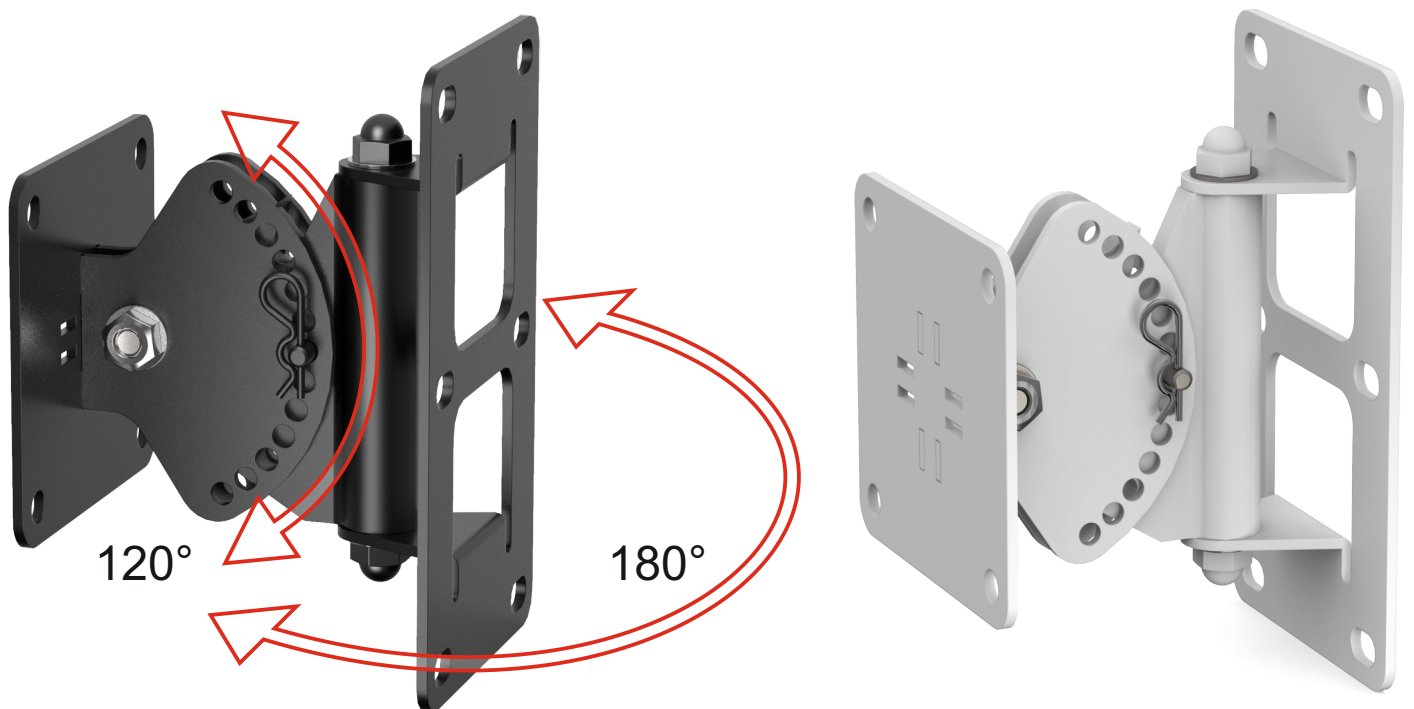

DIMENSIONS (in mm)

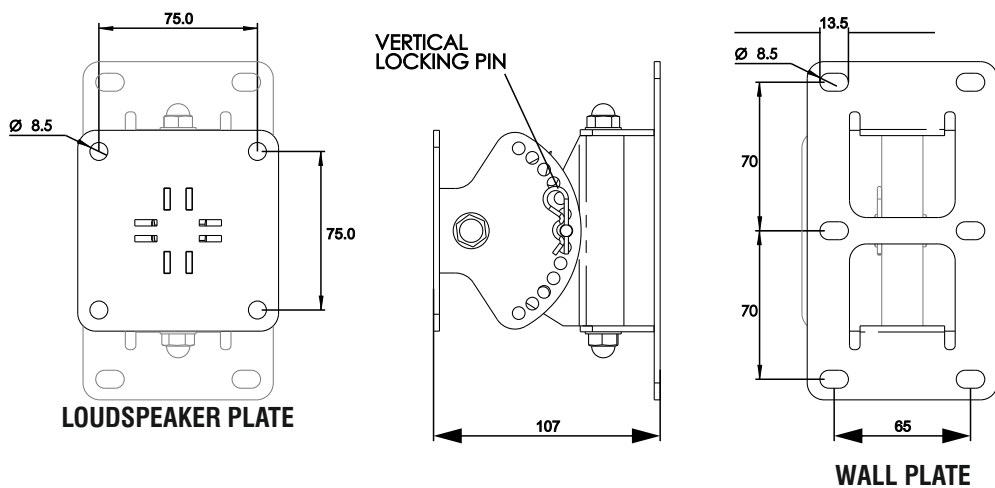

In the interest of continued development, HH reserves the right to amend product specification without prior notification.

