


PA-4040MPX - Pre-Amplifier

482 mm
 19"

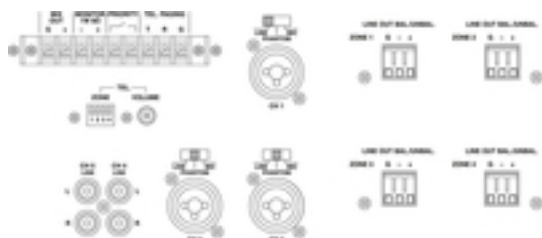

4-zone mixer, for general multi-room PA applications.

- 4 zones with user-defined routing of all input channels
- 3 inputs microphone/line via comb. jacks
- 2 inputs line stereo via RCA jacks
- Each input channel with gain control, 2-way tone control and zone routing switch
- Microphone inputs with +15 V phantom power, to be switched on as required
- Priority function for channel 1, switchable
- Independent paging input, can be routed to each zone
- 4 zone outputs, can be adjusted individually
- Connection for monitor speaker
- Level control via VU meters for zone and monitor
- Adjustable headphone output
- Mains operation or 24 V emergency power operation

Technical Data

Mic/line	: 5 mV/4 k Ohm, 100 mV/10 k Ohm
Line	: 100 mV/30 k Ohm
Telephone paging	: 40 mV/5 k Ohm
Line (zone)	: 1.7 V, bal.
Line (mix out)	: 3.95 V
Monitor speakers	: 8 Ohm/1 W
Frequency range	: 50-17,000 Hz
Bass	: ± 10 dB/100 Hz
Treble	: ± 10 dB/10 kHz
Mic	: > 65 dB
Line	: > 75 dB
THD	: < 1 %
Admiss. ambient temp.	: 0-40 °C
Power supply	: 230 V~/50 Hz/20 VA, 24 V DC current /600 mA
Dimensions	: 482x133x220 mm, 3 RS
Weight	: 4.5 kg