

SPS40TW

Pendant Speaker

User Instructions




Description:

The **SPS40TW 40W Suspended Loudspeaker** is ideal for providing clear, intelligible voice announcements and background music in large, open plan environments such as retail, sports & leisure or warehouse / distribution.

This cost-effective **40 Watt 100v line / low impedance suspended pendant speaker** is finished in white and is supplied with suspension hardware to securely suspend the loudspeaker to the building structure.

The **SPS40TW Pendant Speaker's** internal multi-tap transformer provides a range of settings to allow optimum set up of system level/coverage @100v line as well as providing a low z 8Ω tapping as an option, adjusted via a multi-position rotary switch under the loudspeaker's connectivity cover.

Cable is terminated via phoenix-type screw terminals.

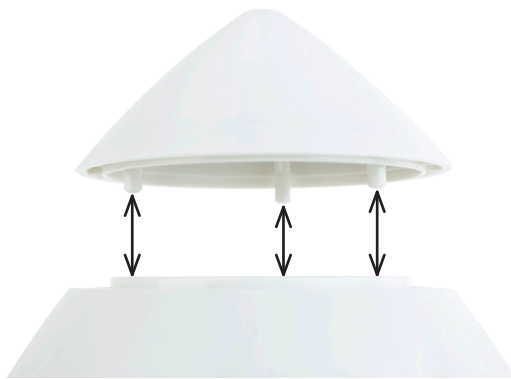


Lift off top cap

Connections:

Selectable power tapping @ 100v / 70v / 8Ω

Note: Wattage setting refers to input voltage from connected amplifier

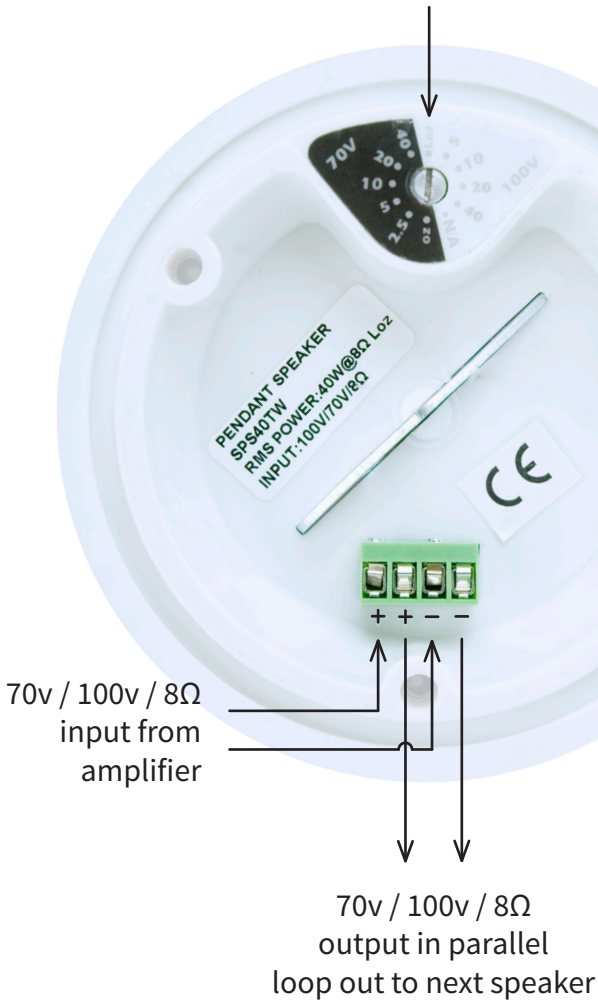

Technical Specifications:



Specifications:

Description	SPS40TW
Frequency Range	60Hz ~ 22kHz
Transformer Options	8Ω and 5, 10, 20, and 40W @100v Line
Speaker Driver Diameter	6.5" PP cone
Sensitivity (1W/1m)	88dB
Colour	White
Material	ABS
Dimensions	252 Ø x 240(D) mm
Weight (Net)	2.58kg
Weight (Gross)	3.03kg

- 40W, 100v Line/8Ω Low Z output
- Power Tappings from 5W ~ 40W
- Phoenix termination
- Secure suspension hardware
- Durable ABS construction
- Finished in white



www.cie-group.com



T: +44 (0)115 9770075 **F:** +44 (0)115 9770081 **E:** info@cie-group.com **W:** www.cie-group.com
CIE-Group 3 Widdowson Close Blenheim Industrial Estate Bulwell Nottingham NG6 8WB UK