




GEMtile

LED PANEL

600mm x 600mm/2ft x 2ft

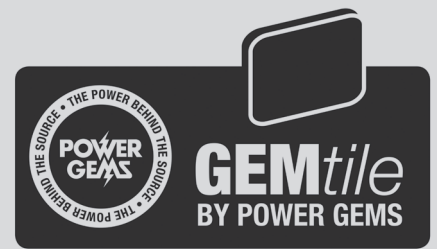

PRODUCT HIGHLIGHTS

THE GEMtile LED CEILING PANEL LIGHT IS THE PERFECT BROADCAST-QUALITY REPLACEMENT FOR 600MM X 600MM SQUARE FLUORESCENT FITTINGS. WITH A SLIM PROFILE AND RECESSED DESIGN, THE GEMtile FITS SEAMLESSLY INTO A STANDARD SUSPENDED CEILING FOR EASY INSTALLATION AND INSTANT START.


With a choice of mounting options, including a standard Kino-type plate, GEMtiles are suitable for a wide range of soft light applications found in film and TV lighting.

The energy-efficient GEMtile works with full control of light on set through wired or wireless DMX. The fixture is fully dimmable down to zero and is 100% flicker-free even when dimmed.

The 70W bi-colour unit provides accurate colour rendering (min CRI 95) and has a colour temperature range of 2700 – 6500K.

MAIN FEATURES

- SUPERIOR COLOUR RENDERING FOR VIBRANT COLOURS AND HEALTHY SKIN TONES
- FLICKER-FREE CONSTANT-CURRENT ON-BOARD CONTROLLER
- FULLY DIMMABLE – NO SHIFT IN COLOUR TEMPERATURE
- DMX/RDM/WIRELESS
- AVAILABLE AS MAINS-POWERED ONLY OR MAINS AND BATTERY AC/DC VERSIONS
- CHOICE OF MOUNTING OPTIONS – VERSIONS SUITABLE FOR USE IN OR OUT OF SHOT
- OUTPERFORMS TRADITIONAL FLUORESCENT

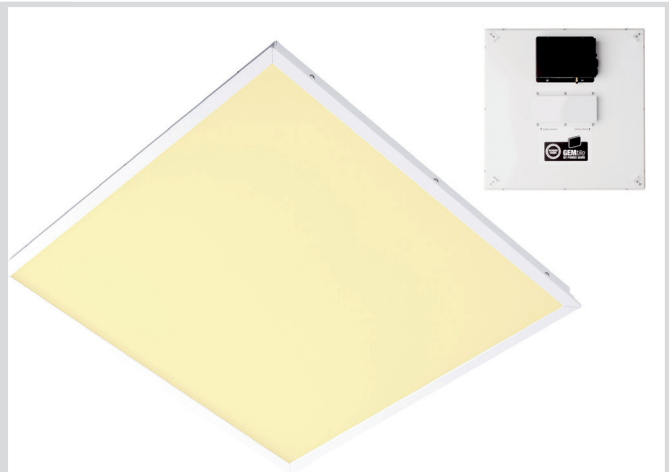

SPECIFICATIONS

Power	70W	Weight	7kg/15.4lb
Input Voltage	95-265V AC	Colour Temperature Range	2700–6500K
Depth	101mm/3.9"	Colour Rendering Index (CRI)	95+
Width	592mm/23.3"		
Length	592mm/23.3"		

CONTACT

POWER GEMS LTD
 Unit 1, Fairhills Trade Centre
 Fairhills Road
 Irlam
 Manchester
 M44 6BA
 United Kingdom
 Tel +44 (0) 161 776 7030

POWER GEMS CORPORATION
 26320 Diamond Pl., Suite 180
 Santa Clarita
 California 91350
 USA
 Tel +1 818 376 1800

www.powergems.com