


SET-UP INSTRUCTIONS

Tru-Fit



Link the Frames

Use the symbols on the frame to link the exterior together.

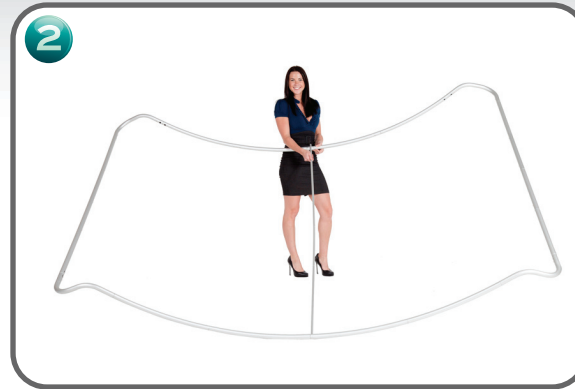

Center Rod

Lay the frame down to attach the center support rod.



Pull Graphic Over

Starting from the top corner, pull the stretch fabric print over the frame.



Secure Graphic

Use the zipper to fasten the graphic to the frame.



Attach the Lights

Fasten both LED lights to the top of the frame.



Ready to Rock!

Your Tru-Fit Stretch Fabric display is now ready!

Disassembling

1. Bend the top of the frame down so that you can remove the lights.
2. Unzip the Stretch Fabric Graphic to loosen it from the frame.
3. Completely remove the graphic.
4. Unhook the frame using the push-pins to release it.

Repacking the Display

1. Fold the stretch graphic neatly to avoid damage.
2. Place the frame pieces back into the case.
3. The lights should be returned to their casing to prevent damage.
4. Secure and fasten the case and wheel away.