



**SOLUTIONS**

# **Temperature Screening Fever Access Control**



**MANUFACTURING**



**FACILITIES MANAGEMENT**




**EDUCATION**



**HOTELS**



**HEALTHCARE**

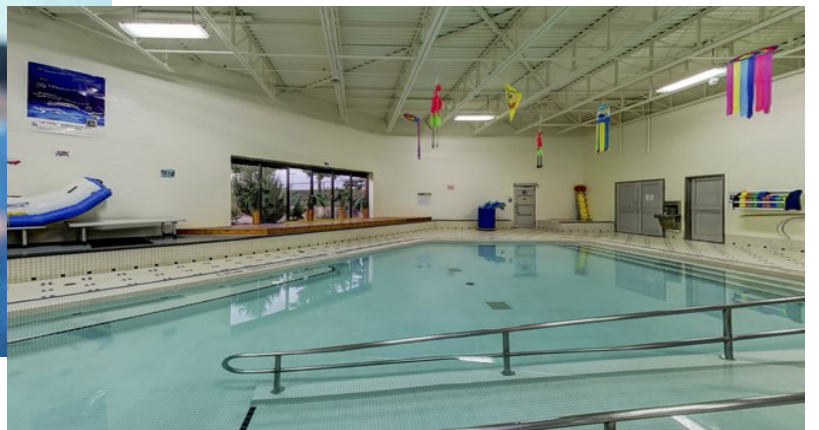

**COMMUNITY CENTRES**



## Fever Screener Access Control

### PRODUCT SPECIFICATION:

#### CAMERA

<b>Pixels</b>	Two mega pixels
<b>Type</b>	Binocular wide dynamic camera
<b>Measurement distance</b>	30-80cm
<b>White balance</b>	Automatic

#### SCREEN

<b>Size</b>	8.0 inch IPS LCD screen
<b>Resolution</b>	800×1280

#### PROCESSOR

<b>CPU</b>	RK3288 Quad core, RAM 2G, main frequency is up to 1.8GHz
<b>Local memory</b>	EMMC 4GB

#### ACCESSORIES

<b>Network Module</b>	Support Ethernet, wireless (WIFI) Audio Support for 2.5w /4R speakers
-----------------------	--

**USB Ports** USB 2.0 x 2

**Serial Communication**

**Interface** RS232 com port x 1

**Relay output** Door opening signal output x 1

**Wigan interface** Wigan 26/34 output x 1

**Wired network interface** RJ45 Ethernet seat x 1

**Power supply** DC12V(±10%)

**Operating temperature** 20°C~40°C

**Power consumption** 13.5W(Max)

**Head Unit Dimensions** 260.18\*132.88\*61.7(mm)

**Height Including Stand** 1480 (mm)

**Weight** 11.9 kg

