

HITLIGHTS® UNIVERSAL POWER SUPPLY

Features



- Constant voltage output
- Variable input voltage, 100-277VAC
 - Compatible with Triac, MLE, ELV, 0-10V & PWM dimmers
 - Flicker-free dimming
 - Cooling by free air convection
 - Full protection metal case
- Auto reset breakers, from short circuit, overloading & over temperature
- Load 10-100%
 - Dry & Wet location
 - 5 year Warranty





CLASS 2
TYPE HL




RoHS
Compliant



Installation Instructions

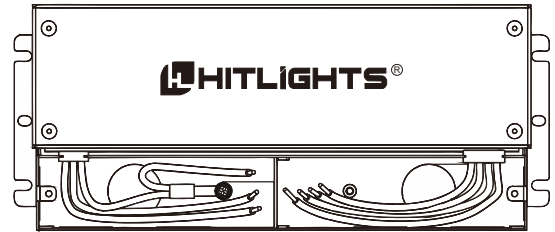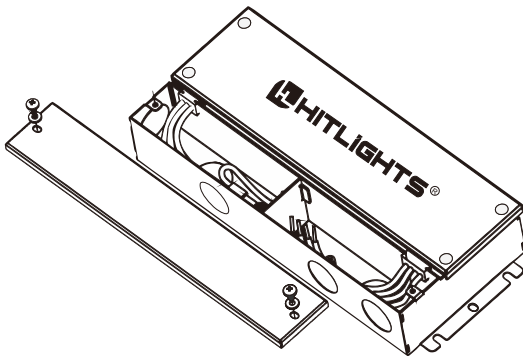

TRIAC dimming

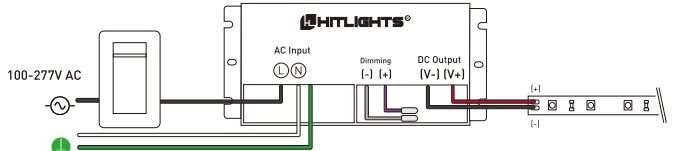

0-10/1-10V dimming

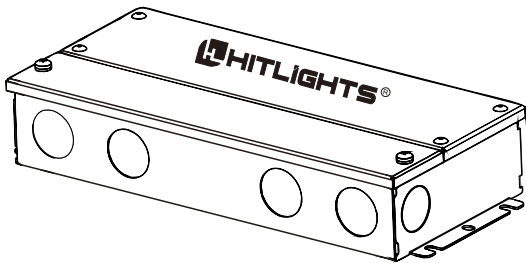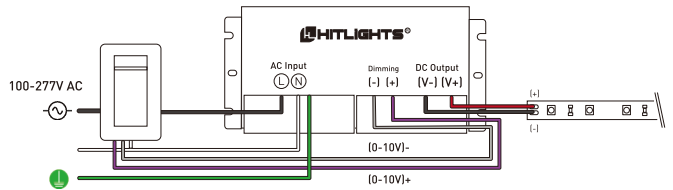

READ BEFORE INSTALLATION RISK OF SHOCK

- If direct wiring to a 120 volt circuit with an ac dimmer **turn off** power at circuit breaker before installing.
- Always connect (+) to positive and (-) to negative. Make sure positive never touches negative while powered.
- Allow ventilation, **do not install** in an airtight compartment. Cooler surrounding air temperatures extend driver life.
- Operate only within temperature range of 4°F (-20°C) to 104°F(40°C).
- Wiring must be in accordance with national & local electrical codes - low-voltage Class 2 circuit.
- Mount the driver **flat to the surface** to provide heat transfer for better cooling.
- It is normal for driver to feel warm to the touch, especially when under a full wattage load.
- For wire runs inside walls, use certified CL2 or **better** cabling and appropriate mounting hardware.
- **Never connect 2 LED drivers** to a single run of LED strips.
- Total wattage of LED fixtures connected to driver must **not exceed wattage rating** of this unit.

If you don't know the wattage rating of your lighting, ask the manufacturer of your lighting.

