




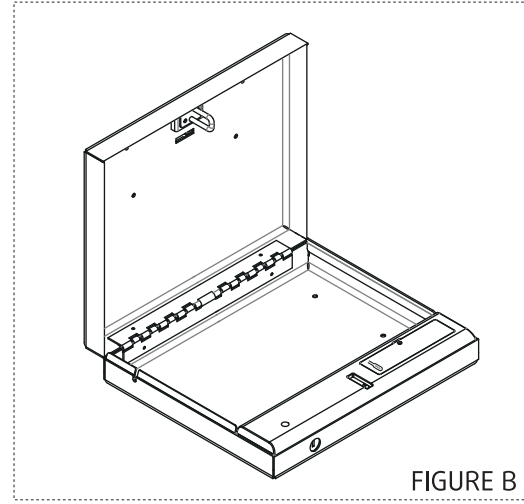

DIGITAL PISTOL SAFE (RP19003)
Instruction Manual

RPNBSafe delivers security exactly where you want it.

Box Contents

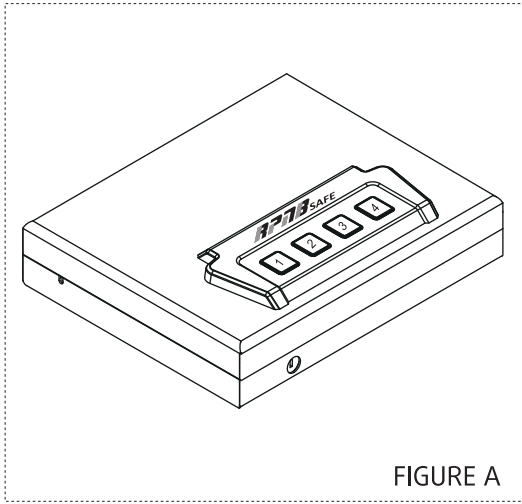

- RPNB® Safe
- High Strength Steel Security Cable
- Screwdriver

- Hardware Mounting Kit
- Owner's Manual/ Quick Start Guide
- Backup Keys (2)

Warnings

To prevent damage to your RPNB® unit or injury to yourself or to others, read the following safety precautions before using this unit.

**DO NOT PLACE OR STORE THE BACKUP KEYS INSIDE THE SAFE AT ANY TIME.
IF THE BATTERY FAILS, YOU WILL BE UNABLE TO OPEN THE SAFE.**

DO NOT expose to extreme heat or cold. Battery power may be affected.

DO NOT store loaded guns in this unit. Firearms are serious in nature and must be handled with respect. Store responsibly.

ALWAYS check to make sure door has latched when closing; Lid requires a firm press and locks automatically.

Disclaimers:

Neither seller nor manufacturer shall be liable for unauthorized access, any injury, loss or damage to personal property direct or consequential, arising out of the use of, or the inability to use the RPNB® Safe.



The user shall determine the suitability of the RPNB® Safe before the intended use and user assumes all risk and liability whatsoever in connection therewith, RPNB® Safe are not intended to protect against environmental hazards including fire and water.

Be sure and follow all local and state firearm laws.

DO NOT operate a firearm without proper training and experience.

Battery Installation

- 1 To get started, insert one of your backup keys into the keyhole at the front of the safe (see Figure C). Push key in and rotate the key 60 degrees counterclockwise to open the safe.
- 2 Locate the battery compartment door on the inside of the safe. Open the battery compartment door by removing the screw with the screwdriver. (Figure D).
- 3 Open the battery cover and insert the 4 AAA alkaline batteries (not included) into the battery compartment. Note that pay attention to the "+" and "-" signs. The "-" end of the batteries go against the spring inside of the compartment.
- 4 When the batteries are inserted correctly you will hear a short beep once and the keypad will light up.
- 5 Once you hear the beep and see the keypad light up, place the battery cover. You are now ready to program your safe.

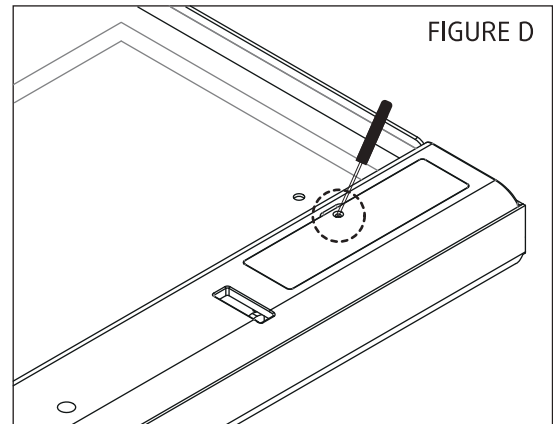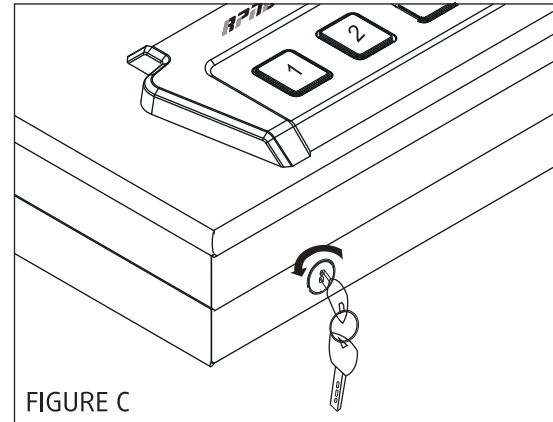

IMPORTANT: Your RPNB® safe will automatically lock when you fully close the lid.

Master Code Programming

First time users should change the default code as soon as possible to prevent unauthorized access to your safe, so it should be kept confidential.


TIP: Code Requirements

- Your code can be a minimum of 4 and a maximum of 6 digits. For your security, the safe will time out and sleep for five minutes if 5 incorrect entries are made. During this time, any key you press will flash red once.
- Two keys cannot be pressed simultaneously.
- Programming a new code will overwrite your previous code.

- 1 Enter default code 1-2-3-4 on the keypad to open your safe.
- 2 Press the "RESET" button (all keys will light up once with the one beep) and hold it (**3 seconds**), then let go, all keys (1-4) will light up once again with the one beep.


TIP: If you make a mistake, all keys will light up red five times with five beeps.

- 3 Enter your NEW master code.
- 4 Press the "RESET" button once (**1 second**) and let go, all keys (1-4) will light up blue twice with double beeps. This tone confirms that the password has been reset.
- 5 Now test the code. If you make a mistake and the new code will not work, simply start over with step 2.

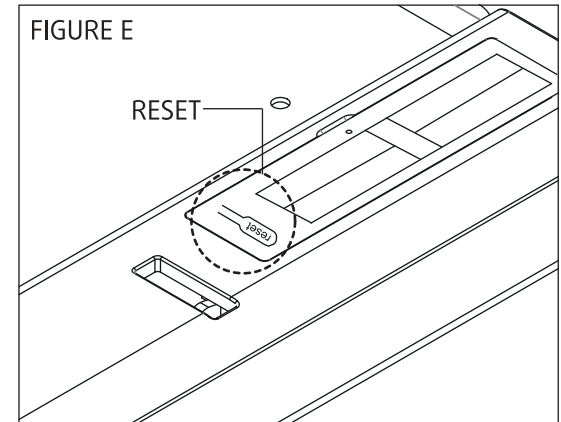

Silence Mode Setting

To silence the audible sound of the electronics, press the "1" button for 3 seconds, all keys (1-4) will light up once and let go. To turn the sound back on repeat the above steps.

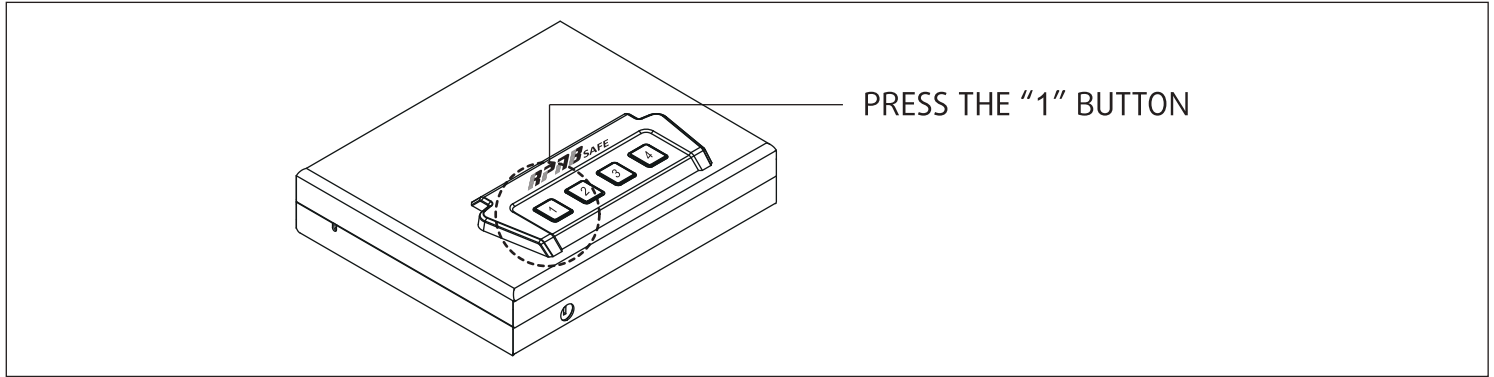

Low Battery Warning

If the indicator light will light up yellow five times with five beeps when opening the safe, your battery level is critically low and your safe needs to be replaced the 4 new batteries.

IMPORTANT


- Use the NEW AAA alkaline battery. Using other batteries may cause unusable conditions.
- When the battery level is low, there will be a problem that the safe cannot be locked. In this situation, simply replace the 4 NEW AAA alkaline batteries and re-enter the password.

Securing Your Safe

Your RPNB® safe can be secured a few different ways. Included is a security cable to attach your safe to larger stationary objects. There are also mounting screws included to mount the safe to a flat surface using the pre-drilled holes on the bottom.

Using the Security Cable

- 1 Loop the security cable around a secured object.
- 2 Run the end of the cable through the eye of the other end and pull tight around the object.
- 3 Place the end of the security cable inside the fully enclosed cable mount inside your RPNB safe as shown in (see Figure F).
- 4 Make sure the safe closes with the cable secured inside the cable mount.

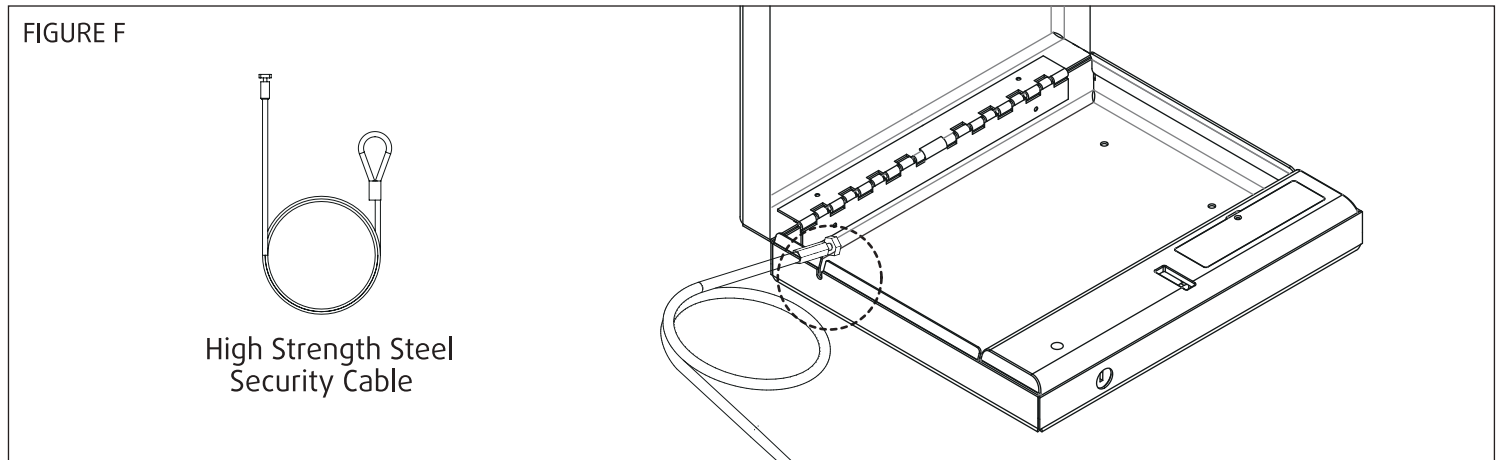

Using the Mounting Screws

TIP: Make sure you have enough clearance for the lid to open properly before mounting the safe.

- 1 Position the safe on a flat surface where you want to mount it.
- 2 Use a pencil to mark the holes for drilling.
- 3 Drill pilot holes.
- 4 Position safe in place and install screws through safe into pilot holes. Tighten screws.

IMPORTANT

Mounting the safe vertically so that the door flips upward will result in incomplete opening of the safe due to weight. The door will open if the safe is mounted vertically so that door opens down or to side.

Customer Support/Warranty

Customer Support

If you have a problem with your RPNB® safe that is not answered in the this manual, we encourage you to email us: CUSTOMERSUPPORT@RPNBSAFE.COM

How shall I view tutorial videos?



RPNB®

<http://www.rpnbsafe.com>

- 1 Go to our website via: www.rpnbsafe.com
- 2 Select the "**Customer Service**" on the navigation bar
- 3 Click "**How To Video**"
- 4 Select the product model you purchased

How shall I replace keys?

- 1 Go to our website via: www.rpnbsafe.com
- 2 Select the "**Customer Service**" on the navigation bar
- 3 Click "**Replace Keys**"
- 4 Fill in the required information

How shall I order accessories?

- 1 Go to our website via: www.rpnbsafe.com
- 2 Select the "**Customer Service**" on the navigation bar
- 3 Click "**Order Accessories**"
- 4 Fill in the required information

 More online at www.rpnbsafe.com under support

Linked Warranty (Terms and Conditions)

RPNB® is committed to building high quality products and will make every effort to ensure our products are free from any defects. We guarantee your safe will be free of defects in materials or workmanship for a period of one year from the date of original. This warranty does not cover abuse, misuse, use in any manner for which is not designed, neglect, modification, damage in advertently caused by the owner; accidents, and/or tampering.

If your safe is determined to be defective and we are responsible for the cause we will have it repaired at our expense, or we will send a new replacement at no cost to you. You will be required to return your existing unit as well as all included accessories to RPNB® prior to replacement of the defective unit along with your order of purchase.

If it is determined your safe needs to be returned our customer support team will provide you with a return detail.

Please have the following information available when contacting us:

- Purchaser's name and mailing address, email address, and phone number
- Online order number
- Detailed description of problem

NEITHER SELLER NOR MANUFACTURER SHALL BE LIABLE FOR ANY INJURY, LOSS OR DAMAGE, DIRECT OR CONSEQUENTIAL, ARISING OUT OF THE USE OF, OR THE INABILITY TO USE THE RPNB® SAFE.

How shall i talk to them?

Go to Your Orders, find your order in list, and click get product support.

You can e-mail the seller by doing the following:

The diagram illustrates the steps to contact seller support through a user interface. It is divided into four numbered sections:

- 1. Go to your account find the order**: Shows a navigation menu with 'Account&Lists', 'Orders', and 'Try'. Under 'Your Account', 'Your Orders' is highlighted with a mouse cursor.
- 2. Find your order item**: Shows the 'Your Orders' page with 'Orders', 'Open Orders', and 'Digital Orders' tabs. A mouse cursor points to the 'Orders' tab. Below, it shows '1 order placed in' followed by a 'past 6 months' filter dropdown.
- 3. Click get product support**: Shows a 'Get product support' button with a mouse cursor, along with 'Write a product review' and 'Archive order' buttons.
- 4. Give the seller 24 hours to respond**: Shows a 'Talk to an expert' section with the text 'Figure out and fix what' s wrong,get' and two buttons: 'phone' and 'chat'. A mouse cursor points to the 'chat' button. Below the buttons, it says 'if a new window doesn' t appear,chan'.

 Please email us to get a special **VIP** discount code before your next order.

 Problem with the order? Please email us, give us a chance to help you firstly.

 **Satisfied with us.**

Hum, this people is nice, i can give them a positive reviews to tell people they are selling good products, doing the right thing.



RPTB[®]

Dear Customer:
Thank for your business
— BEST WISHES FOR YOU —



Customer Support Hours:

Monday - Friday 9:00AM - 6:00PM (PST) Saturday - Sunday 9:00AM - 12:00PM (PST) Excluding Holidays

Hours subject to change

Customer Service Department Contact: customersupport@rpnbsafe.com