

User Manual

Sliding gate motor &
Video control center
(BW-200)

1. App download


Android users:

Scan the QR code below or download the app through this link: <http://smartdoor.net.cn/smart-door/dbridge/site.html>.



Iphone (IOS) users:

Download the app by searching "Smartdoor" on app store.

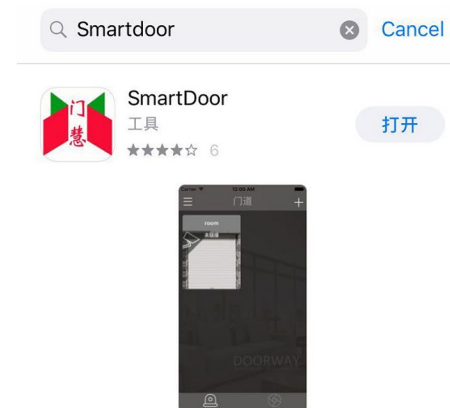

2. Bluetooth Setting


Note: If the sliding gate motor do not have bluetooth function, please ignore this step. And the bluetooth control distance varies with different smart phone.

- ① Power on the bluetooth sliding gate motor
- ② Turn on Bluetooth on your smart phone.

- ③ Open the "Smartdoor" app into home page and press "+" icon.




- ④ There is a CID number start with "BH" and end with "*". Each CID number is unique. Press "+" to set the bluetooth.

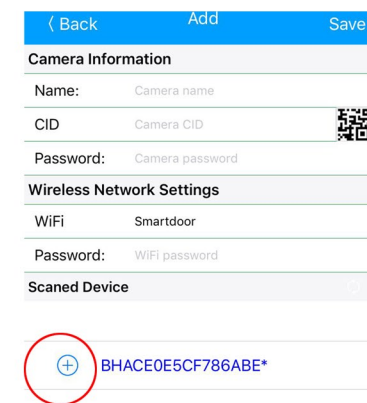

Note:

"BH" means bluetooth device
"*" means the device is the first time to be set or the device is just reset.

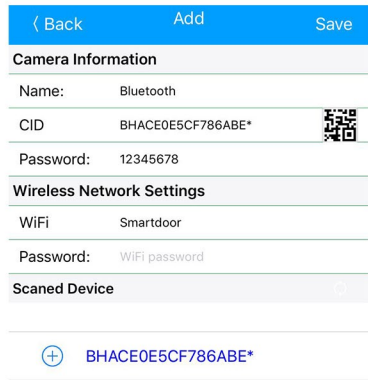


⑤ Input Name and Password then press "Save".


Note: Password must be 8 characters. It is recommended to combine Numbers with letters. Please note the case sensitive.

3. Bluetooth Reset


① Modify bluetooth password, or reset all the bluetooth setting, please press and hold on the BLUE SET button for 4 seconds till the light flashes.

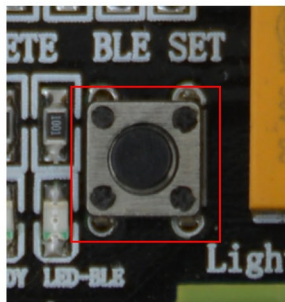

⑥ The app will turn to home page automatically. When the Icon's color turn to blue, that means the bluetooth connection successfully. Press the icon to enter control pad page.

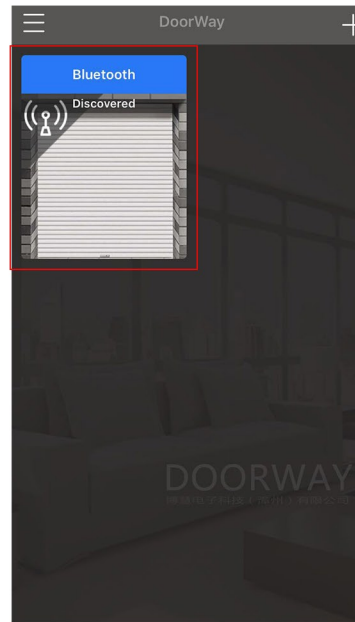


② Press the blue color icon and press "Settings" enter into setting page.

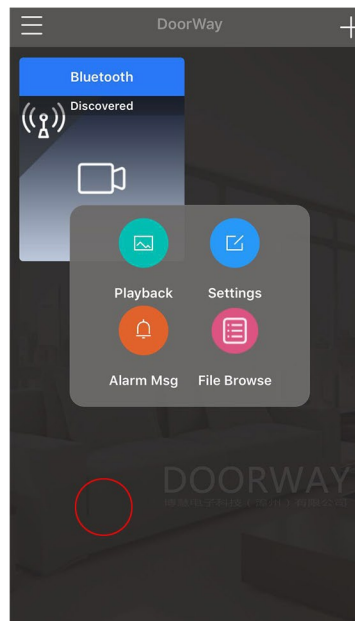

⑦ Control pad: UP (Open), DOWN (-Close), STOP, LOCK.



③ Select "Delete" at the bottom of the "Camera Settings" page then select "OK". Then reset the bluetooth from Step 2.

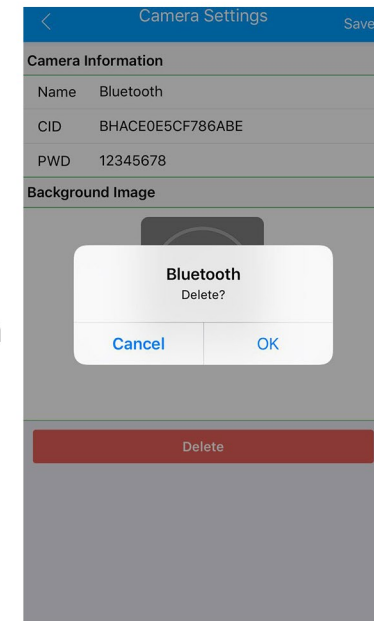


4. Video Control Center Setting


① Power on the video control center

② Use network cable to connect the video control center with router. (If you require wireless connection please ignore this setp)


③ Press and hold the button in the hole for 6 seconds.

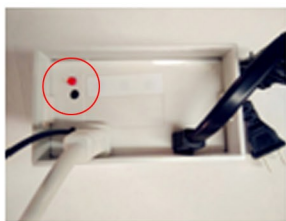


⑥ At the "System Settings" page please enter the "Wireless Setup Camera" page.

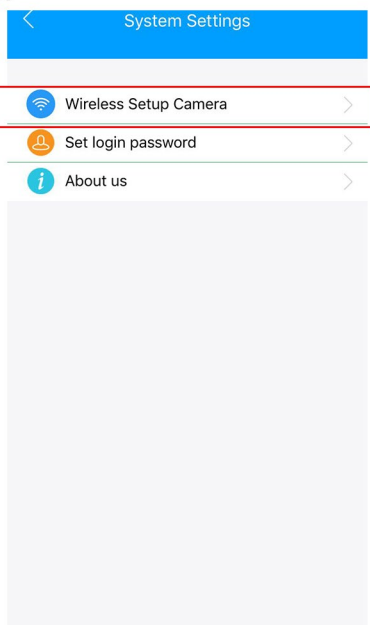


④ Go to the WIFI setting page on your smart phone and search a WIFI name start with "SmartDoor" then connect it.

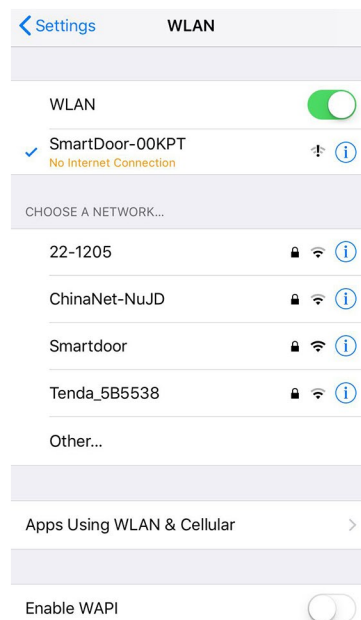


⑤ Open the "Smartdoor" application and press the setting button on the top left corner.

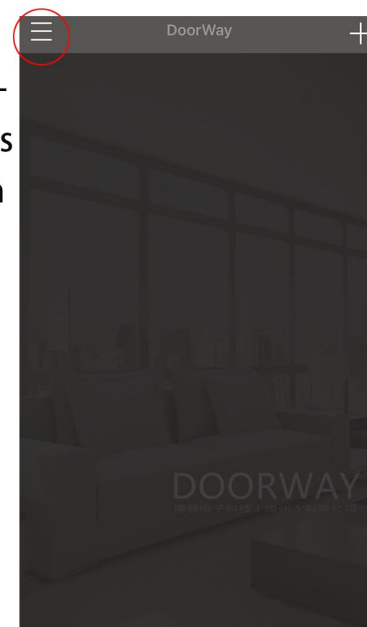


⑧ Press the blue color icon and select "Settings" icon enter into setting page.

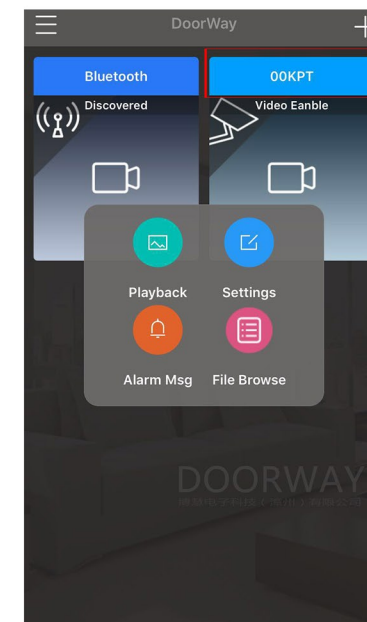


⑦ Set the Cam Pwd and input your local WIFI name and WIFI password then press "Config"

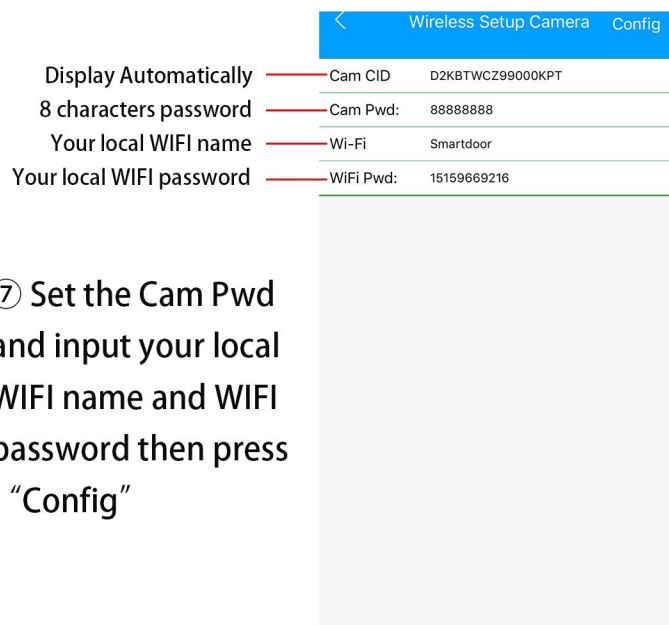

⑨ In the “Camera Settings” page, you can rename the camera. But please don’t change the password here. After you rename the camera, press Save at the top right corner.

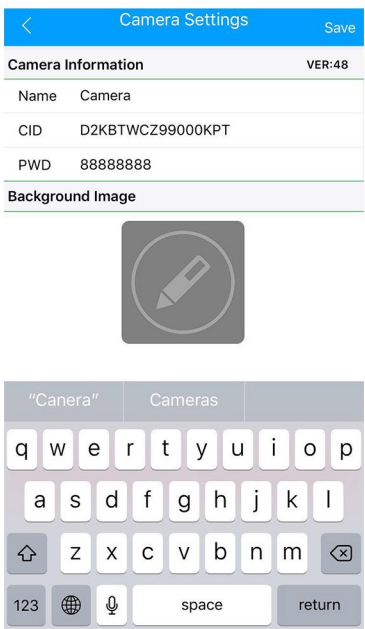


⑩ Go back to home page of the “Smartdoor” application and select the corresponding icon then you can see the camera works.

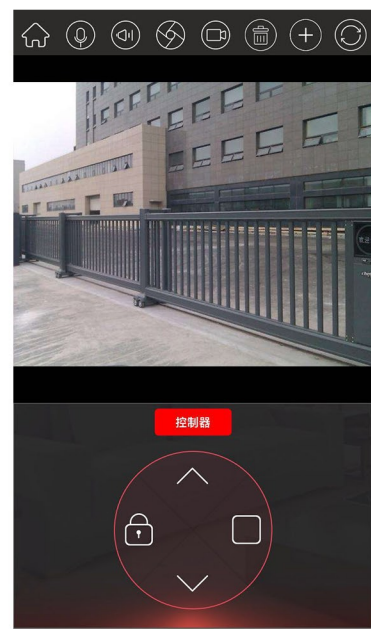


5. Matching the Video control center with sliding gate motor.


① Press the delete button on the top of the page for few times till a “Delete Control **” display on the screen. Then delete it.

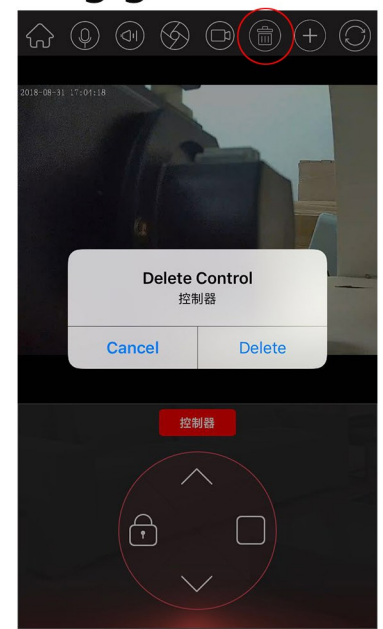

② Press “+” to add controller. Input Name (Any) and save.

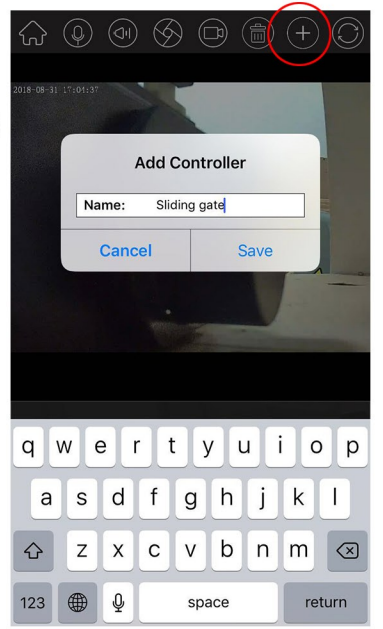

③ Press and hold the “STUYE/DELETE” button for about 4 seconds

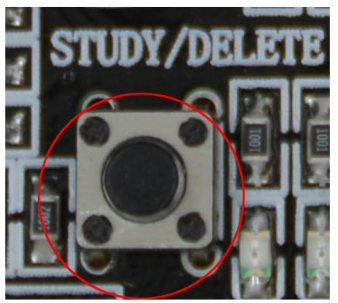

④ Press any key on the control panel to learn from the control board. Then you can remote control the gate motor by your smart phone now.

