


FabriTACK™

FabriTACK™ bonds a thin, high-density fiberglass with a lower density core, significantly improving absorption properties in all frequencies, resulting in enhanced N.R.C values. FabriTACK™ laminate construction includes a 1/8" skin in 14,16 or 18 pcf bonded to 7/8" core 6 pcf. FabriTACK™ is the ONLY high-impact, tackable product that is acoustically tested to C423/E795.

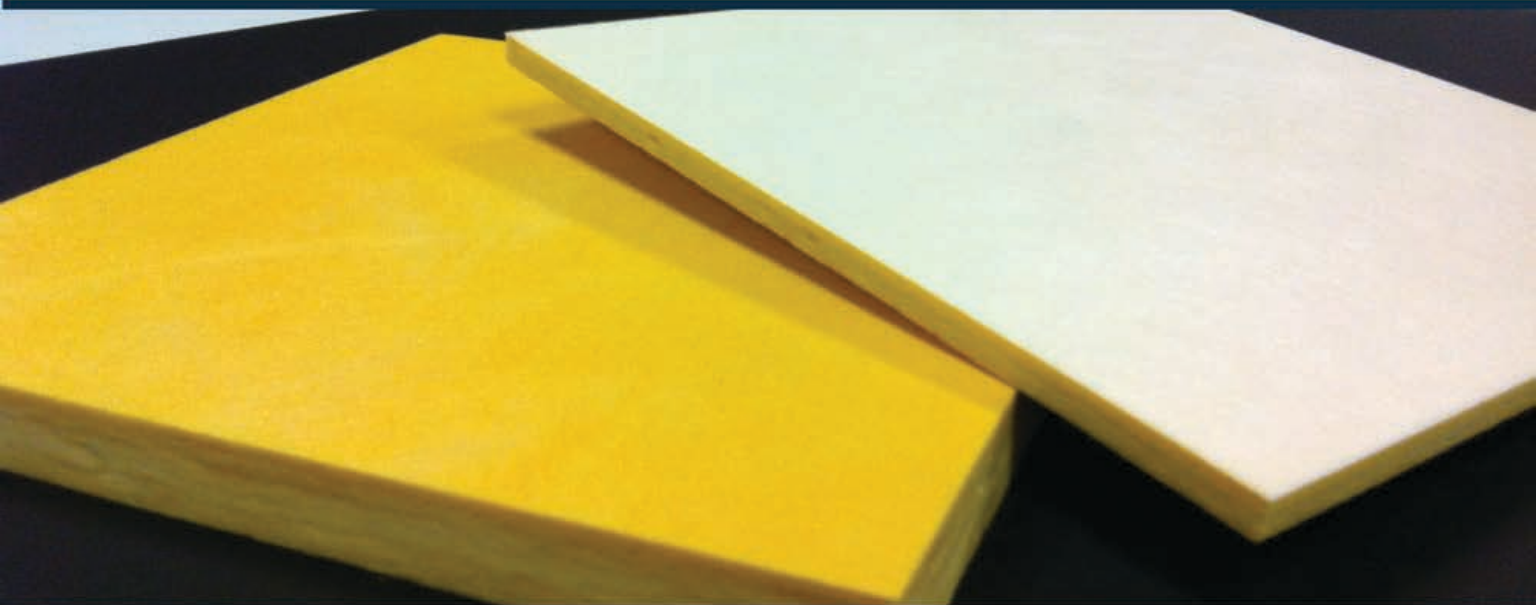

FabriTACK™ Properties and Values

Dimensions	1" Thickness comprised with a 7/8" Core - High-Impact (14#, 16#, 18#) Tackable Skin. Also available in 1/2", 5/8" 3/4" and 1-1/8" Thicknesses
Flame Spread (ASTM E 84)	Class "A" - Flame Spread < 25 - Smoke Development < 50
NRC Rating	ASTM C423 - E795. 1" NRC: .80, SAA .80

* ACOUSTICAL AND FIRE TESTS ARE AVAILABLE AT: WWW.FABRITRAK.COM

* ALL PRODUCTS ARE AVAILABLE WITH WHITE SCRIM FINISH



the visual sound solution

www.fabritrak.com
info@fabritrak.com
+1.609.409.6700