




Once the part is in place it should look like above image. You are now ready to start wrapping your rope around it and clip it to store it neatly.



Front view. Pull the line down around the back side of the base. This is to ensure the line grabs tightly in the cleat of the extension and is held there. Wrap around the backside of the extension as shown in the back view. Go around the front of the extension, up and over the top of the clip mounted in the tack pulley, as shown on the image above.



Simply keep wrapping until there is only just enough line left to pull it into the clip. This clip will then hold the line in place. The line will not be able to slide down over the plastic piece and will stay up and out of your way without having to make any knots. Removing of the rope should also be easy.

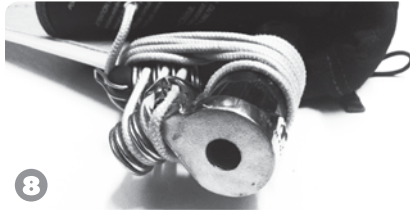

Completed Click-In system view.
After de-rigging the sail, you are able to leave this piece in the sail, and be ready for next time.

RDM EXTENSION "CLICK-IN" SYSTEM USER INSTRUCTION



1 Show of parts: Screw and moulded plastic piece with clip mounted in it.



2 The plastic clip is moulded to fit on the clew side of the triple roller tack pulley with the entry of the clip facing up. The little triangle will fit into the triangular space on the triple roller tack pulley.



3 While the sail is still rolled up push the screw in from the mast side, turn slightly by hand to keep it in there.



4 Place a well fitting Philips head screw driver into the head of the screw and push the plastic part flush to the pulley with the triangle on the plastic engaging into the triangle of the pulley. This will prevent the part from turning when screwing the screw in.



Scan the code to see the instruction video.