

RS CLOSURE SYSTEM



Before starting please ensure that you orientate yourself to the sail as shown in the image above. The rest of the photo's are taken from the users perspective.



TO **OPEN** THE
CLOSURE SYSTEM


Please pull back the tab on the neoprene cover on the sail side of the link, please note that only one side of the link will be exposed, there is no need to fold the whole cover back as you only need to access the spring side of the link. (Folding it all the way back might be handy the first time to understand the system.)

Push the spring to the bottom of the sail to release and open the link by pushing the top flap of the opening towards the mast.

RS CLOSURE SYSTEM



Push the boom through the opening and put on some out haul.

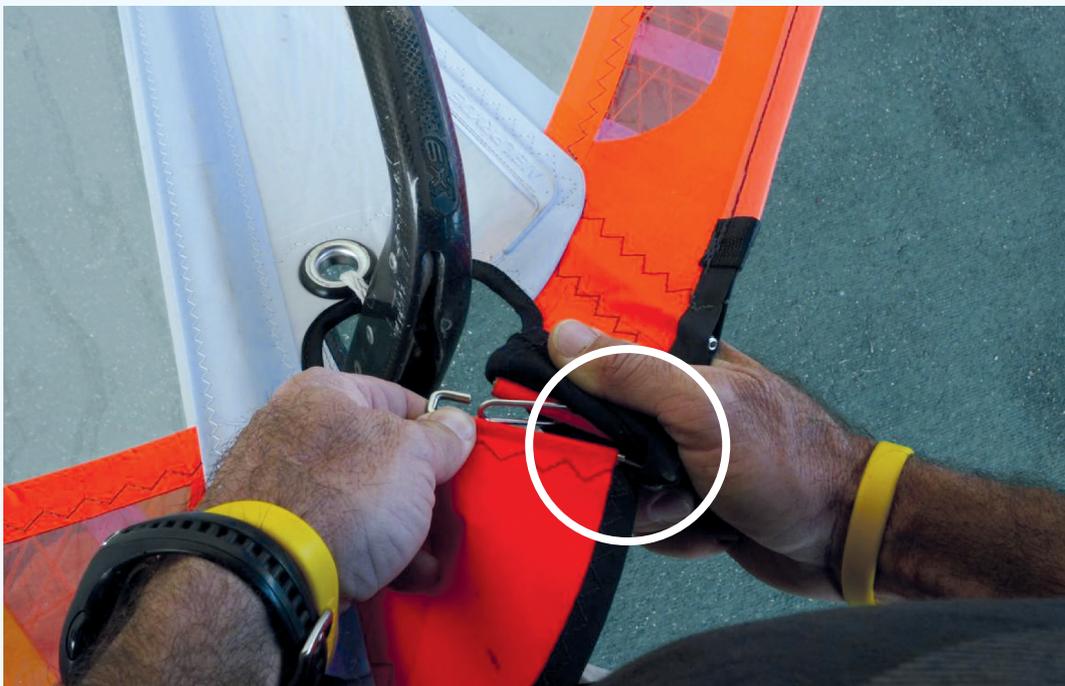


Engage the long end of the link (Pin) into the tube of the other half (leech side is first to engage) as shown on photo above.

RS CLOSURE SYSTEM



Then pivot and push to align the short end (pin) in the tube on the inside of the hole, use your finger on the bottom of the sail (back side) to help align them on the horizontal plain.

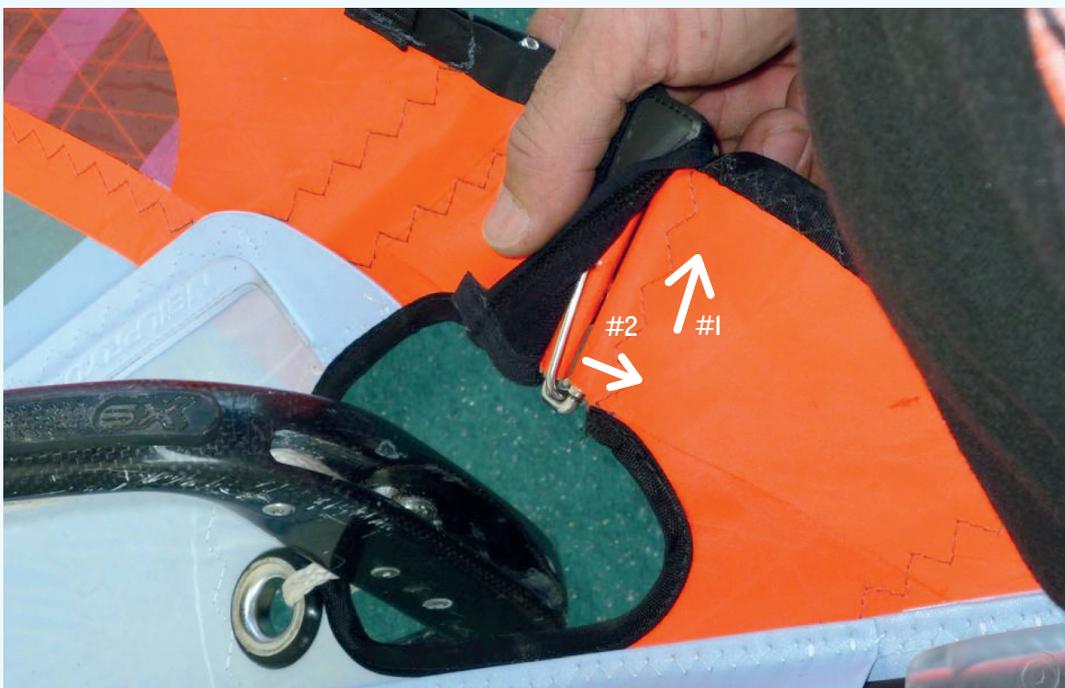

Once aligned push together and make sure the spring engages. With the spring engaged pull the tab on the neoprene cover back over the top of the link and you are ready to finish rigging.