Replacement Guide


Mercedes-Benz W204 X204 Driver & Passenger Interior Door Handle

Tools Required



Power Drill









M10 Socket

Parts Needed





20 Screws



Pin

Step 1: Remove the inside panel from the door.





- O Two T30 Torx screws.
- One T30 Torx screw is located behind the pillar cover.
- Remove the triangular speaker and the cover.
 Pry out the orange clips located near the outside of panel.
- Slide the door lock through the hole.
- Disconnect the cable from the panel's cable holder.

Disconnect the two wire connections.

Tips: Lower the window for an easier access.

Step 2: Remove the wood trims.





O Unbolt Five M10 Caps. Carefully push the two wood trims out.

Step 3: Separate the handle bracket from the door panel.



The handle bracket and the door panel are held together by melted plastic tabs.



- O Use cutting pliers to remove the heads of the melted tabs.
- O Two T10 Torx Screws.



→ Disconnect the LED and lock button wire harness.











Step 4: Remove the handle pivoting pin.






To remove the pin, carefully drive a screw into it. This will allow you to pull it out with your hands. Use the provided new pin for assembly.

Step 5: Assembly



→ Transfer the cable clip onto the new handle.

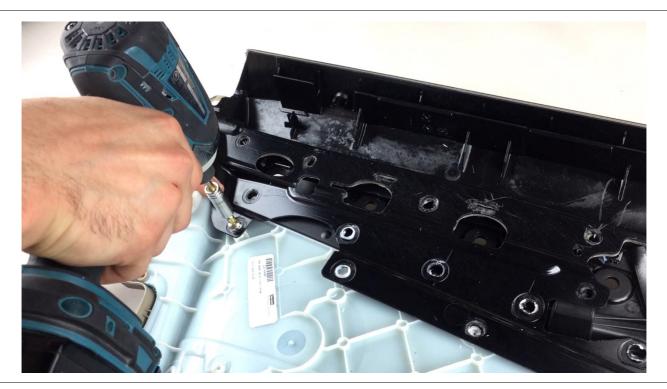



Using the 20 provided screws, fasten the door panel to the handle bracket where the plastic tabs were located.