



Thank you very much for purchasing from M&R. We strive to provide a great product that is made by truck enthusiasts for truck enthusiasts.

RAM 1500 Dual 40in Light Bars

INCLUDED

- (2) 40in Light Bars
- 2 Metal Brackets
- All mounting hardware



Step 1

Remove the plastic inner grill cover by prying the tabs and pulling on the cover from underneath the truck.



Step 2

Remove of illustrated support bolts from each side and replace them with longer bolts provided.




Step 3

Install the brackets onto the threaded bolts just installed and tighten them with supplied nylon locking nuts. This is how they are mounted if you are facing the truck from the front.



Step 4

Once the lightbar mounts are installed, place the lightbars in between the slits on the brackets and tighten them with supplied hardware. You will notice a rail system on the bracket to fit 2 light bars.

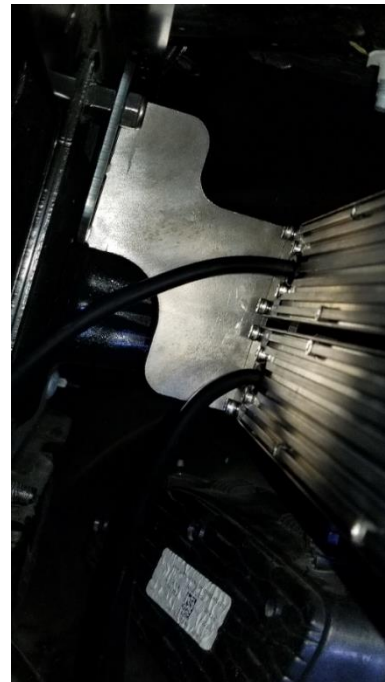

Step 5

Once the lightbars are centered and everything is aligned properly, tighten the bolts on the lightbar ends and the bolt that holds the mounts to the truck.

Step 6

The light bar has 6ft of wiring with a red (positive) and a black negative cable coming out of them. Please purchase a separate wiring harness or make your own in order to power the light bar.

ENJOY YOUR ADVENTURE
&
"FOR OFFROAD USE ONLY"