


Festoon Lighting

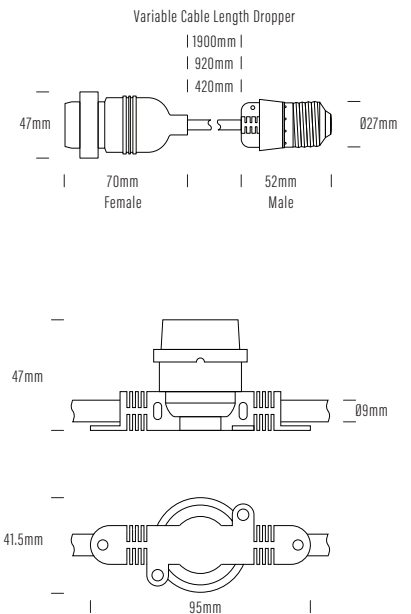

TECHNICAL

PRODUCT CODE	AQF-C-025B
PRODUCT FAMILY	LED Flex & Festoon
MOUNTING	E27 Lamp holders @ 25cm Spacing
CONSTRUCTION	PVC Rubber & Polycarbonate Lens
ELECTRICAL	24V AC or DC
CABLE	Twin Core 1.5mm Square Cable
IP RATING	IP65 with globes installed
WARRANTY	3 Year Aqualux Warranty

Recommended

For run lengths over 3m, it is recommended to use a Cantenary Wire System to support the Festoon run. Cantenary Wire System not included.

Festoon Lighting



24V AC Max cable runs

Max length of cable - 10% voltage drop


Globes	Watts Per Bulb	Lumens Per Bulb	25cm Spacing - 4 Bulbs p/m		50cm Spacing - 2 Bulbs p/m		100cm Spacing - 1 Bulb p/m	
			# Bulbs	Cable length (m)	# Bulbs	Cable length (m)	# Bulbs	Cable length (m)
AQF-G-001-2500K	.5W	48	175	44	120	60	85	84
AQF-G-002-2000K	.5W	39	175	44	120	60	85	84
AQF-G-003-2200K	1.5W	80	115	29	80	40	55	54
AQF-G-003-2700K	1.5W	88	115	29	80	40	55	54
AQF-G-004-2200K	2W	143	95	24	65	32	45	44
AQF-G-004-2700K	2W	149	95	24	65	32	45	44
AQF-G-005-2200K	1.5W	88	100	25	70	35	50	49
AQF-G-005-2700K	1.5W	98	105	26	75	37	50	49

24V DC Max cable runs

Max length of cable - 10% voltage drop

Globes	Watts Per Bulb	Lumens Per Bulb	25cm Spacing - 4 Bulbs p/m		50cm Spacing - 2 Bulbs p/m		100cm Spacing - 1 Bulb p/m	
			# Bulbs	Cable length (m)	# Bulbs	Cable length (m)	# Bulbs	Cable length (m)
AQF-G-001-2500K	.4W	28	225	56	155	77	110	109
AQF-G-002-2000K	.4W	30	210	52	145	72	100	99
AQF-G-003-2200K	.5W	35	180	45	125	62	90	89
AQF-G-003-2700K	.5W	39	180	45	125	62	90	89
AQF-G-004-2200K	.7W	62	150	37	105	52	75	74
AQF-G-004-2700K	.7W	64	165	41	115	57	80	79
AQF-G-005-2200K	.6W	37	165	41	115	57	80	79
AQF-G-005-2700K	.6W	42	165	41	115	57	80	79

Festoon Lighting

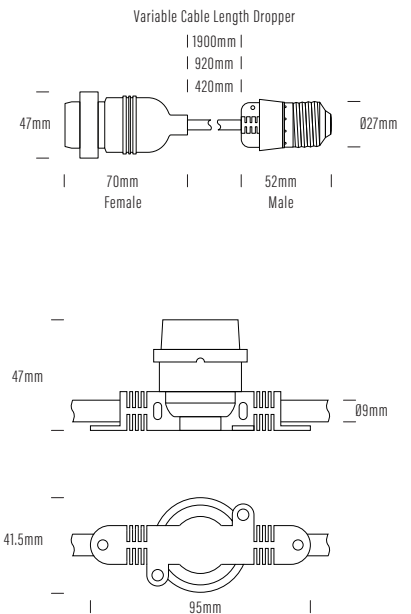

TECHNICAL

PRODUCT CODE	AQF-C-050B
PRODUCT FAMILY	LED Flex & Festoon
MOUNTING	E27 Lamp holders @ 50cm Spacing
CONSTRUCTION	PVC Rubber & Polycarbonate Lens
ELECTRICAL	24V AC or DC
CABLE	Twin Core 1.5mm Square Cable
IP RATING	IP65 with globes installed
WARRANTY	3 Year Aqualux Warranty

Recommended

For run lengths over 3m, it is recommended to use a Cantenary Wire System to support the Festoon run. Cantenary Wire System not included.

Festoon Lighting



24V AC Max cable runs

Max length of cable - 10% voltage drop


Globes	Watts Per Bulb	Lumens Per Bulb	25cm Spacing - 4 Bulbs p/m		50cm Spacing - 2 Bulbs p/m		100cm Spacing - 1 Bulb p/m	
			# Bulbs	Cable length (m)	# Bulbs	Cable length (m)	# Bulbs	Cable length (m)
AQF-G-001-2500K	.5W	48	175	44	120	60	85	84
AQF-G-002-2000K	.5W	39	175	44	120	60	85	84
AQF-G-003-2200K	1.5W	80	115	29	80	40	55	54
AQF-G-003-2700K	1.5W	88	115	29	80	40	55	54
AQF-G-004-2200K	2W	143	95	24	65	32	45	44
AQF-G-004-2700K	2W	149	95	24	65	32	45	44
AQF-G-005-2200K	1.5W	88	100	25	70	35	50	49
AQF-G-005-2700K	1.5W	98	105	26	75	37	50	49

24V DC Max cable runs

Max length of cable - 10% voltage drop

Globes	Watts Per Bulb	Lumens Per Bulb	25cm Spacing - 4 Bulbs p/m		50cm Spacing - 2 Bulbs p/m		100cm Spacing - 1 Bulb p/m	
			# Bulbs	Cable length (m)	# Bulbs	Cable length (m)	# Bulbs	Cable length (m)
AQF-G-001-2500K	.4W	28	225	56	155	77	110	109
AQF-G-002-2000K	.4W	30	210	52	145	72	100	99
AQF-G-003-2200K	.5W	35	180	45	125	62	90	89
AQF-G-003-2700K	.5W	39	180	45	125	62	90	89
AQF-G-004-2200K	.7W	62	150	37	105	52	75	74
AQF-G-004-2700K	.7W	64	165	41	115	57	80	79
AQF-G-005-2200K	.6W	37	165	41	115	57	80	79
AQF-G-005-2700K	.6W	42	165	41	115	57	80	79

Festoon Lighting

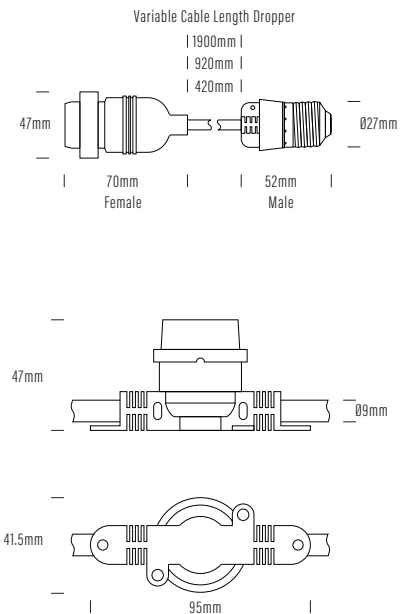

TECHNICAL

PRODUCT CODE	AQF-C-100B
PRODUCT FAMILY	LED Flex & Festoon
MOUNTING	E27 Lamp holders @ 100cm Spacing
CONSTRUCTION	PVC Rubber & Polycarbonate Lens
ELECTRICAL	24V AC or DC
CABLE	Twin Core 1.5mm Square Cable
IP RATING	IP65 with globes installed
WARRANTY	3 Year Aqualux Warranty

Recommended

For run lengths over 3m, it is recommended to use a Cantenary Wire System to support the Festoon run. Cantenary Wire System not included.

Festoon Lighting



24V AC Max cable runs

Max length of cable - 10% voltage drop

Globes	Watts Per Bulb	Lumens Per Bulb	25cm Spacing - 4 Bulbs p/m		50cm Spacing - 2 Bulbs p/m		100cm Spacing - 1 Bulb p/m	
			# Bulbs	Cable length (m)	# Bulbs	Cable length (m)	# Bulbs	Cable length (m)
AQF-G-001-2500K	.5W	48	175	44	120	60	85	84
AQF-G-002-2000K	.5W	39	175	44	120	60	85	84
AQF-G-003-2200K	1.5W	80	115	29	80	40	55	54
AQF-G-003-2700K	1.5W	88	115	29	80	40	55	54
AQF-G-004-2200K	2W	143	95	24	65	32	45	44
AQF-G-004-2700K	2W	149	95	24	65	32	45	44
AQF-G-005-2200K	1.5W	88	100	25	70	35	50	49
AQF-G-005-2700K	1.5W	98	105	26	75	37	50	49

24V DC Max cable runs

Max length of cable - 10% voltage drop

Globes	Watts Per Bulb	Lumens Per Bulb	25cm Spacing - 4 Bulbs p/m		50cm Spacing - 2 Bulbs p/m		100cm Spacing - 1 Bulb p/m	
			# Bulbs	Cable length (m)	# Bulbs	Cable length (m)	# Bulbs	Cable length (m)
AQF-G-001-2500K	.4W	28	225	56	155	77	110	109
AQF-G-002-2000K	.4W	30	210	52	145	72	100	99
AQF-G-003-2200K	.5W	35	180	45	125	62	90	89
AQF-G-003-2700K	.5W	39	180	45	125	62	90	89
AQF-G-004-2200K	.7W	62	150	37	105	52	75	74
AQF-G-004-2700K	.7W	64	165	41	115	57	80	79
AQF-G-005-2200K	.6W	37	165	41	115	57	80	79
AQF-G-005-2700K	.6W	42	165	41	115	57	80	79