




SMART WiFi GU10 BIORHYTHM GLOBES

Biorhythm to simulate natural daylight

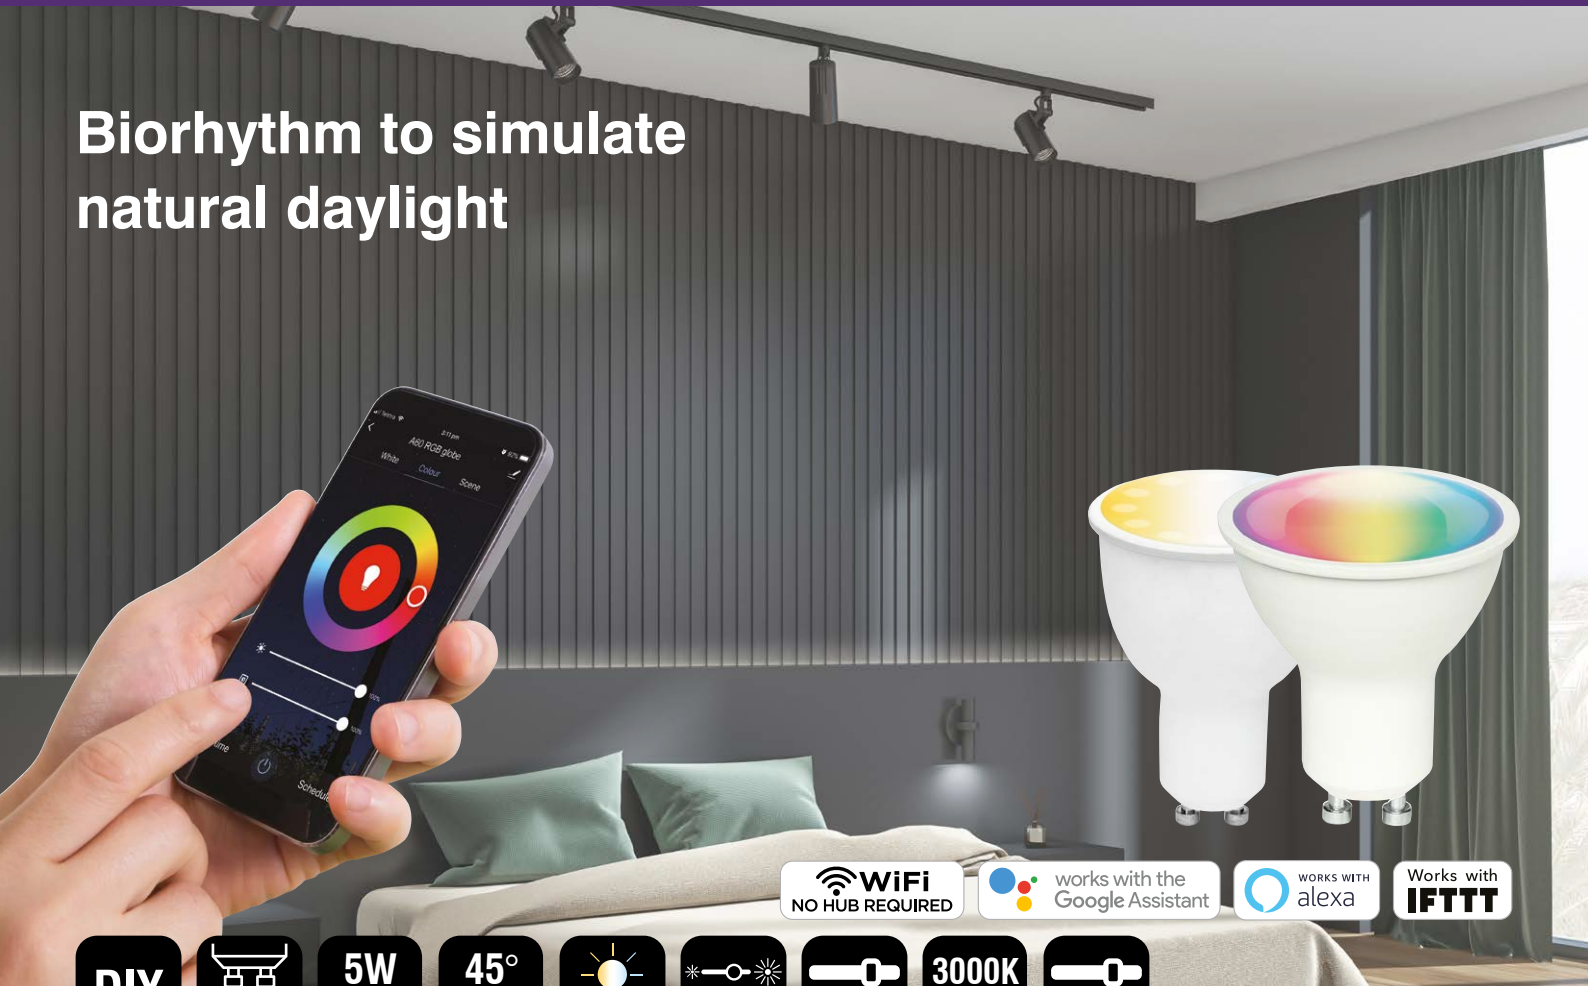

WiFi
NO HUB REQUIRED

works with the
Google Assistant

WORKS WITH
alexa

Works with
IFTTT

DIY

GU10 BASE

5W
350LM

45°
BEAM SPREAD

BIORHYTHM

DIMMING

TUNEABLE CCT

3000K
WARM WHITE

TUNEABLE RGB

← 22081 →

← 21960 →

Make your lamps, spotlights and exterior lighting smart with these GU10 globes. Use Biorhythm to help you focus (or relax) throughout your day. It simulates the natural progression of light through the day to benefit your sleep-wake cycle.

- Biorhythm gradually increases brightness and colour temperature to promote wakefulness and focus during the day before decreasing them to feel more relaxed and ready to sleep at night.
- Control from anywhere via app or voice control.
- Create schedules & timing to automate your home.
- Tune the colour temperature from a warm 2700K to a bright daylight 6000K (CCT model)
- Design different colour scenes and brightness so you can easily change its colour or luminosity to suit your mood. (RGB+W model)
- Provides a 45 degree beam with up to 400 lumens of clear, crisp light from a 5W LED light source.
- Fits in most GU10 fittings to make your existing lighting smart.
- Dimmable via app and/or voice control through Amazon Alexa®, Google Assistant®.
- Compatible with BrilliantSmart devices via automation & IFTTT.

APPLICATIONS

- Biorhythm lighting feature simulates daylight from sunrise to sunset.
- Control lights individually and in groups.
- Using “vacation routines” to turn lights on and off at random intervals to make it seem like you’re home when you’re away






SMART WiFi GU10 BIORHYTHM GLOBES

TECHNICAL SPECIFICATIONS

Operating voltage:	220-240V / 50Hz
Wattage:	5W Total
Lumens:	400 Total Lumens
Light adjustable:	Biorythm to simulate daylight from sunrise to sunset 22081: Tune colour temperature within 2700K and 6000K 21960: Millions of colours and 3000K warm white
Beam angle:	45 degrees
Colour rendering index:	> 80
Dimmable:	Yes, via app
Construction:	Polycarbonate, frosted acrylic
Operating temperature:	+5°C to 40°C
WiFi Info:	IEEE802.11b/g/n, 2.4GHz Mac Encryption; WEP/WAPI/TKIP/AES
Device Requirements:	iOS 8.0 or higher, Android 4.1 or higher
Standards:	AS/NZS 62560:2011+A1:2015

INSTALLATION

Do-it-Yourself installation



	MODEL	BASE	DESCRIPTION	BOX SIZE	GROSS WEIGHT	BOX QTY	BARCODE/TUN
RETAIL BOX	22081	GU10		W65 x H125 x D60 mm	0.05 kg	1 pc	 9 312641 220817 >
INNER CTN	22081	GU10	Smart Wifi GU10 CCT LED Biorythm Globe	W490 x H270 x D430 mm	0.34 kg	6 pc	 19312641220814
OUTER CTN	22081	GU10		W625 x H230 x D305 mm	3.95 kg	60 pc	 29312641220811
RETAIL BOX	21960	GU10		W65 x H125 x D60 mm	0.05 kg	1 pc	 9 312641 219606 >
INNER CTN	21960	GU10	Smart Wifi GU10 RGB+W LED Biorythm Globe	W490 x H270 x D430 mm	0.34 kg	6 pc	 19312641219603
OUTER CTN	21960	GU10		W625 x H230 x D305 mm	3.95 kg	60 pc	 29312641219600