

HATHOR SERIES

LED Exterior Wall & Bollard Lights


- Input voltage: 100-240V AC 50/60Hz
- Inbuilt constant current driver included
- Driver output voltage: 18-42V
- Driver input current: 0.065A
- Driver output current: 300mA
- Housing & heatsink: powder coated-aluminium
- Diffuser: PC
- HATHOR1 back plate: PC
- HATHOR2 & 3 surface mounting plate: die cast aluminium
(not for use inground)
- Power factor: >0.5
- Ambient Temp: -20 to +50°C (The life of the lamp will gradually reduce if used outside these temperature parameters)
- Not suitable for use with dimmers
- Suitable for 2-way switching
- Suitable for use with PIR or Microwave sensors

30,000hr
Lifetime

120°
Beam Angle

IP54
Rated

3YEAR
Replacement
Warranty

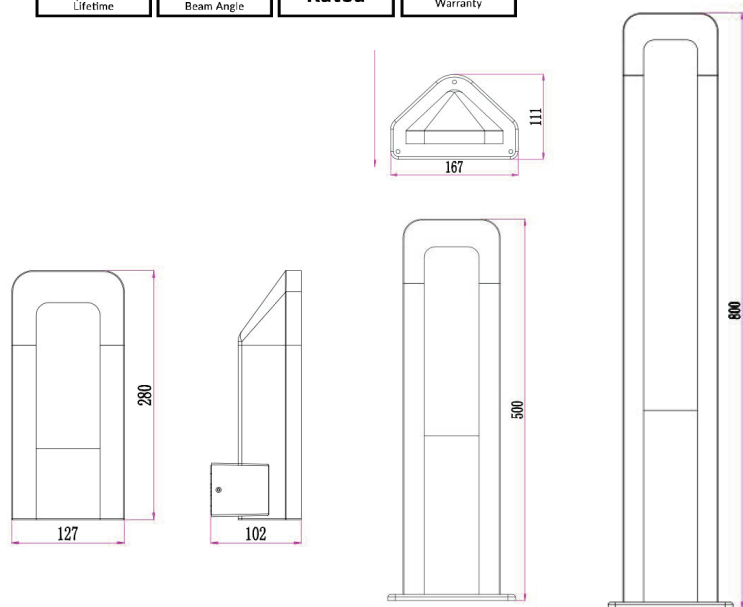

| PART NO. | DESCRIPTION | KELVIN (K) | LUMENS (LM) | Lumious Efficiency | WATT (W) | LEDs | CRI | WEIGHT (Kg) | BOX (cm) | CARTON QTY |
|----------|-----------------------------|------------|-------------|--------------------|----------|------------|-----|-------------|----------|------------|
| HATHOR1 | WALL LED DARK GREY S/M | 3000 | 175.58 | 19.56lm/W | 9 | 8pcs 3030 | >80 | 1.20 | 14x11x29 | 8 |
| HATHOR2 | BOLLARD LED DARK GREY 500mm | 3000 | 242.19 | 18.83lm/W | 13 | 12pcs 2835 | >80 | 1.84 | 18x12x51 | 4 |
| HATHOR3 | BOLLARD LED DARK GREY 800mm | 3000 | 242.19 | 18.83lm/W | 13 | 20pcs 2835 | >80 | 2.60 | 18x12x81 | 4 |

Brochure updated on 23.04.2018