




## Product Description:

- Natural silicon gel gasket used in the housing
- Stainless steel clips for locking and waterproof cable gland on side of the housing to ensure good waterproof function
- PC Diffuser
- PC wire clips to ensure electrical safety
- Prismatic diffuser with unique shape design
- Easy and quick to installation
- Plastic gear tray holder connected to the housing for easy maintenance

## Dimensions (Unit: mm)

1200mm : L1272 W86 H80 LF860

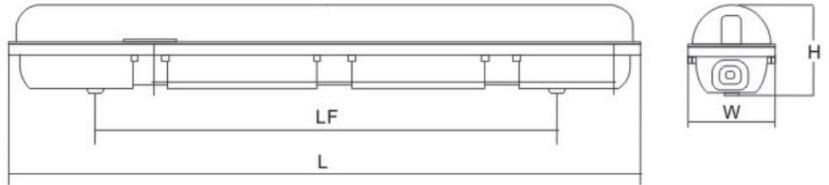

## Technical Data:

PRODUCT CODES:	HCP-238403	HCP-238404	HCP-238405
Colour Temperature (CCT)	3000k	4000k	5000k
Lumen (±10%)	4000lm	4200lm	4400lm
Input Voltage	AC100V-240V; 50/60Hz		
Power	<b>40W</b>		
LED Type	SMD		
LED Quantity	120pcs		
Dimension: unit = mm	1272x86x80		
Beam Angle	120°		
Color Rendering Index (CRI)	Ra >80		
Power Supply Efficiency	>95%		
LED Luminous Efficiency	Up to 110lm/W		
Power Factor (PF)	>0.95		
IP Rating	IP 65		
Certificate	C-TICK, SAA, CE, CB		
Material	PC+AL		
G.W.	1.05kg	1.67kg	1.84kg

## Certificates

