


Product Description:

- Adjustable round inground uplighter
- Stainless steel 316 marine grade cover
- 15° Tilt control on face of fitting
- Beam angle: 30°
- Trafficable to 1000kg
- Flush tempered glass
- Face diameter: 150mm
- Installation depth needed: 170mm
- Cut out not using plastic canister: 135mm
- Cut out using plastic canister: 138mm
- IP Rating: IP67
- IK Rating: IK10
- 24v DC Built in 4.5w LED CREE
- NOTE: adequate drainage must be allowed



Tilt adjustment tool

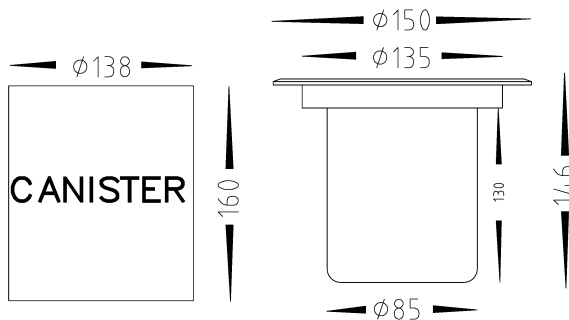

PRODUCT CODE:	HCP-251043	HCP-251044	HCP-251045
Colour Temperature (CCT)	3000k	4000k	5500k
Lumen (±10%)	360lm	380lm	400lm
Dimension: unit = mm	Light Fitting = 150mm x146mm		
Voltage	24v DC		
Power	4.5w		
LED Type	Cree LED		
Beam Angle	30°		
Color Rendering Index (CRI)	Ra >80		
Power Supply Efficiency	>95%		
LED Luminous Efficiency	up to 90lm/W		
Power Factor (PF)	>0.95		
IP Rating	IP 67		
Certificate	C-TICK, SAA, CE, CB		
Material	316 Stainless Steel + Aluminium		