


## 2 4G LED Dimming Controller

### Main Characteristics


#### V5 RF Dimming Remote Control

- Remote Option: Dimming, 4 Zones control
- Working Voltage: 3Vdc (Battery CR2032)
- Wireless Frequency: 2.4GHz
- Working Temperature: -30 ~55
- Package Size: L150xW46xH18(mm)
- Weight(G.W.): 85g

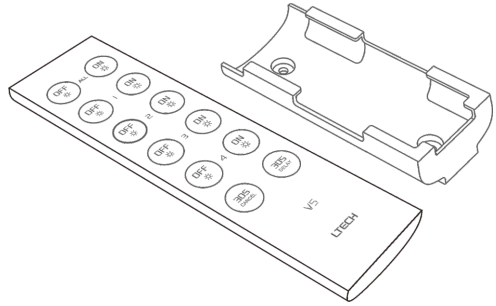


#### R4-3A CV Receiver

- Input Voltage: 5~24Vdc
- Max Current Load: 3A x 4CH Max. 12A
- Max Output Power: 60W/144W/288W(5V/12V/24V)
- Working Temperature: -30 ~55
- Package Size: L127xW35xH24(mm)
- Weight(G.W.): 60g



R4-3A



R4-5A/R4-CC

#### R4-5A CV Receiver


- Input Voltage: 5~24Vdc
- Max Current Load: 5A x 4CH Max. 20A
- Max Output Power: 100W/240W/480W(5V/12V/24V)
- Working Temperature: -30 ~55
- Package Size: L178xW48xH33(mm)
- Weight(G.W.): 150g

Note: Receiver is sold separately.


#### R4-CC CC Receiver

- Input Voltage: 12~48Vdc
- Output Voltage: 3~46Vdc
- Output Current: CC 350/700/1050mA x 4CH
- Output Power: 1.05W~48.3W x 4CH Max 193.2W
- Working Temperature: -30 ~55
- Package Size: L178xW48xH33(mm)
- Weight(G.W.): 165g


### Dimensions




V5



Holder




R4-5A/R4-CC



R4-3A


## Operating Instruction for Remote:

### Indicator Light

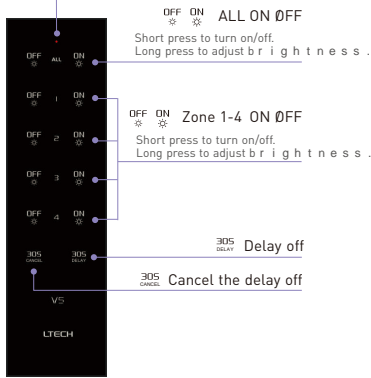


### Match/Clear code between remotes

#### Match code:

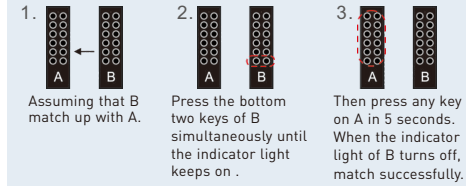


#### Clear code:




### Match/Clear code between remote and receiver


#### Match code:

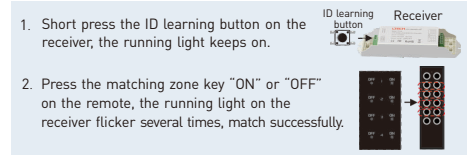


#### Clear code:



## Operating Instruction for Receiver:

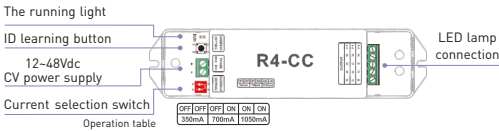

## Wiring Diagram :

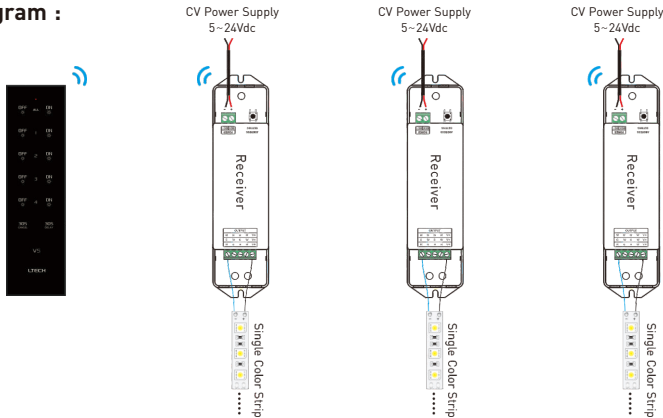

## Attention:

- Please replace the battery if the remote becomes insensitive or control distance is shortened.
- Please take out the battery for long time unused.