## Copper Round Recessed Step or Wall Light with Eyelid



#### PRODUCT SPECIFICATIONS

Name: Ollo

**Material:** 316 Stainless Steel + Copper

**Colour:** Copper (will age over time)

**IP Rating:** IP65

Lamp Base: MR16


**CRI:** ≥80

Cable Length: 300mm

Wiring: Parallel Dimmable: No


Warranty: 2 Years Replacement\*\*

Not suitable for inground use.












Compatible with Tri-Colour 9in1 3w, 5w, 7w 12v or 24v LED Globes







## **Product Ordering**

IMAGE	PART NUMBER	COLOURTEMP	LUMENS	INPUT	BEAM ANGLE	INCLUDED LED
	HV19012T-CP	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	120°	<b>Tri-Colour</b> 5w MR16 LED

12v DC models must be used with suitable 12v DC LED Driver

- \* Lumen output measured at source
- \*\* See Warranty Terms and Conditions for more information

For more information contact Havit Lighting

ADDRESS: 143 Beauchamp Road Matraville NSW 2036 Australia Tel: 02 9381 8300 Fax: 02 9666 8881 Email: sales@havit.com.au web: www.havit.com.au

## Black Round Recessed Step or Wall Light with Eyelid



#### PRODUCT SPECIFICATIONS

Name: Ollo

Material: 316 Stainless Steel

Colour: Poly powder coated black face

**IP Rating: IP65** 

Lamp Base: MR16


**CRI:** ≥80

Cable Length: 300mm

Wiring: Parallel Dimmable: No

Warranty: 2 Years Replacement\*\*

Not suitable for inground use.










Compatible with Tri-Colour 9in1 3w, 5w, 7w 12v or 24v LED Globes







### **Product Ordering**

IMAGE	PART NUMBER	COLOURTEMP	LUMENS	INPUT	BEAM ANGLE	INCLUDED LED
	HV19012T-BLK	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	120°	<b>Tri-Colour</b> 5w MR16 LED

12v DC models must be used with suitable 12v DC LED Driver

- \* Lumen output measured at source
- \*\* See Warranty Terms and Conditions for more information

For more information contact Havit Lighting

ADDRESS: 143 Beauchamp Road Matraville NSW 2036 Australia Tel: 02 9381 8300 Fax: 02 9666 8881 Email: sales@havit.com.au web: www.havit.com.au

## 316 Stainless Steel Round Recessed Step or Wall Light



#### PRODUCT SPECIFICATIONS

Name: Ollo

Material: 316 Stainless Steel

**Colour:** Stainless Steel

**IP Rating: IP65** 

Lamp Base: MR16 or GU10


**CRI:** ≥80

Cable Length: 300mm

Wiring: Parallel Dimmable: No

Warranty: 2 Years Replacement\*\*

Not suitable for inground use.












Compatible with Tri-Colour 9in1 3w, 5w, 7w 12v or 24v LED Globes







## **Product Ordering**

IMAGE	PART NUMBER	COLOURTEMP	LUMENS	INPUT	BEAM ANGLE	INCLUDED LED
	HV19012T-SS316	3000K 4000K 5500K	270lm 285lm 300lm	12v DC	120°	Tri-Colour 5w MR16 LED
	HV19032T-SS316	3000K 4000K 5500K	270lm 285lm 300lm	240V AC	120°	<b>Tri-Colour</b> 5w GU10 LED

12v DC models must be used with suitable 12v DC LED Driver

- \* Lumen output measured at source
- \*\* See Warranty Terms and Conditions for more information

For more information contact Havit Lighting

**ADDRESS:** 143 Beauchamp Road Matraville NSW 2036 Australia

02 9381 8300 02 9666 8881 Fax: Email: sales@havit.com.au web: www.havit.com.au

# Ollo Antique Brass Recessed Wall Light with Eyelid



#### **Product Specifications**

Todact Specifications						
Name	Ollo					
Material	316 Stainless Steel + Brass					
Colour	Stainless Steel + Antique Brass Face					
IP Rating	IP65					
Installation Type	Wall - Recessed					
Cable Length	300mm					
Lamp Base	MR16					
Max Wattage	20w					
Protection Class	3 (No Earth Required)					
Lamp Expectancy	<30,000hrs					
Diffuser Type	Clear Glass					
CRI	CRI>80					
Dimmable	No - Not with supplied globes					
IK Rating	IK08					
Warranty	3 Years Replacement*					


















#### **Optional Havit Compatible Accessories**

Image	Part Number	Colour Temp	Input Voltage	Beam Angle	Included LED	
	HV9507	3000k	12v DC	60°	TRI Colour	
11	HV9508	4000k 5500k	24v DC	00	3/5/7w MR16 LED	
	HV190-HC	Honeycomb Lens				
	12v DC LED Drivers	See Catalogue or Website for full range of 12v DC LED Drivers				

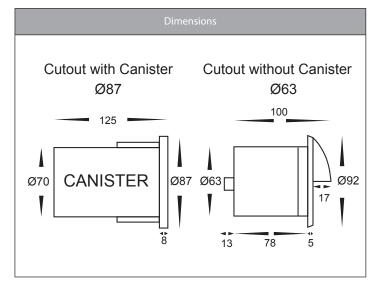

#### **Product Ordering**

Part Number	Colour Temp	Lumens	Input Voltage	Beam Angle	Included LED	Barcode
HV19012T-AB	3000k 4000k 5500k	270lm 285lm 300lm	12v DC	120°	<b>TRI Colour</b> 5w MR16 LED	9350418029973

<sup>\*</sup>Items ordered after 01-01-2022

# Ollo Brass Recessed Wall Light with Eyelid



#### **Product Specifications**

Name	Ollo
Material	316 Stainless Steel + Brass
Colour	Stainless Steel + Brass Face
IP Rating	IP65
Installation Type	Wall - Recessed
Cable Length	300mm
Lamp Base	MR16
Max Wattage	20w
Protection Class	3 (No Earth Required)
Lamp Expectancy	<30,000hrs
Diffuser Type	Clear Glass
CRI	CRI>80
Dimmable	No - Not with supplied globes
IK Rating	IK08
Warranty	3 Years Replacement*



















#### **Optional Havit Compatible Accessories**

Image	Part Number	Colour Temp	Input Voltage	Beam Angle	Included LED	
	HV9507	3000k	12v DC	60°	TRI Colour	
11	HV9508	4000k 5500k	24v DC	00	3/5/7w MR16 LED	
	HV190-HC	Honeycomb Lens				
	12v DC LED Drivers	See Catalogue or Website for full range of 12v DC LED Drivers				

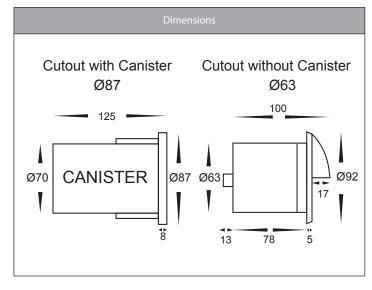

#### **Product Ordering**

Part Number	Colour Temp	Lumens	Input Voltage	Beam Angle	Included LED	Barcode
HV19012T-BR	3000k 4000k 5500k	270lm 285lm 300lm	12v DC	120°	<b>TRI Colour</b> 5w MR16 LED	9350418030047

<sup>\*</sup>Items ordered after 01-01-2022

# Ollo Graphite Coloured Brass Recessed Wall Light with Eyelid



### **Product Specifications**

Name	Ollo
Material	316 Stainless Steel + Brass
Colour	Stainless Steel + Graphite Coloured Brass Face
IP Rating	IP65
Installation Type	Wall - Recessed
Cable Length	300mm
Lamp Base	MR16
Max Wattage	20w
Protection Class	3 (No Earth Required)
Lamp Expectancy	<30,000hrs
Diffuser Type	Clear Glass
CRI	CRI>80
Dimmable	No - Not with supplied globes
IK Rating	IK08
Warranty	3 Years Replacement*
















#### **Optional Havit Compatible Accessories**

Image	Part Number	Colour Temp	Input Voltage	Beam Angle	Included LED	
	HV9507	3000k	12v DC	60°	TRI Colour	
-11	HV9508	4000k 5500k	24v DC	00	3/5/7w MR16 LED	
	HV190-HC	Honeycomb Lens				
	12v DC LED Drivers	See Catalogue or Website for full range of 12v DC LED Drivers				

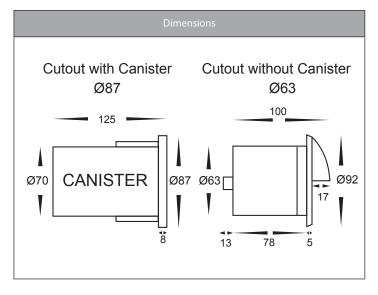

#### **Product Ordering**

Part Number	Colour Temp	Lumens	Input Voltage	Beam Angle	Included LED	Barcode
HV19012T-GPH	3000k 4000k 5500k	270lm 285lm 300lm	12v DC	120°	<b>TRI Colour</b> 5w MR16 LED	9350418029997

<sup>\*</sup>Items ordered after 01-01-2022