

General info


Indoor - Wall lamps



Ean	8021696121338
Item	BOW AP D26 BRUNITO
Installation	Wall lamps
Guarantee	5 years
Gross weight	0.84 kg
Volume	0.011664 m ³

Technical info

Net weight	0.64 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz Integrated switch button
Power supply	In-built, included Replaceable (by qualified operators only), electronic



Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 2,5 W
Emission	Direct
Max consumption	max 2,50 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
Light beam	110°
Light beam flux	360 lm
Useful light flux	230 lm
Bulb included	1 - E14 OLIVA 4W 3000K CRI80 SATIN

General info


Indoor - Wall lamps



Ean	8021696121154
Item	BOW AP D26 OTTONE
Installation	Wall lamps
Guarantee	5 years
Gross weight	0.84 kg
Volume	0.011664 m ³

Technical info

Net weight	0.64 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz Integrated switch button
Power supply	In-built, included Replaceable (by qualified operators only), electronic



Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 2,5 W
Emission	Direct
Max consumption	max 2,50 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
Light beam	110°
Light beam flux	360 lm
Useful light flux	230 lm
Bulb included	1 - E14 OLIVA 4W 3000K CRI80 SATIN

General info


Indoor - Wall lamps



Ean	8021696005386
Item	BOW AP D26 CROMO
Installation	Wall lamps
Guarantee	5 years
Gross weight	0.84 kg
Volume	0.011664 m ³

Technical info

Net weight	0.64 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz Integrated switch button
Power supply	In-built, included Replaceable (by qualified operators only), electronic



Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 2,5 W
Emission	Direct
Max consumption	max 2,50 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
Light beam	110°
Light beam flux	360 lm
Useful light flux	230 lm
Bulb included	1 - E14 OLIVA 4W 3000K CRI80 SATIN

General info


Indoor - Wall lamps



Ean	8021696121161
Item	BOW AP D46 BRUNITO
Installation	Wall lamps
Guarantee	5 years
Gross weight	1.03 kg
Volume	0.020736 m ³

Technical info

Net weight	0.79 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz Integrated switch button
Power supply	In-built, included Replaceable (by qualified operators only), electronic

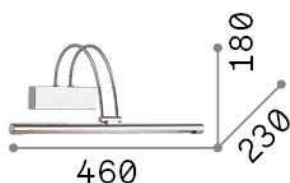

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 4,5 W
Emission	Direct
Max consumption	max 4,60 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
Light beam	110°
Light beam flux	570 lm
Useful light flux	390 lm
Bulb included	1 - E14 OLIVA 4W 3000K CRI80 SATIN


General info

Indoor - Wall lamps



Ean	8021696121178
Item	BOW AP D46 OTTONE
Installation	Wall lamps
Guarantee	5 years
Gross weight	1.03 kg
Volume	0.020736 m ³

Technical info

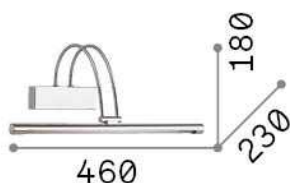

Net weight	0.79 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz Integrated switch button
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 4,5 W
Emission	Direct
Max consumption	max 4,60 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
Light beam	110°
Light beam flux	570 lm
Useful light flux	390 lm
Bulb included	1 - E14 OLIVA 4W 3000K CRI80 SATIN

General info


Indoor - Wall lamps



Ean	8021696007045
Item	BOW AP D46 CROMO
Installation	Wall lamps
Guarantee	5 years
Gross weight	1.03 kg
Volume	0.020736 m ³

Technical info

Net weight	0.79 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz Integrated switch button
Power supply	In-built, included Replaceable (by qualified operators only), electronic

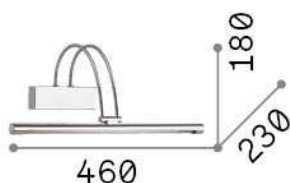

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 4,5 W
Emission	Direct
Max consumption	max 4,60 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
Light beam	110°
Light beam flux	570 lm
Useful light flux	390 lm
Bulb included	1 - E14 OLIVA 4W 3000K CRI80 SATIN

General info


Indoor - Wall lamps



Ean	8021696121147
Item	BOW AP D76 BRUNITO
Installation	Wall lamps
Guarantee	5 years
Gross weight	1.12 kg
Volume	0.032832 m ³

Technical info

Net weight	0.86 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz Integrated switch button
Power supply	In-built, included Replaceable (by qualified operators only), electronic

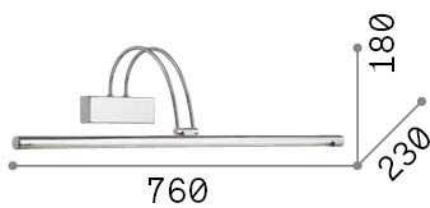

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 8 W
Emission	Direct
Max consumption	max 8,00 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
Light beam	110°
Light beam flux	980 lm
Useful light flux	660 lm
Bulb included	1 - E14 OLIVA 4W 3000K CRI80 SATIN

General info


Indoor - Wall lamps



Ean	8021696121130
Item	BOW AP D76 OTTONE
Installation	Wall lamps
Guarantee	5 years
Gross weight	1.12 kg
Volume	0.032832 m ³

Technical info

Net weight	0.86 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz Integrated switch button
Power supply	In-built, included Replaceable (by qualified operators only), electronic

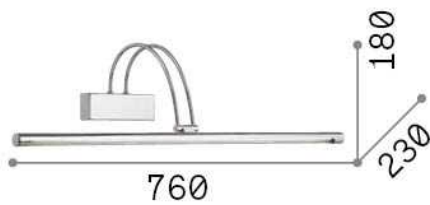

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 8 W
Emission	Direct
Max consumption	max 8,00 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
Light beam	110°
Light beam flux	980 lm
Useful light flux	660 lm
Bulb included	1 - E14 OLIVA 4W 3000K CRI80 SATIN

General info


Indoor - Wall lamps



Ean	8021696007021
Item	BOW AP D76 CROMO
Installation	Wall lamps
Guarantee	5 years
Gross weight	1.12 kg
Volume	0.032832 m ³

Technical info

Net weight	0.86 kg
Insulation class	I
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz Integrated switch button
Power supply	In-built, included Replaceable (by qualified operators only), electronic

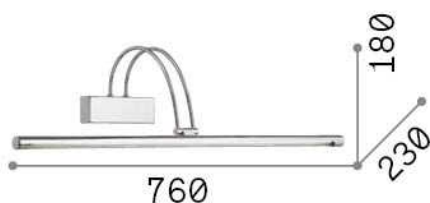

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 8 W
Emission	Direct
Max consumption	max 8,00 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
Light beam	110°
Light beam flux	980 lm
Useful light flux	660 lm
Bulb included	1 - E14 OLIVA 4W 3000K CRI80 SATIN