

## General info

### Indoor - Suspensions


<b>Ean</b>	8021696277370
<b>Item</b>	EQUINOXE SP1 D15 OTTONE
<b>Installation</b>	Suspensions
<b>Guarantee</b>	5 years
<b>Gross weight</b>	1.05 kg
<b>Volume</b>	0.01701 m <sup>3</sup>

## Technical info

<b>Net weight</b>	0.64 kg
<b>Insulation class</b>	II
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	NO, On-Off
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic

## Source info

<b>Integrated source</b>	Light bulb (included)
<b>Replaceable source</b>	Replaceable
<b>Power</b>	G4 max 1 x 2 W
<b>Emission</b>	Diffuse
<b>Max consumption</b>	-
<b>Bulb included</b>	1 - E14 OLIVA 4W 3000K CRI80 SATIN

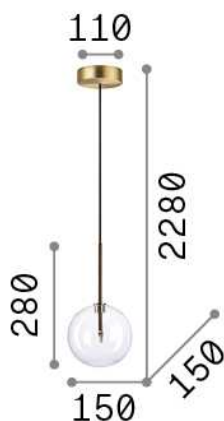

## General info

### Indoor - Suspensions

<b>Ean</b>	8021696306537
<b>Item</b>	EQUINOXE SP1 D15 CROMO
<b>Installation</b>	Suspensions
<b>Guarantee</b>	5 years
<b>Gross weight</b>	1.05 kg
<b>Volume</b>	0.01701 m <sup>3</sup>

## Technical info

<b>Net weight</b>	0.64 kg
<b>Insulation class</b>	II
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	NO, On-Off
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic

## Source info

<b>Integrated source</b>	Light bulb (included)
<b>Replaceable source</b>	Replaceable
<b>Power</b>	G4 max 1 x 2 W
<b>Emission</b>	Diffuse
<b>Max consumption</b>	-
<b>Bulb included</b>	1 - E14 OLIVA 4W 3000K CRI80 SATIN