


General info

Technical - Recessed lights

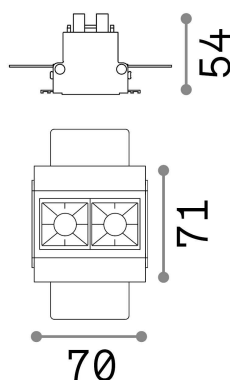

Ean	8021696206202
Item	LIKA FI TRIMLESS 06W 3000K BK
Installation	Recessed lights
Guarantee	5 years
Gross weight	0.3 kg
Volume	0.000576 m ³

Technical info


Net weight	0.22 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	Separate, included Replaceable (by qualified operators only), electronic
Recessed specifications	75 x 70 - h. ≥ 70 , 9-18
Accessories not included	Dimmable driver

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	6 W
Emission	Direct
Max consumption	max 5,50 W
Features LED	LED SMD OSRAM
CCT LED	3000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
Light beam	29°
UGR Maximum	< 16
Light beam flux	480 lm
Useful light flux	430 lm
Photobiological risk	2

General info

Technical - Recessed lights

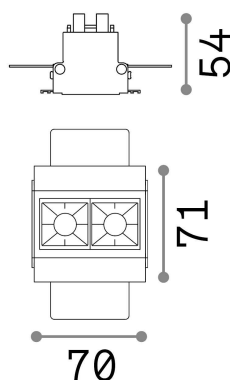

Ean	8021696267890
Item	LIKA FI TRIMLESS 06W 4000K BK
Installation	Recessed lights
Guarantee	5 years
Gross weight	0.3 kg
Volume	0.000576 m ³

Technical info

Net weight	0.22 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	Separate, included Replaceable (by qualified operators only), electronic
Recessed specifications	75 x 70 - h. ≥ 70 , 9-18
Accessories not included	Dimmable driver

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	6 W
Emission	Direct
Max consumption	max 5,50 W
Features LED	LED SMD OSRAM
CCT LED	4000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
Light beam	29°
UGR Maximum	< 16
Light beam flux	520 lm
Useful light flux	470 lm
Photobiological risk	2