Oracle slim

rev. 20-12-2023

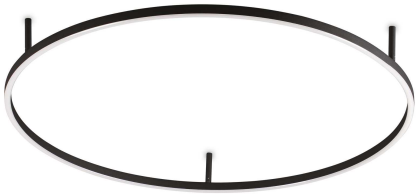

General info

Indoor - Ceiling lamps

Ean	8021696266022
Item	ORACLE SLIM PL D090 ROUND 3000K ON-OFF BK
Installation	Ceiling lamps
Guarantee	5 years
Gross weight	4.3 kg
Volume	0.134456 m^3

Technical info

Net weight	1.7 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Repleaceable source	Replaceable (by qualified operators only)
Power	LED 55 W
Emission	Direct
Max consuption	max 55,00 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°c)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	5300 lm
Useful light flux	2740 lm

IDEAL LUX s.r.l.
Via Taglio Destro, 32, 30035 Mirano (Venezia)
Tel +39 041 5790500 | **Fax** +39 041 8872349 | **E-mail** info@ideal-lux.com
www.ideal-lux.com

Oracle slim

rev. 20-12-2023

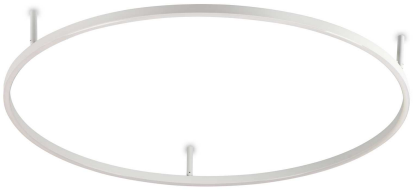

General info

Indoor - Ceiling lamps

Ean	8021696266015
Item	ORACLE SLIM PL D090 ROUND 3000K ON-OFF WH
Installation	Ceiling lamps
Guarantee	5 years
Gross weight	4.8 kg
Volume	0.134456 m^3

Technical info

Net weight	1.7 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Repleaceable source	Replaceable (by qualified operators only)
Power	LED 55 W
Emission	Direct
Max consuption	max 55,00 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°c)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	5300 lm
Useful light flux	3150 lm

IDEAL LUX s.r.l.
Via Taglio Destro, 32, 30035 Mirano (Venezia)
Tel +39 041 5790500 | **Fax** +39 041 8872349 | **E-mail** info@ideal-lux.com
www.ideal-lux.com