

General info

Indoor - Suspensions

Ean	8021696229515
Item	ORACLE SLIM SP D070 ROUND 3000K ON-OFF BK
Installation	Suspensions
Guarantee	5 years
Gross weight	3.22 kg
Volume	0.080864 m ³

Technical info

Net weight	1.66 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	38 W
Emission	Direct
Max consumption	max 38,00 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	4300 lm
Useful light flux	2220 lm



General info

Indoor - Suspensions


Ean	8021696229485
Item	ORACLE SLIM SP D070 ROUND 3000K ON-OFF WH
Installation	Suspensions
Guarantee	5 years
Gross weight	3.22 kg
Volume	0.080864 m ³

Technical info

Net weight	1.66 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	38 W
Emission	Direct
Max consumption	max 38,00 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	4300 lm
Useful light flux	2550 lm

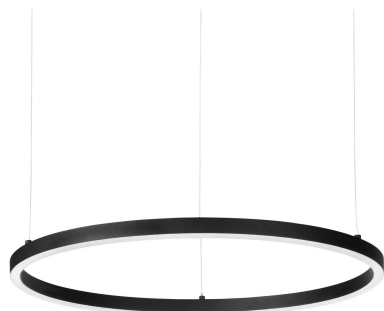

General info

Indoor - Suspensions

Ean	8021696304410
Item	ORACLE SLIM SP D070 ROUND 4000K ON-OFF BK
Installation	Suspensions
Guarantee	5 years
Gross weight	3.25 kg
Volume	0.080864 m ³

Technical info

Net weight	1.2 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	38 W
Emission	Direct
Max consumption	max 38,00 W
Features LED	LED SMD
CCT LED	4000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	4500 lm
Useful light flux	2320 lm
Photobiological risk	1



General info

Indoor - Suspensions

Ean	8021696269863
Item	ORACLE SLIM SP D070 ROUND 4000K ON-OFF WH
Installation	Suspensions
Guarantee	5 years
Gross weight	3.22 kg
Volume	0.080864 m ³

Technical info

Net weight	1.66 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	38 W
Emission	Direct
Max consumption	max 38,00 W
Features LED	LED SMD
CCT LED	4000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	3
Light beam	115°
Light beam flux	4500 lm
Useful light flux	2670 lm