

## General info

### Indoor - Suspensions



<b>Ean</b>	8021696304540
<b>Item</b>	OZ SP D60 DALI BIANCO
<b>Installation</b>	Suspensions
<b>Guarantee</b>	5 years
<b>Gross weight</b>	3.27 kg
<b>Volume</b>	0.035362 m <sup>3</sup>

## Technical info

<b>Net weight</b>	1.5 kg
<b>Insulation class</b>	II
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	1, DALI / Push
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	No
<b>Power</b>	48 W
<b>Emission</b>	Diffuse
<b>Max consumption</b>	max 48,00 W
<b>Features LED</b>	LED SMD
<b>CCT LED</b>	3000 K
<b>Duration LED (t. 25°C)</b>	30000 h
<b>CRI</b>	> 80
<b>Light beam</b>	-
<b>Light beam flux</b>	5300 lm
<b>Useful light flux</b>	2170 lm
<b>Photobiological risk</b>	1
<b>Standby power</b>	< 0.50 W

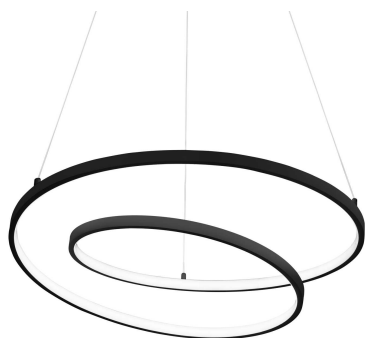

## General info

### Indoor - Suspensions


<b>Ean</b>	8021696304557
<b>Item</b>	OZ SP D60 DALI NERO
<b>Installation</b>	Suspensions
<b>Guarantee</b>	5 years
<b>Gross weight</b>	3.27 kg
<b>Volume</b>	0.035362 m <sup>3</sup>

## Technical info

<b>Net weight</b>	1.5 kg
<b>Insulation class</b>	II
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	1, DALI / Push
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	No
<b>Power</b>	48 W
<b>Emission</b>	Diffuse
<b>Max consumption</b>	max 48,00 W
<b>Features LED</b>	LED SMD
<b>CCT LED</b>	3000 K
<b>Duration LED (t. 25°C)</b>	30000 h
<b>CRI</b>	> 80
<b>Light beam</b>	-
<b>Light beam flux</b>	5300 lm
<b>Useful light flux</b>	1970 lm
<b>Photobiological risk</b>	1
<b>Standby power</b>	< 0.50 W



## General info

### Indoor - Suspensions


<b>Ean</b>	8021696304564
<b>Item</b>	OZ SP D60 DALI OTTONE
<b>Installation</b>	Suspensions
<b>Guarantee</b>	5 years
<b>Gross weight</b>	3.27 kg
<b>Volume</b>	0.035362 m <sup>3</sup>

## Technical info

<b>Net weight</b>	1.5 kg
<b>Insulation class</b>	II
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	1, DALI / Push
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	No
<b>Power</b>	48 W
<b>Emission</b>	Diffuse
<b>Max consumption</b>	max 48,00 W
<b>Features LED</b>	LED SMD
<b>CCT LED</b>	3000 K
<b>Duration LED (t. 25°C)</b>	30000 h
<b>CRI</b>	> 80
<b>Light beam</b>	-
<b>Light beam flux</b>	5300 lm
<b>Useful light flux</b>	1970 lm
<b>Photobiological risk</b>	1
<b>Standby power</b>	< 0.50 W



## General info

### Indoor - Suspensions



<b>Ean</b>	8021696304571
<b>Item</b>	OZ SP D80 DALI BIANCO
<b>Installation</b>	Suspensions
<b>Guarantee</b>	5 years
<b>Gross weight</b>	4.72 kg
<b>Volume</b>	0.060692 m <sup>3</sup>

## Technical info

<b>Net weight</b>	1.9 kg
<b>Insulation class</b>	II
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	1, DALI / Push
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	No
<b>Power</b>	55 W
<b>Emission</b>	Diffuse
<b>Max consumption</b>	max 55,00 W
<b>Features LED</b>	LED SMD
<b>CCT LED</b>	3000 K
<b>Duration LED (t. 25°C)</b>	30000 h
<b>CRI</b>	> 80
<b>Light beam</b>	-
<b>Light beam flux</b>	6100 lm
<b>Useful light flux</b>	2740 lm
<b>Photobiological risk</b>	1
<b>Standby power</b>	< 0.50 W

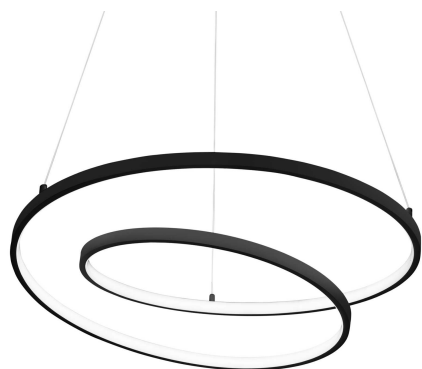

## General info

### Indoor - Suspensions


<b>Ean</b>	8021696304588
<b>Item</b>	OZ SP D80 DALI NERO
<b>Installation</b>	Suspensions
<b>Guarantee</b>	5 years
<b>Gross weight</b>	4.72 kg
<b>Volume</b>	0.060692 m <sup>3</sup>

## Technical info

<b>Net weight</b>	1.9 kg
<b>Insulation class</b>	II
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	1, DALI / Push
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	No
<b>Power</b>	55 W
<b>Emission</b>	Diffuse
<b>Max consumption</b>	max 55,00 W
<b>Features LED</b>	LED SMD
<b>CCT LED</b>	3000 K
<b>Duration LED (t. 25°C)</b>	30000 h
<b>CRI</b>	> 80
<b>Light beam</b>	-
<b>Light beam flux</b>	6100 lm
<b>Useful light flux</b>	2510 lm
<b>Photobiological risk</b>	1
<b>Standby power</b>	< 0.50 W



## General info

### Indoor - Suspensions

<b>Ean</b>	8021696304595
<b>Item</b>	OZ SP D80 DALI OTTONE
<b>Installation</b>	Suspensions
<b>Guarantee</b>	5 years
<b>Gross weight</b>	4.72 kg
<b>Volume</b>	0.060692 m <sup>3</sup>

## Technical info

<b>Net weight</b>	1.9 kg
<b>Insulation class</b>	II
<b>Protection index</b>	IP20
<b>Compliance</b>	CE
<b>Operating temperature</b>	0° ~ +40 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	1, DALI / Push
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic

## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	No
<b>Power</b>	55 W
<b>Emission</b>	Diffuse
<b>Max consumption</b>	max 55,00 W
<b>Features LED</b>	LED SMD
<b>CCT LED</b>	3000 K
<b>Duration LED (t. 25°C)</b>	30000 h
<b>CRI</b>	> 80
<b>Light beam</b>	-
<b>Light beam flux</b>	6100 lm
<b>Useful light flux</b>	2510 lm
<b>Photobiological risk</b>	1
<b>Standby power</b>	< 0.50 W