

## General info


## Outdoor - Wall lamps



Ean	8021696287713
Item	SWIPE AP SENSOR ANTRACITE
Installation	Wall lamps
Guarantee	5 years
Gross weight	1.41 kg
Volume	0.005463 m <sup>3</sup>

## Technical info

Net weight	1.3 kg
Insulation class	I
Protection index	IP54
Compliance	CE
Operating temperature	-15° ~ +45 °C
Full load efficiency	X
Dimmer	NO, On-Off, PIR Motion Sensor
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic
Adjustability	vert. 0°-350°

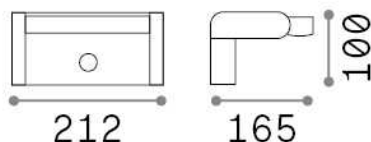

## Source info

Integrated source	Integrated LED module
Replaceable source	No
Power	LED 21 W
Emission	Direct
Max consumption	max 21 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
Light beam	105°
Light beam flux	2000 lm
Useful light flux	1390 lm
Photobiological risk	1
Standby power	< 0.50 W

## General info


## Outdoor - Wall lamps



<b>Ean</b>	8021696287720
<b>Item</b>	SWIPE AP SENSOR BIANCO
<b>Installation</b>	Wall lamps
<b>Guarantee</b>	5 years
<b>Gross weight</b>	1.41 kg
<b>Volume</b>	0.005463 m <sup>3</sup>

## Technical info

<b>Net weight</b>	1.3 kg
<b>Insulation class</b>	I
<b>Protection index</b>	IP54
<b>Compliance</b>	CE
<b>Operating temperature</b>	-15° ~ +45 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	NO, On-Off, PIR Motion Sensor
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic
<b>Adjustability</b>	vert. 0°-350°



## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	No
<b>Power</b>	LED 21 W
<b>Emission</b>	Direct
<b>Max consumption</b>	max 21 W
<b>Features LED</b>	LED SMD
<b>CCT LED</b>	3000 K
<b>Duration LED (t. 25°C)</b>	50000 h
<b>CRI</b>	> 80
<b>Light beam</b>	105°
<b>Light beam flux</b>	2000 lm
<b>Useful light flux</b>	1390 lm
<b>Photobiological risk</b>	1
<b>Standby power</b>	< 0.50 W

## General info


## Outdoor - Wall lamps



<b>Ean</b>	8021696307176
<b>Item</b>	SWIPE AP SENSOR COFFEE
<b>Installation</b>	Wall lamps
<b>Guarantee</b>	5 years
<b>Gross weight</b>	1.41 kg
<b>Volume</b>	0.005463 m <sup>3</sup>

## Technical info

<b>Net weight</b>	1.3 kg
<b>Insulation class</b>	I
<b>Protection index</b>	IP54
<b>Compliance</b>	CE
<b>Operating temperature</b>	-15° ~ +45 °C
<b>Full load efficiency</b>	X
<b>Dimmer</b>	NO, On-Off, PIR Motion Sensor
<b>Power output</b>	220-240 V AC 50/60 Hz
<b>Power supply</b>	In-built, included Replaceable (by qualified operators only), electronic
<b>Adjustability</b>	vert. 0°-350°



## Source info

<b>Integrated source</b>	Integrated LED module
<b>Replaceable source</b>	No
<b>Power</b>	LED 21 W
<b>Emission</b>	Direct
<b>Max consumption</b>	max 21 W
<b>Features LED</b>	LED SMD
<b>CCT LED</b>	3000 K
<b>Duration LED (t. 25°C)</b>	50000 h
<b>CRI</b>	> 80
<b>Light beam</b>	105°
<b>Light beam flux</b>	2000 lm
<b>Useful light flux</b>	1390 lm
<b>Photobiological risk</b>	1
<b>Standby power</b>	< 0.50 W

## General info


## Outdoor - Wall lamps



Ean	8021696287737
Item	SWIPE AP SENSOR NERO
Installation	Wall lamps
Guarantee	5 years
Gross weight	1.41 kg
Volume	0.005463 m <sup>3</sup>

## Technical info

Net weight	1.3 kg
Insulation class	I
Protection index	IP54
Compliance	CE
Operating temperature	-15° ~ +45 °C
Full load efficiency	X
Dimmer	NO, On-Off, PIR Motion Sensor
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic
Adjustability	vert. 0°-350°

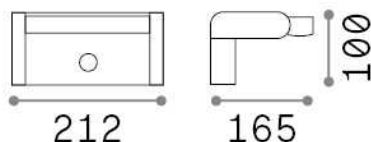

## Source info

Integrated source	Integrated LED module
Replaceable source	No
Power	LED 21 W
Emission	Direct
Max consumption	max 21 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	50000 h
CRI	> 90
Light beam	105°
Light beam flux	2000 lm
Useful light flux	1390 lm
Photobiological risk	1
Standby power	< 0.50 W