

General info

Indoor - Suspensions

Indoor suspended linear fitting with integrated LED sources and direct light emission



Ean	8021696275369
Item	V-LINE SP BIANCO
Installation	Suspension
Guarantee	5 years
Gross weight	1.86 kg
Volume	0.00575 m ³

Technical info

Net weight	1.05 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 20 W
Emission	Direct
Max consumption	max 20 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	5
Light beam	60°
Light beam flux	1800 lm
Useful light flux	930 lm
Photobiological risk	EXEMPT
Standby power	< 0.50 W

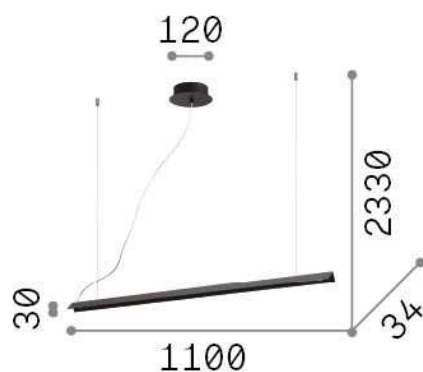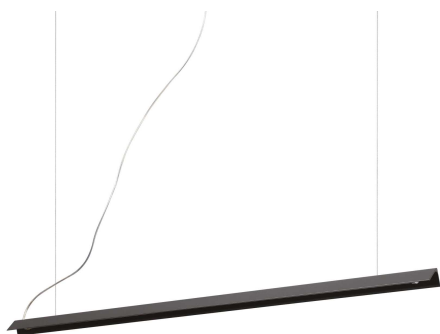

General info

Indoor - Suspensions

Indoor suspended linear fitting with integrated LED sources and direct light emission



Ean	8021696275376
Item	V-LINE SP NERO
Installation	Suspension
Guarantee	5 years
Gross weight	1.86 kg
Volume	0.00575 m ³

Technical info

Net weight	1.05 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 20 W
Emission	Direct
Max consumption	max 20 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	5
Light beam	60°
Light beam flux	1800 lm
Useful light flux	930 lm
Photobiological risk	EXEMPT
Standby power	< 0.50 W

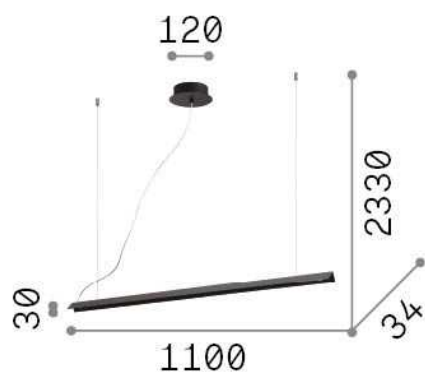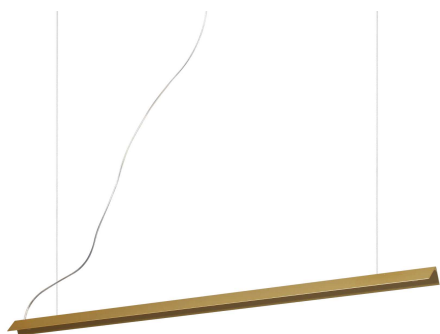

General info

Indoor - Suspensions

Indoor suspended linear fitting with integrated LED sources and direct light emission

Ean	8021696275383
Item	V-LINE SP OTTONE
Installation	Suspension
Guarantee	5 years
Gross weight	1.86 kg
Volume	0.00575 m ³

Technical info

Net weight	1.05 kg
Insulation class	II
Protection index	IP20
Compliance	CE
Operating temperature	0° ~ +40 °C
Full load efficiency	X
Dimmer	NO, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included Replaceable (by qualified operators only), electronic

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	LED 20 W
Emission	Direct
Max consumption	max 20 W
Features LED	LED SMD
CCT LED	3000 K
Duration LED (t. 25°C)	20000 h
CRI	> 80
SDCM	5
Light beam	60°
Light beam flux	1800 lm
Useful light flux	930 lm
Photobiological risk	EXEMPT
Standby power	< 0.50 W