

LIGHT MODES

ON - Dusk to Dawn mode

Automatically turning on at dusk and running for 6-8hrs a night, the light will turn off when the panel senses light again

P - PIR Sensor Mode

When PIR sensor is triggered, light turns on for 1 minute, and then turns off

OFF - Light is off

INSTALLATION METHOD

1. Remove contents from packaging

NOTE: Before continuing, we recommend you put your light in direct sunlight (with the switch in the "OFF" position) for 2 days before installation

2. Locate a position where your light will receive maximum direct sunlight throughout the day
3. Make sure to switch your light head to the mode you wish to operate in before installation (**FIGURE 2**)
4. Using the supplied Nuts & Bolts, fix the pillar base mount in your desired location
5. To connect light head to the top of your pillar base, twist the light head into the connector (**FIGURE 1**)

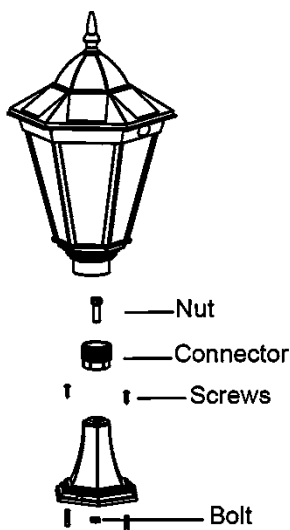


FIGURE 1

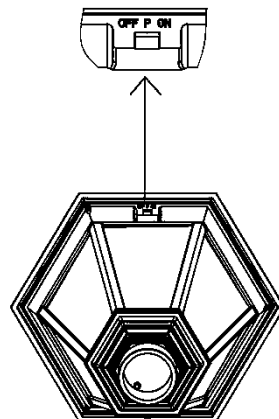


FIGURE 2



IMPORTANT NOTES

- Please ensure you place the solar panel in a location where it can achieve a minimum of 6HRS DIRECT SUNLIGHT
- Be aware that on overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore, your light may turn off earlier than specified
- It's best not to install the fitting underneath a street light, porch light etc. because this may stop the automatic day-night sensor triggering and result in your lights not turning on

TROUBLE SHOOTING

Phenomenon	Cause	Inspection Method	Solution
Light won't turn on	Switch hasn't been turned on	Determine what position the switch is in	Turn the switch on
	Battery has run flat	Period of rainy or cloudy weather or installation site doesn't provide enough direct sunlight	Charge the light in direct sunlight for 1-2 days then check again
The light only stays on for a short amount of time	Low Battery	1. Bad installation site for the solar panel 2. Dust or leaves are covering the panel 3. Long period of overcast weather	1. Charge the battery in direct sunlight for 1-2 days with the switch off, then check again 2. Clean the solar panel
	Battery Failure	1. Access the light and & replace battery 2. Battery has matured	Contact SLD Customer Service to buy new batteries