



**Solar
Lighting
DIRECT**

INSTRUCTION GUIDE

Residential Single Head Post Light

Model No. SLDPL0007A, SLDPL0008A, SLDPL0009A, SLDPL0012A, SLDPL0018A



LIGHT MODES

ON - Dusk to Dawn mode

Automatically turning on at dusk and running for 6-8hrs a night, the light will turn off when the panel senses light again

P – PIR Sensor Mode

When PIR sensor is triggered, light turns on for 1 minute, and then turns off


OFF - Light is off

INSTALLATION METHOD

1. Remove contents from packaging

NOTE: Before continuing, we recommend you place your light direct sunlight (with the switch in the "OFF" position) for 2 days before installation

2. Make sure to switch your light head to the mode you wish to operate in before installation (**FIGURE 3**)
3. Using the supplied Nuts & Bolts, fix the post base mount in your desired location
4. To connect the 4 part post - start with the bigger pieces on the bottom. Twist them into each other clockwise to tighten. Work towards the smaller pieces at the top (**FIGURE 1**)
5. To connect light head to the post top, twist the light head into the adapter (**FIGURE 2**)

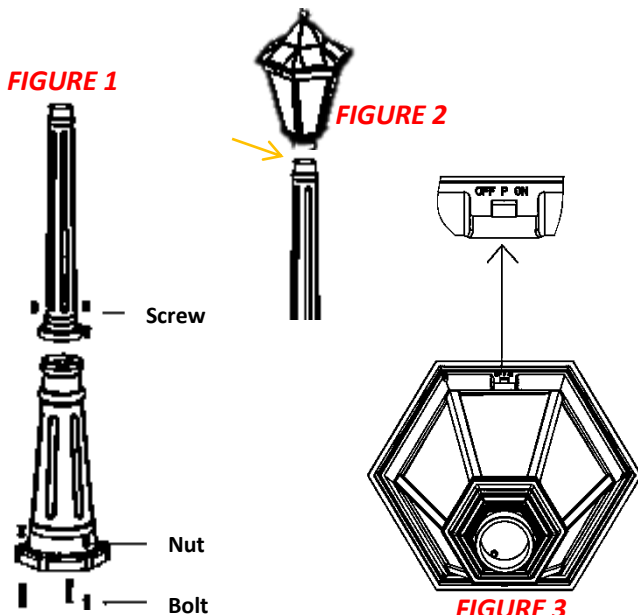

IMPORTANT NOTES

- Please ensure you place your solar panel in a location where it can achieve a minimum of 6HRS DIRECT SUNLIGHT
- Be aware that on overcast/cloudy days, the solar panel will still charge. However, not as efficiently as a sunny day, so the battery may not reach full capacity. Therefore, your light may turn off earlier than specified
- It's best not to install the fitting underneath a street light, porch light etc. because this may stop the automatic day-night sensor triggering and result in your lights not turning on

TROUBLE SHOOTING

| Phenomenon | Cause | Inspection Method | Solution |
|--|------------------------------|--|---|
| Light won't turn on | Switch hasn't been turned on | Determine what position the switch is in | Turn the switch on |
| | Battery has run flat | Period of rainy or cloudy weather or installation site doesn't provide enough direct sunlight | Charge the light in direct sunlight for 1-2 days then check again |
| The light only stays on for a short amount of time | Low Battery | 1. Bad installation site for the solar panel 2. Dust or leaves are covering the panel 3. Long period of overcast weather | 1. Charge the battery in direct sunlight for 1-2 days with the switch off, then check again 2. Clean the solar panel |
| | | 1. Access the light and replace battery 2. Battery has matured | Contact SLD Customer Service to buy new batteries |