


SSL-28N/27N/26N/25N/24N/23N/22N

TITANS SERIES SOLAR STREET LIGHT



-15 Degree



0 Degree




15 Degree




30 Degree



Lateral View

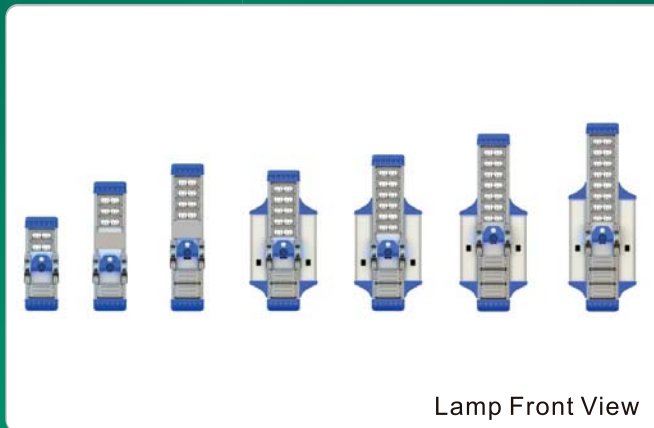

Lamp Front View

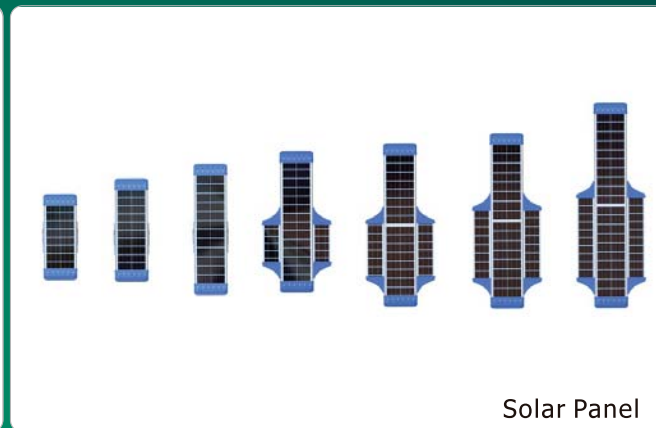

Solar Panel



80W
SSL-28N
2258*810*385mm

70W
SSL-27N
2096*810*385mm

60W
SSL-26N
1875*810*385mm

50W
SSL-25N
1687*810*385mm

40W
SSL-24N
1770*421*385mm

30W
SSL-23N
1530*421*385mm

20W
SSL-22N
1116*421*385mm



-15,0,15,30 Four-degree angle to confirm the most effective charging efficiency. Professional Lighting distribution can keep the same angle while the Solar Panel angle changing.



Professional Fresnel lens to achieve 20 m and 120 degree detectable area, far more than the competitor





Aircraft Carrier design to enlarge the solar panel and battery. Provide a longer lighting time



Street, Courtyard, Garden, Park, Roadway, pathway, Parking Lot, Campus, Farm & Ranch, Military Base

TITANS SERIES Remote Control Solar Street Light

Different Angle and High efficiency Charge,
Never Affected by the Installation Position.

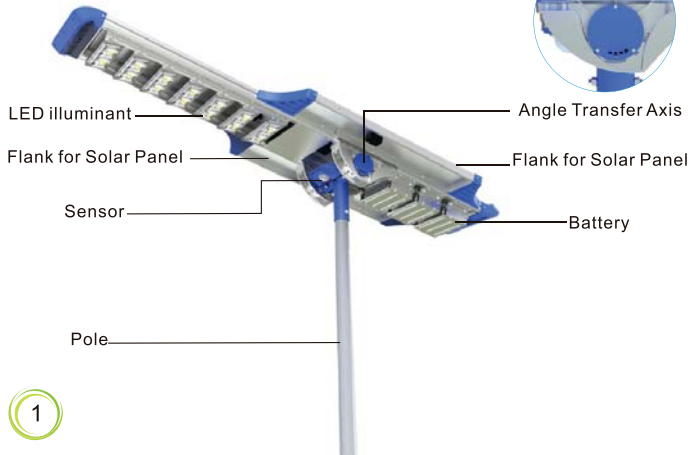

Model	SSL-22N	SSL-23N	SSL-24N	SSL-25N	SSL-26N	SSL-27N	SSL-28N
LED	20W	30W	40W	50W	60W	70W	80W
Solar Panel	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery
Solar Charging Time	9-10 hours by bright sunlight	9-10 hours by bright sunlight	9-10 hours by bright sunlight	10 hours by bright sunlight	10 hours by bright sunlight	10 hours by bright sunlight	10 hours by bright sunlight
Lighting Time	4-7 Nights after fully Charged	4-7 Nights after fully Charged	4-7 Nights after fully Charged	4-7 Nights after fully Charged	4-7 Nights after fully Charged	4-7 Nights after fully Charged	4-7 Nights after fully Charged
Lighting Mode	10 types	10 types	10 types	10 types	10 types	10 types	10 types
Material	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC
Waterproof	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Product Size	1116*421*385mm	1530*421*385mm	1770*421*385mm	1687*810*385mm	1875*810*385mm	2096*810*385mm	2258*810*385mm
Application	Street,Courtyard,Garden, Park,Roadway,pathway,Parking Lot,Campus,Farm & Ranch,Military Base						