

Last modification 2021-03-01

ROSARIO OY40-SM
9329501054840



The Rosario oyster utilizes state of the art LED lighting to create a contemporary modern style. The domed starlight diffuser evenly dispenses the illumination and is encased by a clear or smoke ribbed deco trim. The universal style complements a range of interior spaces. CCT changeable by internal slide switch, this simple oyster will light your space with a streamlined beauty. OY40 is triac dimmable.

Overview

Family name	Rosario
Item Type	Oysters (OY)
Mounting	Surface

Color / Material

Fixture Color 1	Smoke
------------------------	-------

Size

Fixture Diameter (cm)	40.5
Fixture Height (cm)	6.5
Canopy Diameter (cm)	35.5

Specification

Voltage Input	240V
Wattage (max)	30
Wattage	30W
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	2400
Color Temperature	Warm White; Cool White; Daylight
Color Kelvin	3 CCT (3000k - 4000k - 5500k)
Color Rendering	>84
Dimmable	Triac
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Control Gear Included	Yes-integrated
IP rating	IP20
Warranty	3


Barcode

GTIN	9329501054840
-------------	---------------

Pricing

PRICE - RRP incGST	115.0
---------------------------	-------

Image -dimensions

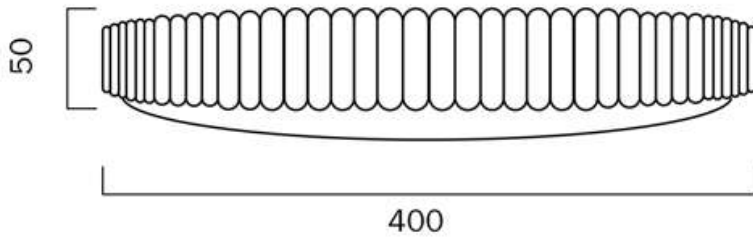



Last modification 2021-03-01

ROSARIO OY40-CL
9329501054833



The Rosario oyster utilizes state of the art LED lighting to create a contemporary modern style. The domed starlight diffuser evenly dispenses the illumination and is encased by a clear or smoke ribbed deco trim. The universal style complements a range of interior spaces. CCT changeable by internal slide switch, this simple oyster will light your space with a streamlined beauty. OY40 is triac dimmable.

Overview

Family name	Rosario
Item Type	Oysters (OY)
Mounting	Surface

Color / Material

Fixture Color 1	Clear
------------------------	-------

All representations within this document are subject to copyright. ELECTRICAL INSTALLATIONS MUST BE PERFORMED BY A QUALIFIED ELECTRICAL CONTRACTOR AND INSTALLED IN ACCORDANCE WITH AS/NZS 3000.
NOTE : All images , descriptions and dimensions are indicative. Please check latest version of item detail on Telbix website prior to ordering or installation.

Size

Fixture Diameter (cm)	40.5
Fixture Height (cm)	6.5
Canopy Diameter (cm)	35.5

Specification

Voltage Input	240V
Wattage (max)	30
Wattage	30W
Globe Type	LED integrated SMD
Globe / Light Source qty	1
Globe / Light Source included	Yes
Lumens	2400
Color Temperature	Warm White; Cool White; Daylight
Color Kelvin	3 CCT (3000k - 4000k - 5500k)
Color Rendering	>84
Dimmable	Triac
Power Factor	>0.90
Surge Protection	Yes (1.5 Kva)
Control Gear Included	Yes-integrated
IP rating	IP20
Warranty	3

Barcode

GTIN	9329501054833
-------------	---------------

Pricing

PRICE - RRP incGST	115.0
---------------------------	-------

