


HEATSTRIP[®] MAX DC

WITH REMOTE

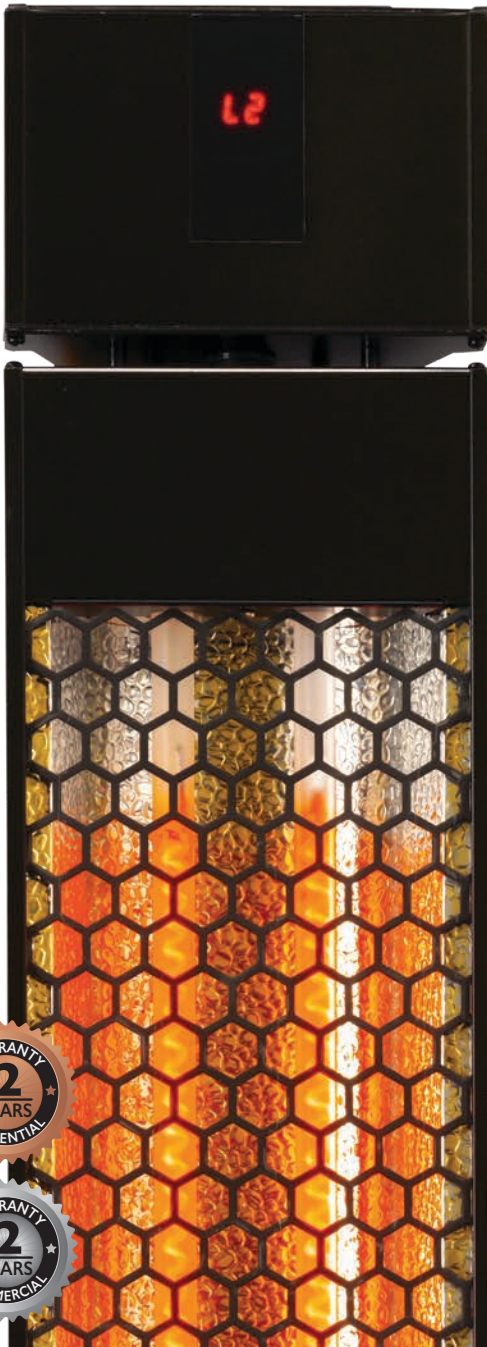


Max heat, max style with this heating solution for exposed and hard to heat areas such as balconies, pergolas, warehouses and restaurants.

- Electric infrared heater.
- 2 models available. THX2400DCR (2400W) & THX3600DCR (3600W).
- Dual heat infrared carbon element technology and upgraded heat reflector design that delivers world class performance.
- The remote and control panel provides 3 heat levels with adjustable timer options from 0-24 hours with the touch of a button.
- Convenient DIY installation for the 2200W model. 3600W model must be hard-wired.
- Ideal mounting height 2.2-2.8m. Max mounting height 3m.



Anodised alloy components provide corrosion protection, also suitable for coastal locations.



Commercial quality and construction. With a stylish hexagonal grille and black finish.

Model	Running Costs**	Power	Current	Dimensions	Weight kg	Lead Length	Plug	Heating Area	Mounting Bracket	Flush Mount Kit	Extension Poles
THX2400DCR	60c / hr	2400 Watts	10 amps	979x170x80mm	6 kg	1000 mm	Yes	7-12 m ²	ZBRAK-132B	THXAC-034	THYAC-047 (300mm) THYAC-048 (600mm)
THX3600DCR*	90c / hr	3600 Watts	15 amps	1190x170x80mm	8 kg	1000 mm	No*	11-18 m ²	ZBRAK-132B	THXAC-035	THYAC-049 (900mm) THYAC-050 (1200mm)

Materials of construction: Anodised alloy casing and end caps, with a black powder coated grille. IPX5 rated.
** Running cost based off \$0.25/kWh energy tariff.

***This unit must be installed by a licensed electrician.**