





PLATINUM P12L

Architectural design, remarkable efficiency and class leading light performance are the typical traits that make the Platinum P12L the ultimate downlight.

Dimensions

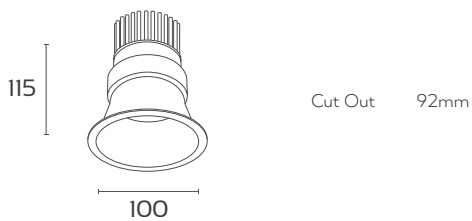

Photometry

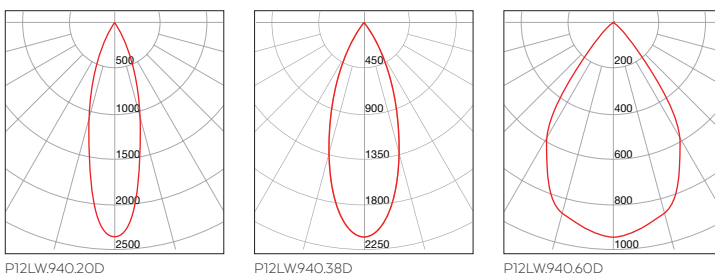

Order Code

Example Code: **P12LW** . **930** . **20D** (White Trim 3000K 20° Beam)

P12LW White Trim	927 2700K	20D 20° Beam
P12LB Black Trim	930 3000K	38D 38° Beam
	935 3500K	60D 60° Beam
	940 4000K	

1500+
COB LUMENS

94+
CRI

5 YEAR
WARRANTY

LED Characteristics

Luminous Flux	1147 lm (4000K, 60° Beam)
CCT	2700K 3000K 3500K 4000K
CRI	94+
Efficacy	≥ 95 lm/w
Colour Deviation	SDCM ≤ 3
Lifetime	> 60,000hrs (L80 B10)
Beam Angle	20° 38° 60°

Driver Characteristics

Power Consumption	11.9 W Typical
Nominal Voltage	240 V AC 50/60 Hz
Voltage Range	220 - 265 V AC
Power Factor	>0.93
Circuit Protection	OVP OCP OTP
Dimming	Leading & Trailing Edge (to 10%) DALI Optional

Environmental Characteristics

Ingress Protection	IP65 
Operating Temperature	-25° to 60°C

Warranty

5 Years