




## Resiled RDT8

8.5 Watts / 1050 Lumens / 90+ CRI



8.5 Watt residential LED downlight featuring a single LED COB in 3000K and 4000K colour temperature options with a high colour rendering index of 90+ and a high lumen output of 1030 lm (3000K) and 1050 lm (4000K). 78mm cut-out sizes makes the Resiled an ideal replacement for existing halogen downlights.

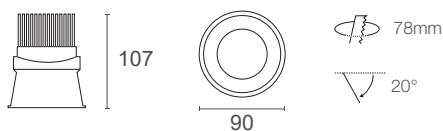

System Power 10.8W

Tilt-Angle 20°

LED Power 8.5W

Cut-Out 78mm

IP Rating IP20

Weight 205g

|                     | 3000K           | 4000K   |
|---------------------|-----------------|---------|
| COB Lumen Output    | 1030 lm         | 1050 lm |
| Total Luminous Flux | 783 lm          | 804 lm  |
| Efficacy            | 74.4 lm/W 4000K |         |

|               |                         |            |                           |                     |
|---------------|-------------------------|------------|---------------------------|---------------------|
| Dimming       | Leading + Trailing Edge | Lifetime   | 50,000hrs (L70)           |                     |
| Input Voltage | 100V - 240V AC 50/60 Hz | Protection | Thermal and Short Circuit | Power Factor > 0.95 |

| Product    | CCT                | Light Source | Beam Angle     | Trim Colour        | Driver             |
|------------|--------------------|--------------|----------------|--------------------|--------------------|
| RDT8       | 3000K 3<br>4000K 4 | 90+ CRI      | Medium Beam MB | White W<br>Black B | Leading + Trailing |
| RDT8       | 3                  |              | MB             | W                  |                    |
| RDT83-MB-W |                    |              |                |                    |                    |



**TREND**  
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020

Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au