




HIGHBAY RFA100


100 Watts / 14,000 Lumens / 80+ CRI

Compact 100W LED highbay with a high light output of 14,000 lumens with a high CRI of 80+. Sealed body manufactured from die-cast aluminium with a durable powder coated finish provides an IP66 rating making it suitable for harsh applications. Specially developed optical design provides a uniform rectangular 60° x 90° beam distribution. Supplied with integral LED driver and 1.5 meter suspension cable as standard.

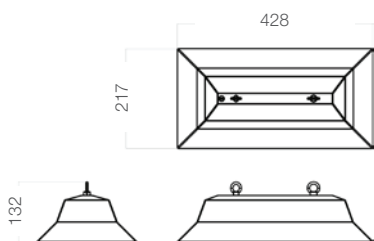

System Power	112W	Beam Angle	60x90°
LED Power	100W	Weight	4.2kg
IP Rating	IP66		

	4000K	5000K			
COB Lumen Output	14,000 lm	14,750 lm			
Total Luminous Flux	11,208 lm	11,912 lm			
Efficacy	100 lm/W 4000K	Lifetime	50,000hrs (L80)		
Dimming	Optional: Dali & 1-10v				
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit	Power Factor	> 0.95

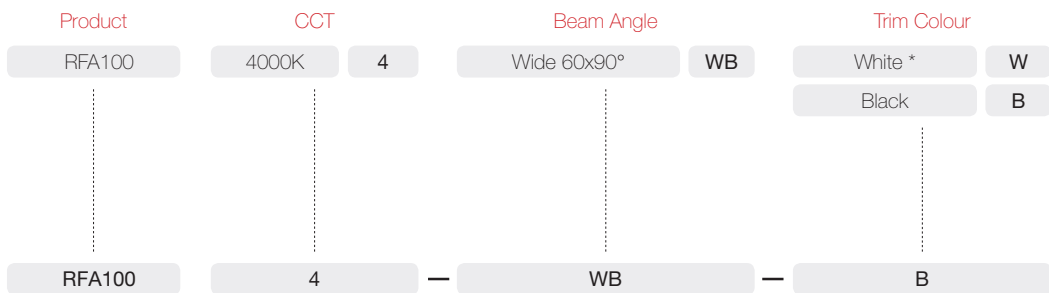

RFA1004-WB-B

* Optional



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au